



Vertical cassette blind

markilux 876 / 876 tracfix

The perfect sun protection solution which also maintains your privacy – the tensioned vertical cassette blind that can shade large surface areas.



reddot design award
winner 2017



GERMAN
DESIGN
AWARD
WINNER
2018

markilux.com

markilux

safe timeless beautiful

Product characteristics

Wind resistance class 2 | 3 (depending on size)

Beaufort 5 → 28–37 km/h → 7.5–10.4 m/s → 17–23 mph

Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph


side view, motor driven,
flat track bracket

side view, manual operation
flat track bracket



tracfix cover guidance – no gap between cover and track ¹⁾
track bracket 80 mm

reveal fixture with angled fixture bracket (fixture type 15)

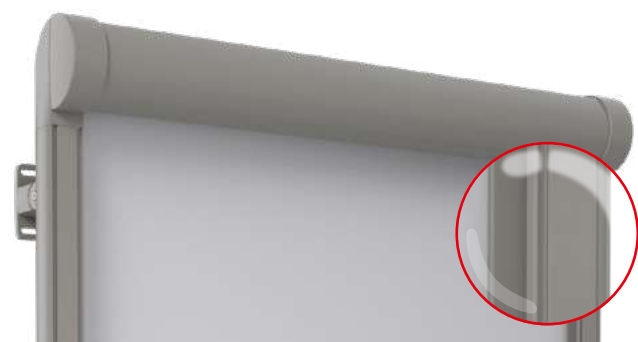

front profile finishes flush with the end of the guide tracks

fitted to a round markilux syncra post
as seen from inside



fitted to a markilux pergola 110 tracfix post
viewed from outside

fitted to a round post of the markilux construct



1) optional configuration

Product characteristics

Description

- vertical cassette blind with attractively shaped, round cassette and harmoniously matching, angular guide tracks. The ingenious tensioning system and robust construction mean that areas of up to 24 m² can be shaded.

Special features

- fully encompassing cassette that protects the cover perfectly
- the tried and tested tensioning system – with drive belts and integrated gas pistons – delivers optimum cover tension in any phase of extension
- tracfix optional: the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- panorama window optional, the transparent window made of a special foil that makes a perfect view both in and out possible – for both private and commercial applications
- the broad range of brackets with patented clip-on system offers individual fixture solutions, from discrete to conspicuous
- can be combined perfectly with other markilux awning systems

Dimensions

- single unit: 60–600 cm in width, maximum unit height 600 cm (depending on the width)
- maximum dimensions, width × unit height: 400 × 600 cm / 500 × 450 cm / 550 × 400 cm / 600 × 350 cm (without tracfix)
- maximum dimensions, width × unit height: 550 × 400 cm / 600 × 350 cm (with tracfix)
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of stainless steel

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, round, Ø 130 mm
- guide tracks angular, rounded edges, width × height 52 mm × 52 mm
- front profile rounded on the underside, smooth appearance, height × depth 110 mm × 52 mm

Side caps

- the cassette end caps are made of high-quality plastic, in two parts, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- self-supporting cassette attached to the top of the angled guide rails
- brackets for the guide tracks: face fixture, reveal fixture, post fixture (post of the markilux pergola 110 tracfix / markilux syncra / markilux construct)
- standard bracket heights: 20 mm / 85 mm / 105 mm / 145 mm (bespoke heights can be ordered)

Frame colours

markilux frame colours without surcharge

traffic white RAL 9016



metallic aluminium RAL 9006



grey brown, similar to RAL 8019



off-white textured finish, 5233 ¹⁾



stone grey metallic, 5215 ¹⁾



anthracite metallic, 5204 ¹⁾



Havana brown textured finish, 5229 ¹⁾



Non-standard powder-coated finish

Bespoke frame colours at a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

¹⁾ textured finish

Colours may differ slightly from those depicted in both hue and finish.

Dimensions and configuration options

Single unit

		Blind fixture width										Minimum fixture width	
		150	200	250	300	350	400	450	500	550	600		
Order dimensions		60	151	201	251	301	351	401	451	501	551	Hard-wired motor	Radio-contr. motor
		150	200	250	300	350	400	450	500	550	600		
Overall width		+ 5.4											
AH	150 ¹⁾											60 / 69 ¹⁾	70 / 79 ¹⁾
	200 ¹⁾												
	250 ¹⁾										2)		
	300 ¹⁾								2)	2)	2)	107 ³⁾	107 ³⁾
	350 ¹⁾						2)	2)	2)	2)	2)		
	400 ¹⁾	2)	2)	2)	2)	2)	2)	2)	2)	2)	—		
	450	2)	2)	2)	2)	2)	2)	2)	2)	—	—		
	500	2)	2)	2)	2)	2)	2)	—	—	—	—		
	550	2)	2)	2)	2)	2)	2)	—	—	—	—		
	600	2)	2)	2)	2)	2)	2)	—	—	—	—		


dimensions in cm

1) = tracfix (optional). Only available with motor drive

2) = wind resistance class 2, all other sizes meet wind resistance class 3

3) = from a unit height of 281 cm

AH = unit height



Operation

	standard	optional
crank handle, outside	✓ ¹⁾	—
crank handle, operation from the rear	—	—
crank handle, operation from inside the building	—	—
hard-wired motor	✓ ²⁾	✓
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓

1) not available in tracfix units

2) in tracfix units

Coupled blind

not available

Optional accessories

tracfix - the cover is held in the guide tracks by a zip

flexible panorama window, only in tracfix units

automatic controls (light, wind, rain)

N.B! Important background information can be found in the chapter "Optional Accessories".

Awning cover	fabric range no.	standard	optional	blind fixture width	unit height	cover manufacture
sunvas	301.. / 309..-315..	✓	—		≤ 450	LN
					≤ 400	LN
sunsilk	324.. / 325.. / 328.. / 369..	✓	—		≤ 450	LN
					≤ 400	LN
sunvas (250 cm)	31008, -09, -13, -16, -18, -25, -27, -28, -31, -36, -37, -57, -58, 31109, -14, -17	✓	—	≤ 250		N
				≤ 400	≤ 243	N
				≤ 400	≥ 244	QN
sunvas (320 cm)	31008, -09	✓	—	≤ 320		N
				≤ 400	≤ 313	N
				≤ 400	≥ 314	QN
transolair	338..	—	✓	≤ 400	≤ 243	N
				≤ 400	≥ 244	QN
				≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
				≥ 401 ≤ 550	≤ 400	LN
				≤ 600	≤ 350	LN
transolair (120 cm)	339..	—	✓		≤ 450	LN
					≤ 400	LN
perfortex	331.. / 332..	✓	—		≤ 400	LN
				≤ 550	≤ 400	LN
				≤ 600	≤ 350	LN
vuscreen Alu	317..	—	✓	≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
				≥ 401	≤ 250	N
				≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
Fibreglass Screen Fabrics	272..	—	✓	≥ 401	≤ 250	N
					≤ 249	N
					≥ 250 ≤ 400	QN
Soltis Perform 92	92-20..	—	✓	≤ 185	≤ 400	N
				≤ 400	≤ 194	N
				≥ 186 ≤ 400	≥ 195 ≤ 400	QN
				≤ 185	≤ 400	N
				≤ 400	≤ 194	N
				≥ 186 ≤ 400	≥ 195 ≤ 400	QN
perla	370..	—	—			
perla FR	374.. / 375..	—	—			

dimensions in cm

 = tracfix
















N = seamless

LN = vertical seam(s), panel width usually 120 cm

QN = horizontal seam(s)

dimensions in cm

Fixtures, fittings and accessories


 flat track bracket 78548.	 double track bracket flat 73627.	 angled bracket for bearing / motor side 50 × 50 × 8 × 80 mm 78719.
 track bracket with adjustable head 80 mm 73624.	 double track bracket with adjustable head 80 mm 73631.	 universal track bracket 80 mm 73629.
 track bracket with adjustable head 100 mm 76046.	 double track bracket with adjustable head 100 mm 73634.	 universal track bracket 100 mm 76054.
 track bracket with adjustable head 140 mm 76048.	 double track bracket with adjustable head 140 mm 73636.	 universal track bracket with adjustable head 140–500 mm 76053.
 decorative cap for a square track brackets standard accessory for bracket 2 × 76718.	 bolt reduction assembly M10 → M6 / SW 13 30 mm length pack 10 pcs 8440381	 stand-off fixing tube 30 × 10 × 1000 mm N.B! max. stand-off distance 120 mm 701668

dimensions in mm


Fixture types

04


10
clearance 20 mm

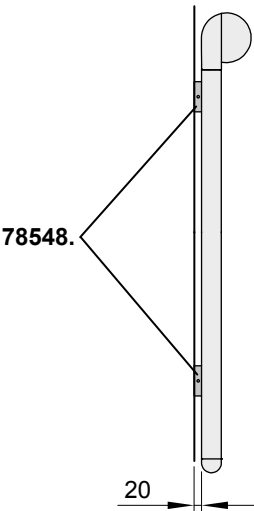


15
by angled bracket
to the side

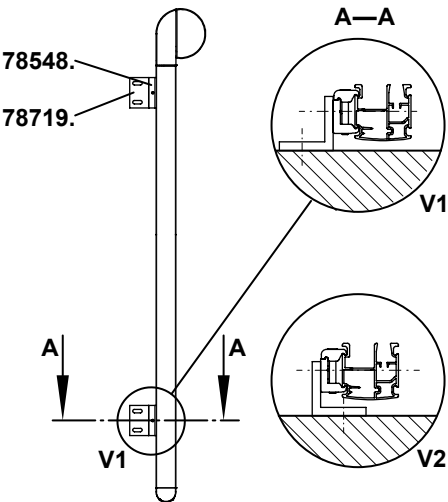


20
clearance 85 mm

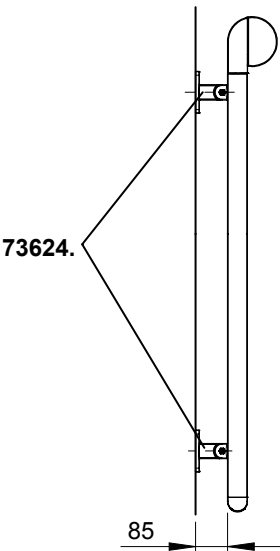

21
clearance 105 mm

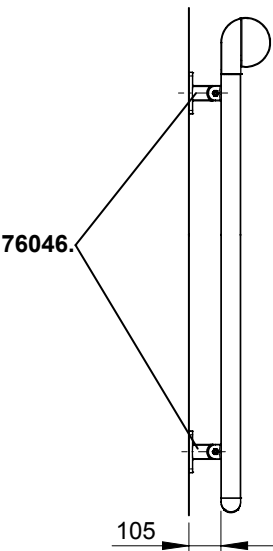

22
clearance 145 mm

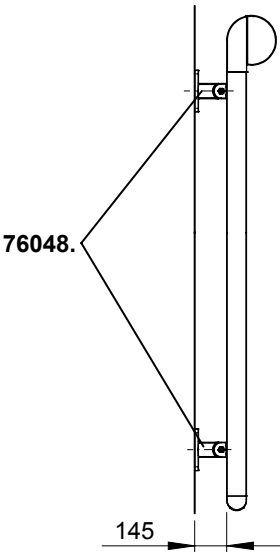


Individual choice of brackets: see “Fixtures (optional)”
When unit height > 300 cm always with 3 brackets per guide track.


dimensions in mm

Fixture types


Dimension overview

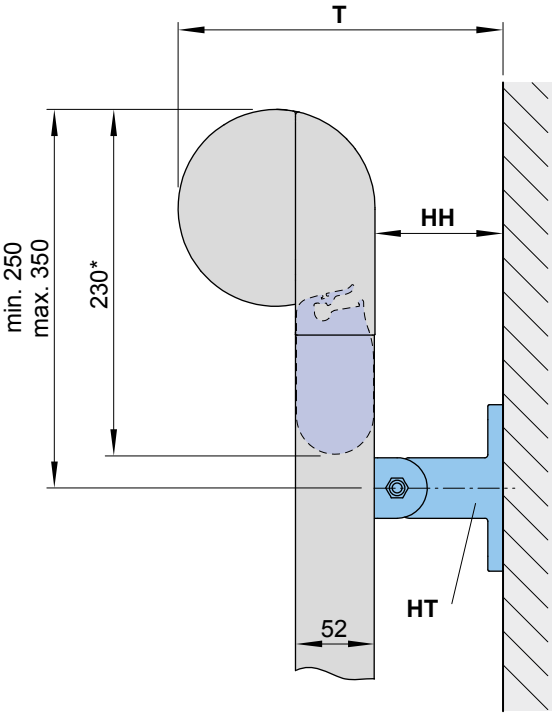

Fixture type 10

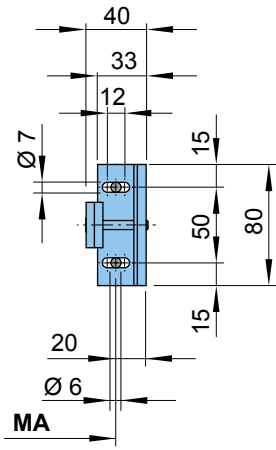

Fixture types 20, 21 and 22

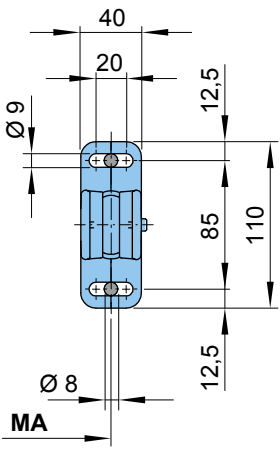


		Fixture type 10	Fixture type 20	Fixture type 21	Fixture type 22
HT	= bracket	78548.	73624.	76046.	76048.
HH	= bracket height	20	85	105	145
T	= overall height	150	215	235	275
*	= unit height when retracted				
MA	= <i>order dimension</i> = blind fixture width = fixture width				

dimensions in mm

Dimension overview

Single unit

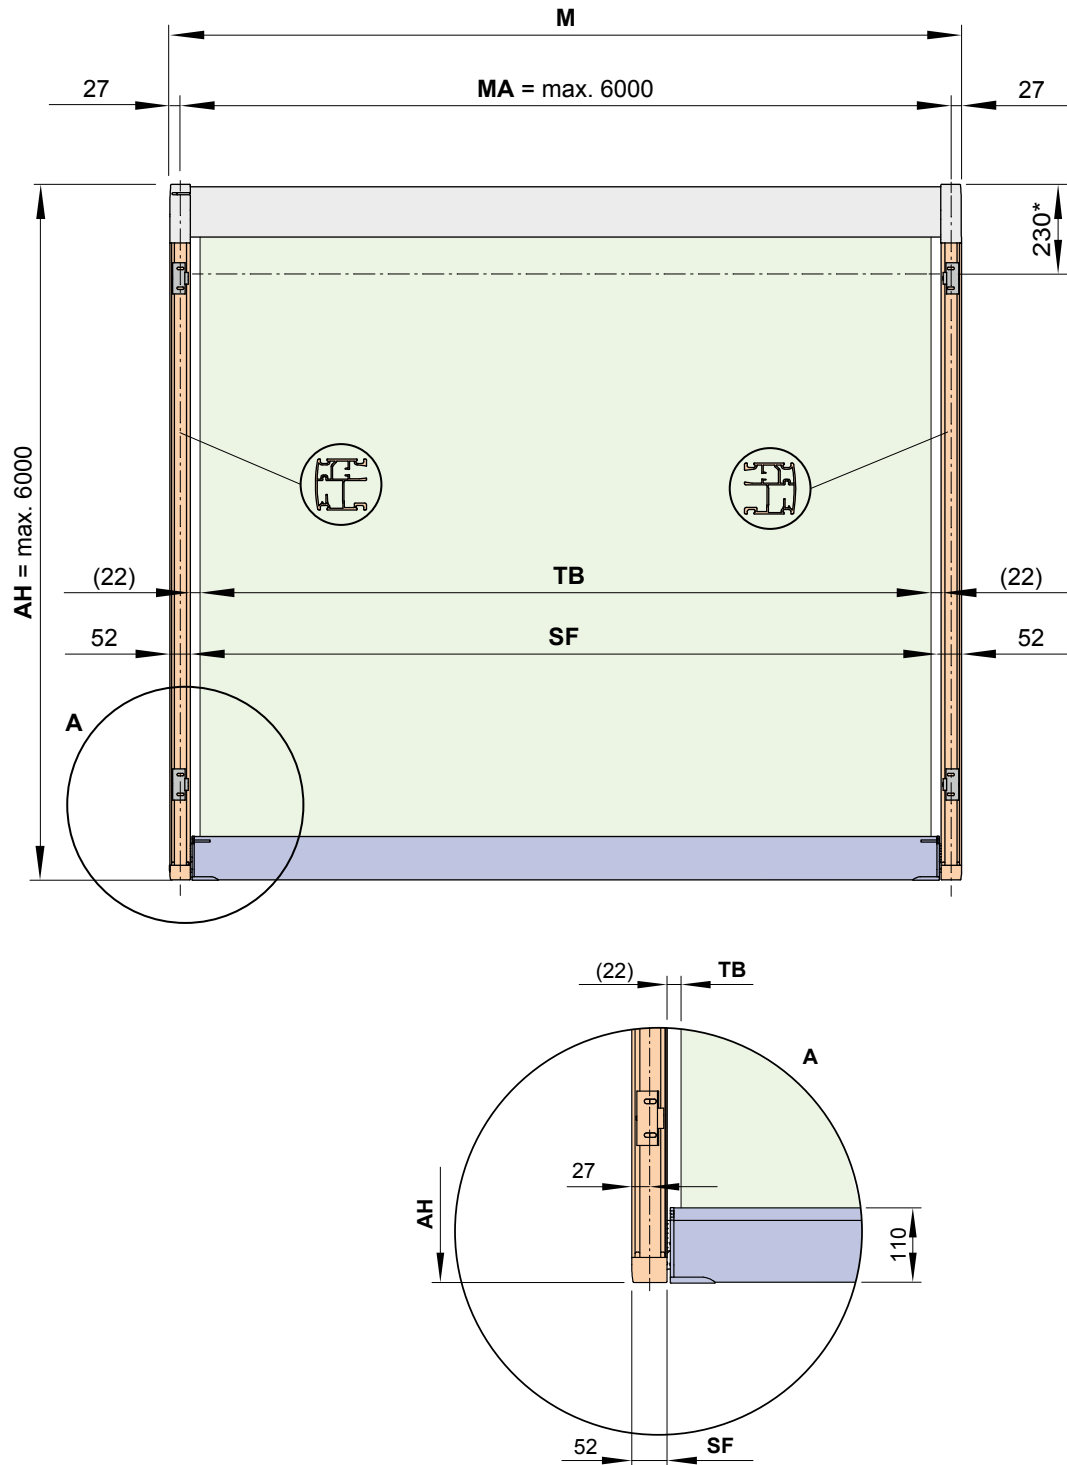


- *** = height of cassette including front profile, retracted
- (...)** = gap between cover and guide track (non-tracfix units)
- AH** = *order dimension* = unit height
- M** = overall blind width
- MA** = *order dimension* = blind fixture width = fixture width
- SF** = visible cover (in tracfix systems)
- TB** = cover width

dimensions in mm

Dimension overview

Two single units, fixture via double track brackets

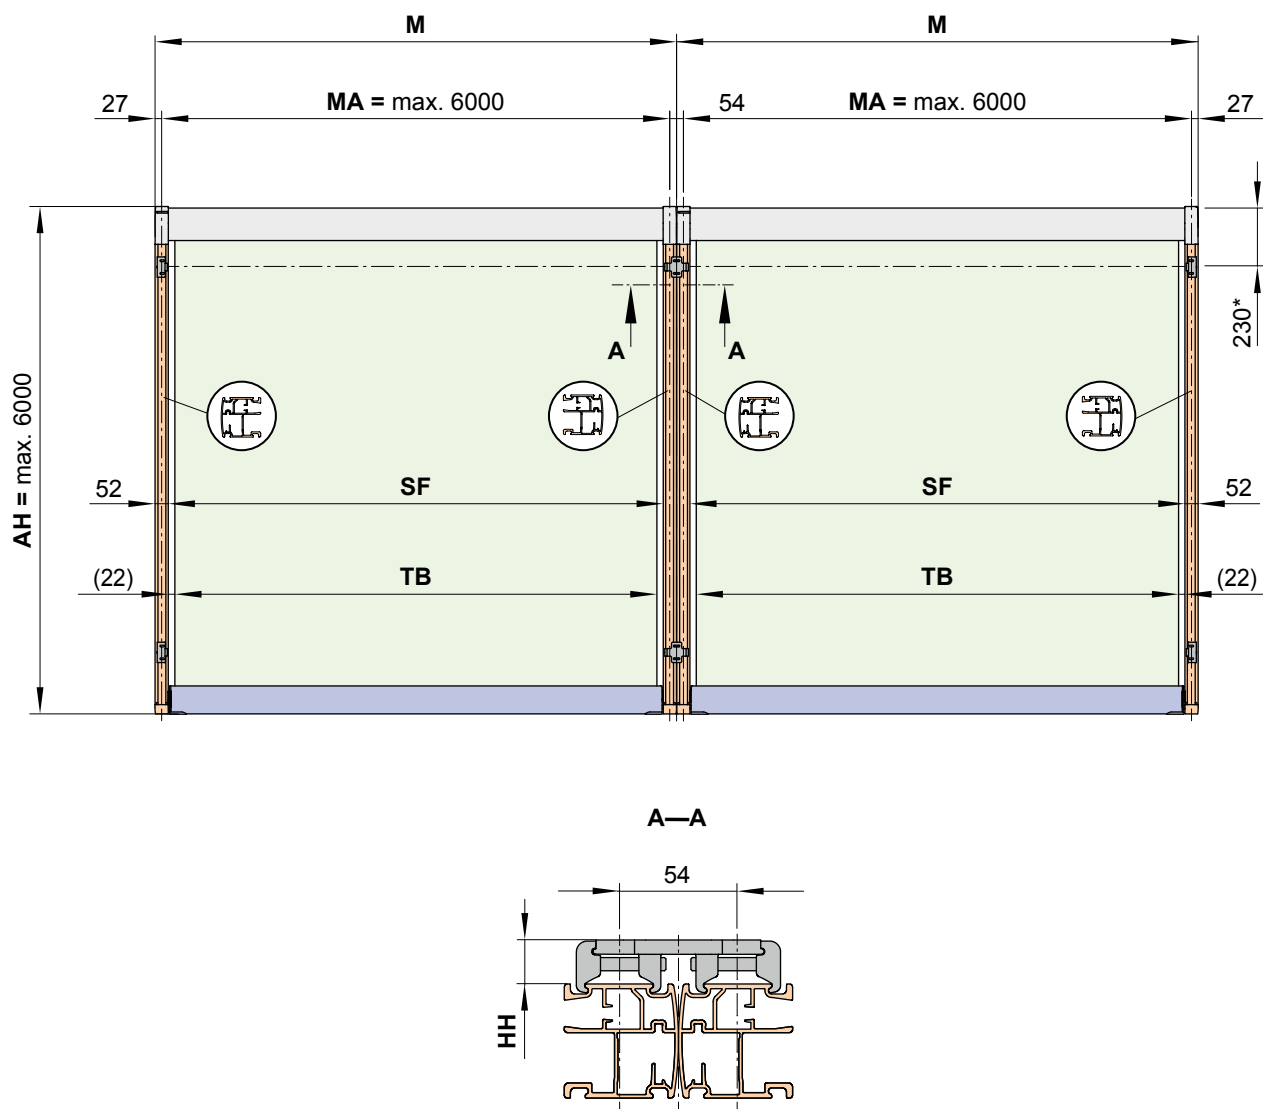


- * = height of cassette including front profile when retracted
- (...) = gap between cover and guide track (non-tracfix units)
- AH = *order dimension* = unit height
- HH = bracket height
- M = overall blind width
- MA = *order dimension* = blind fixture width = fixture width
- SF = visible cover (in tracfix systems)
- TB = cover width


dimensions in mm

Dimension overview

Top window well fixture, motor drive

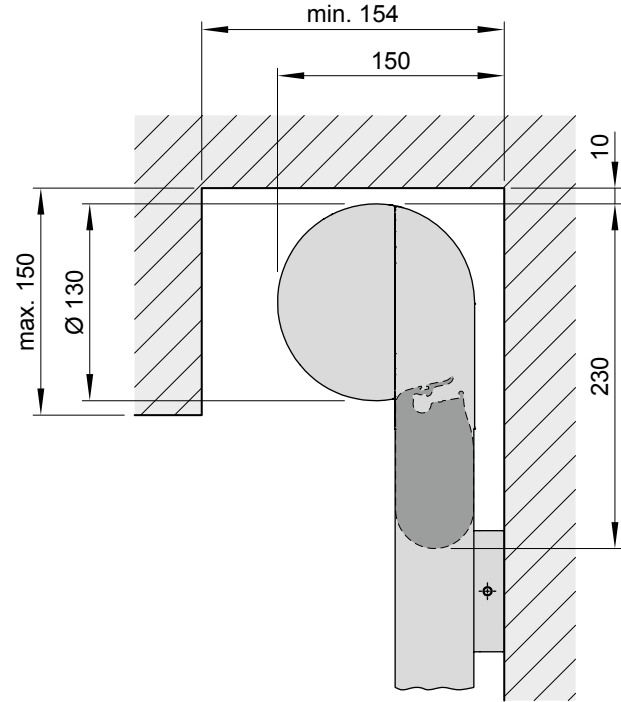


Top window well fixture, manual operation

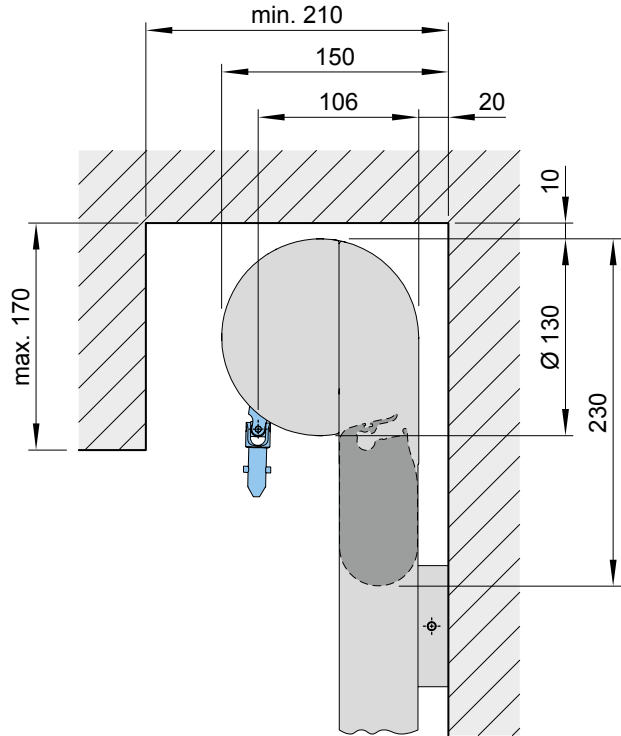

dimensions in mm


Dimension overview fixture types 10, 15

Fixtures, fittings and accessories

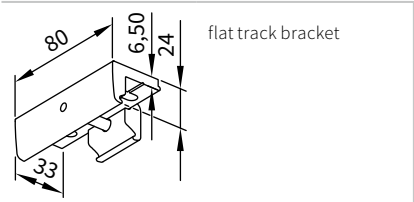

flat track bracket


78548.

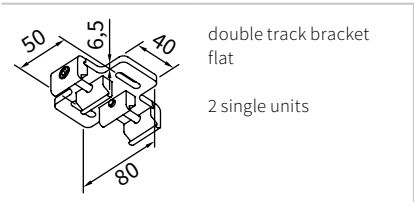

double track bracket flat

2 single units


73627.

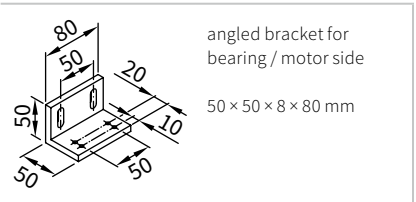

angled bracket for bearing / motor side


50 × 50 × 8 × 80 mm

78719.

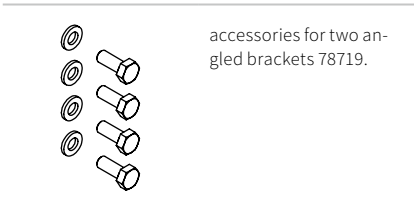

accessories for two angled brackets 78719.

787211

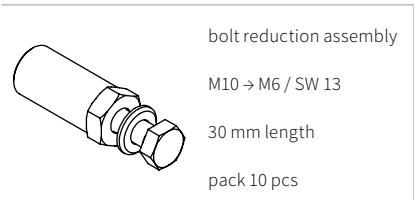


bolt reduction assembly

M10 → M6 / SW 13

30 mm length

pack 10 pcs

8440381

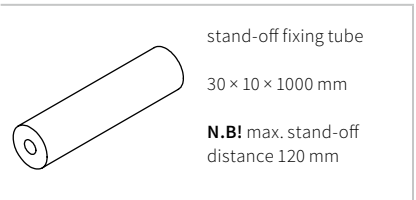


stand-off fixing tube

30 × 10 × 1000 mm

N.B! max. stand-off distance 120 mm

701668

Fixture type 10, as seen from inside

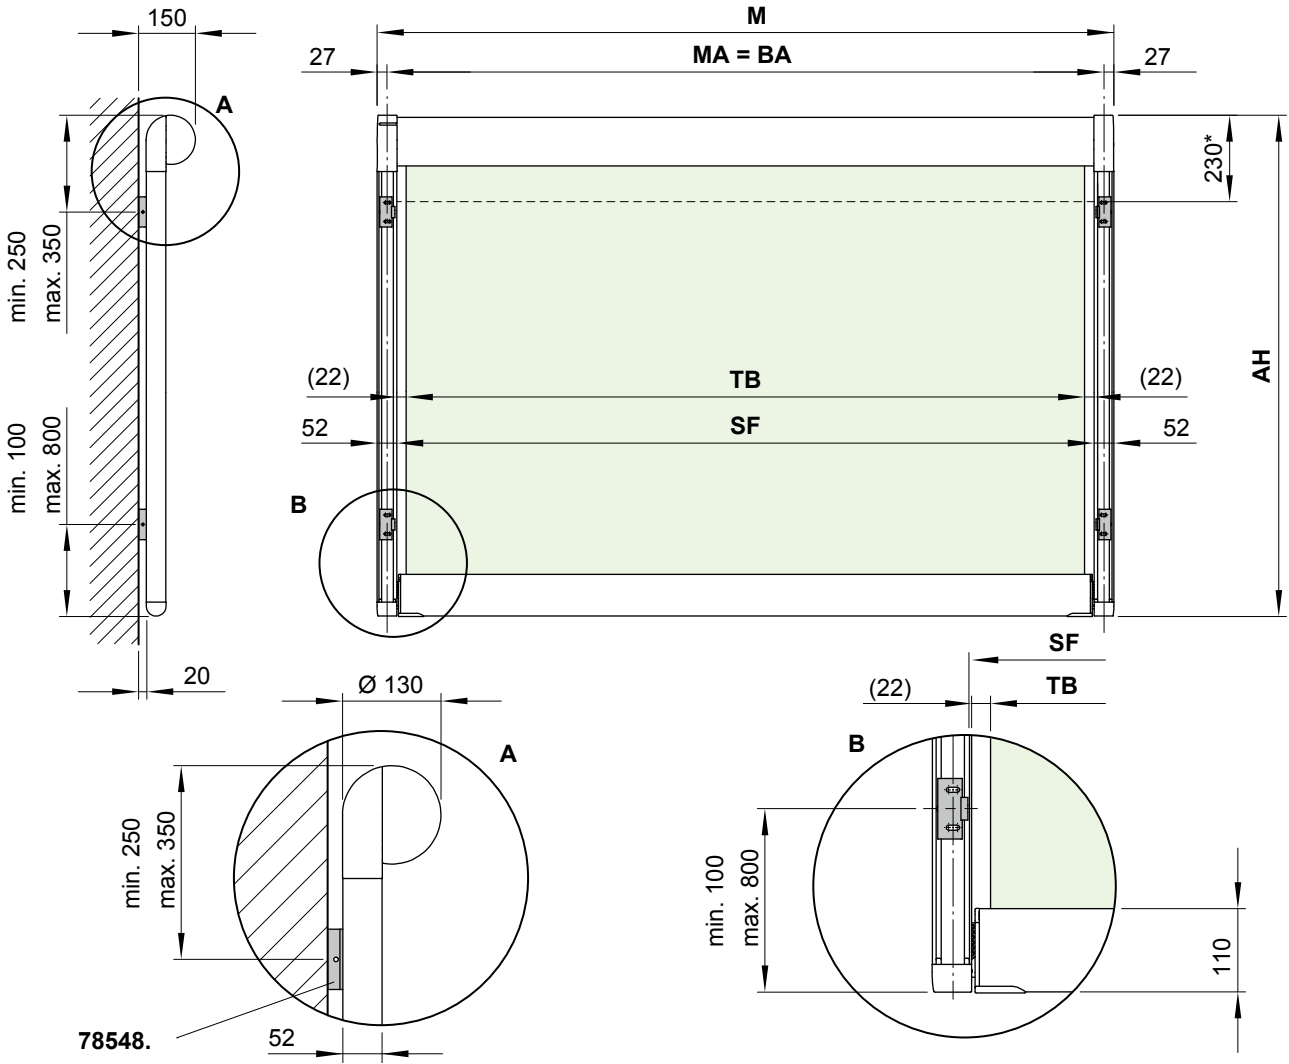

- * = height of cassette including front profile, retracted

(...) = gap between cover and guide track (non-tracfix units)

AH = **order dimension** = unit height

BA = width between fixture points
- M = overall blind width = MA + 54 mm

MA = **order dimension** = blind fixture width = fixture width


SF = visible cover area

TB = cover width

dimensions in mm

Dimension overview fixture types 10, 15

Fixture type 15, as seen from inside



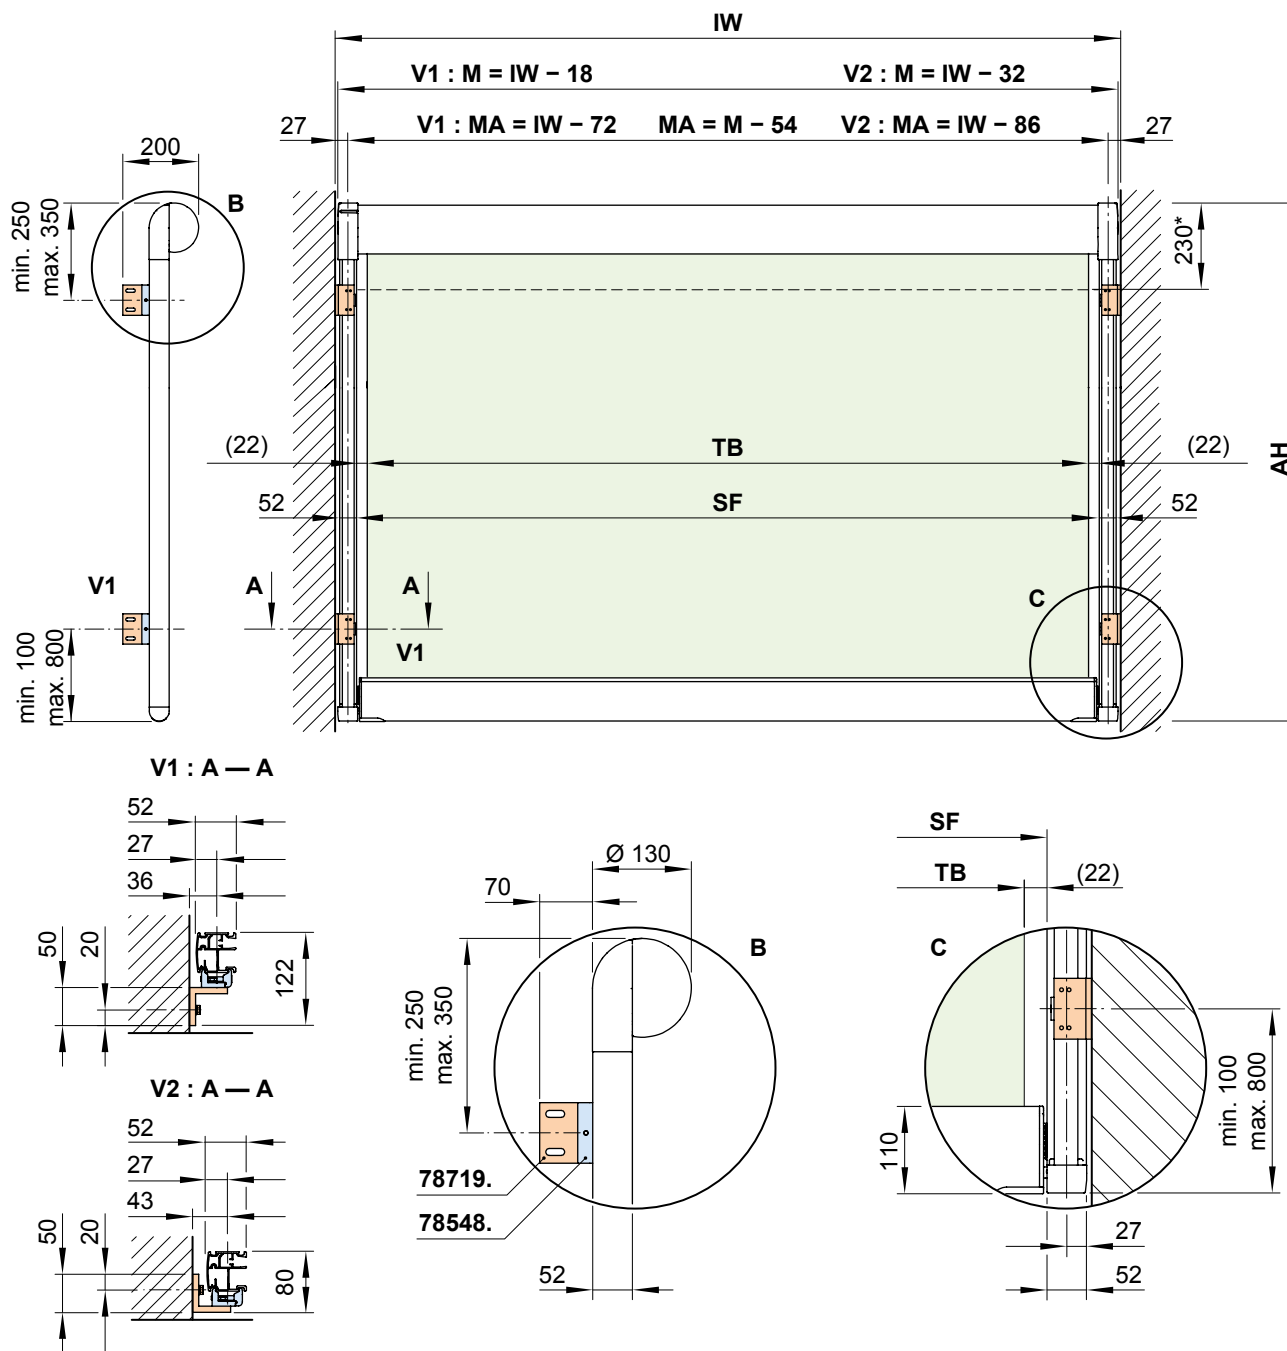


- * = height of cassette including front profile, retracted
- (...) = gap between cover and guide track (non-tracfix units)
- AH = unit height
- IW = reveal width
- M = overall blind width = MA + 54 mm
- MA = *order dimension* = blind fixture width = fixture width
- SF = visible cover area
- V1, V2 = variants





dimensions in mm

Fixtures, fittings and accessories – fixture types 20, 21, 22



Fixtures, fittings and accessories – fixture type 20

 track bracket with adjustable head 80 mm 73624.	 double track bracket with adjustable head 80 mm 73631.	 universal track bracket 80 mm 73629.
---	--	--



Fixtures, fittings and accessories – fixture type 21

 track bracket with adjustable head 100 mm 76046.	 double track bracket with adjustable head 100 mm 73634.	 universal track bracket 100 mm 76054.
 track bracket with adapter plate 76199.		

Fixtures, fittings and accessories – fixture type 22


 track bracket with adjustable head 140 mm 76048.	 double track bracket with adjustable head 140 mm 73636.
--	---

Accessories

 bolt reduction assembly M10 → M6 / SW 13 30 mm length pack 10 pcs 8440381	 stand-off fixing tube 30 × 10 × 1000 mm N.B! max. stand-off distance 120 mm 701668
---	--

dimensions in mm



Overview of dimensions, fixture type 20, 21, 22

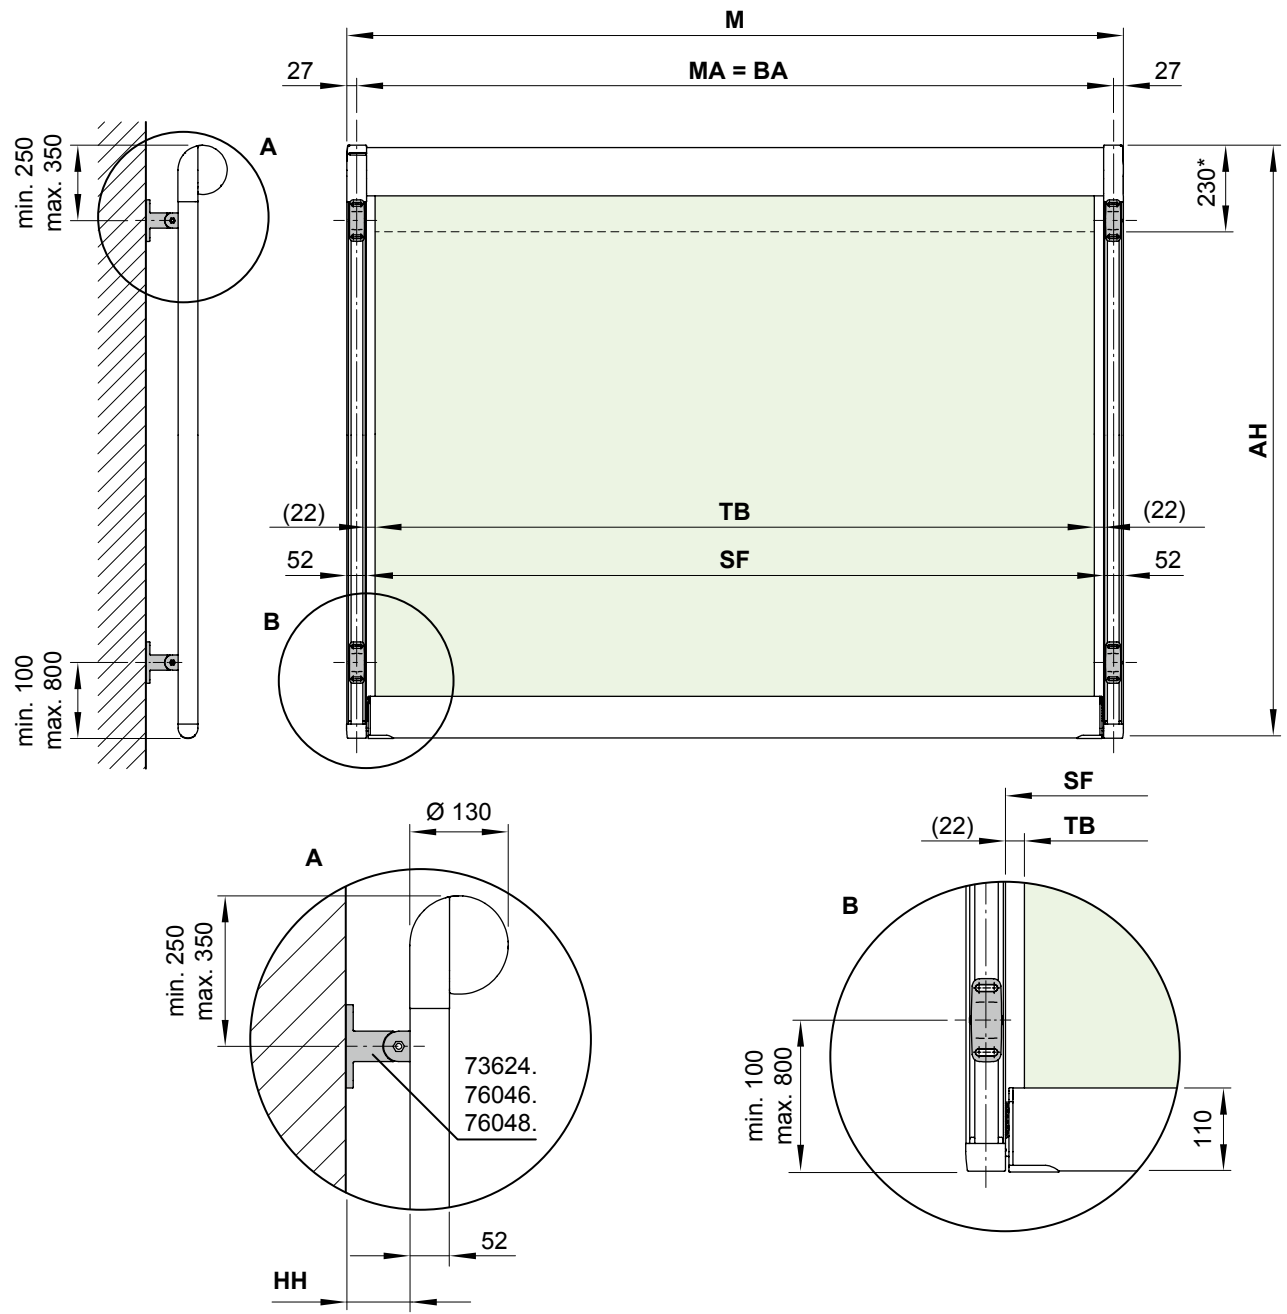

* = height of cassette incl. front profile when retracted
(...) = gap between cover and guide track (non-tracfix units)
AH = *order dimension* = unit height

BA = width between fixture points
HH = bracket height
M = overall blind width
MA = *order dimension* = blind fixture width = fixture width
SF = visible cover (in tracfix systems)
TB = cover width
dimensions in mm

Dimensions, fixture to the post of the markilux pergola 110 tracfix

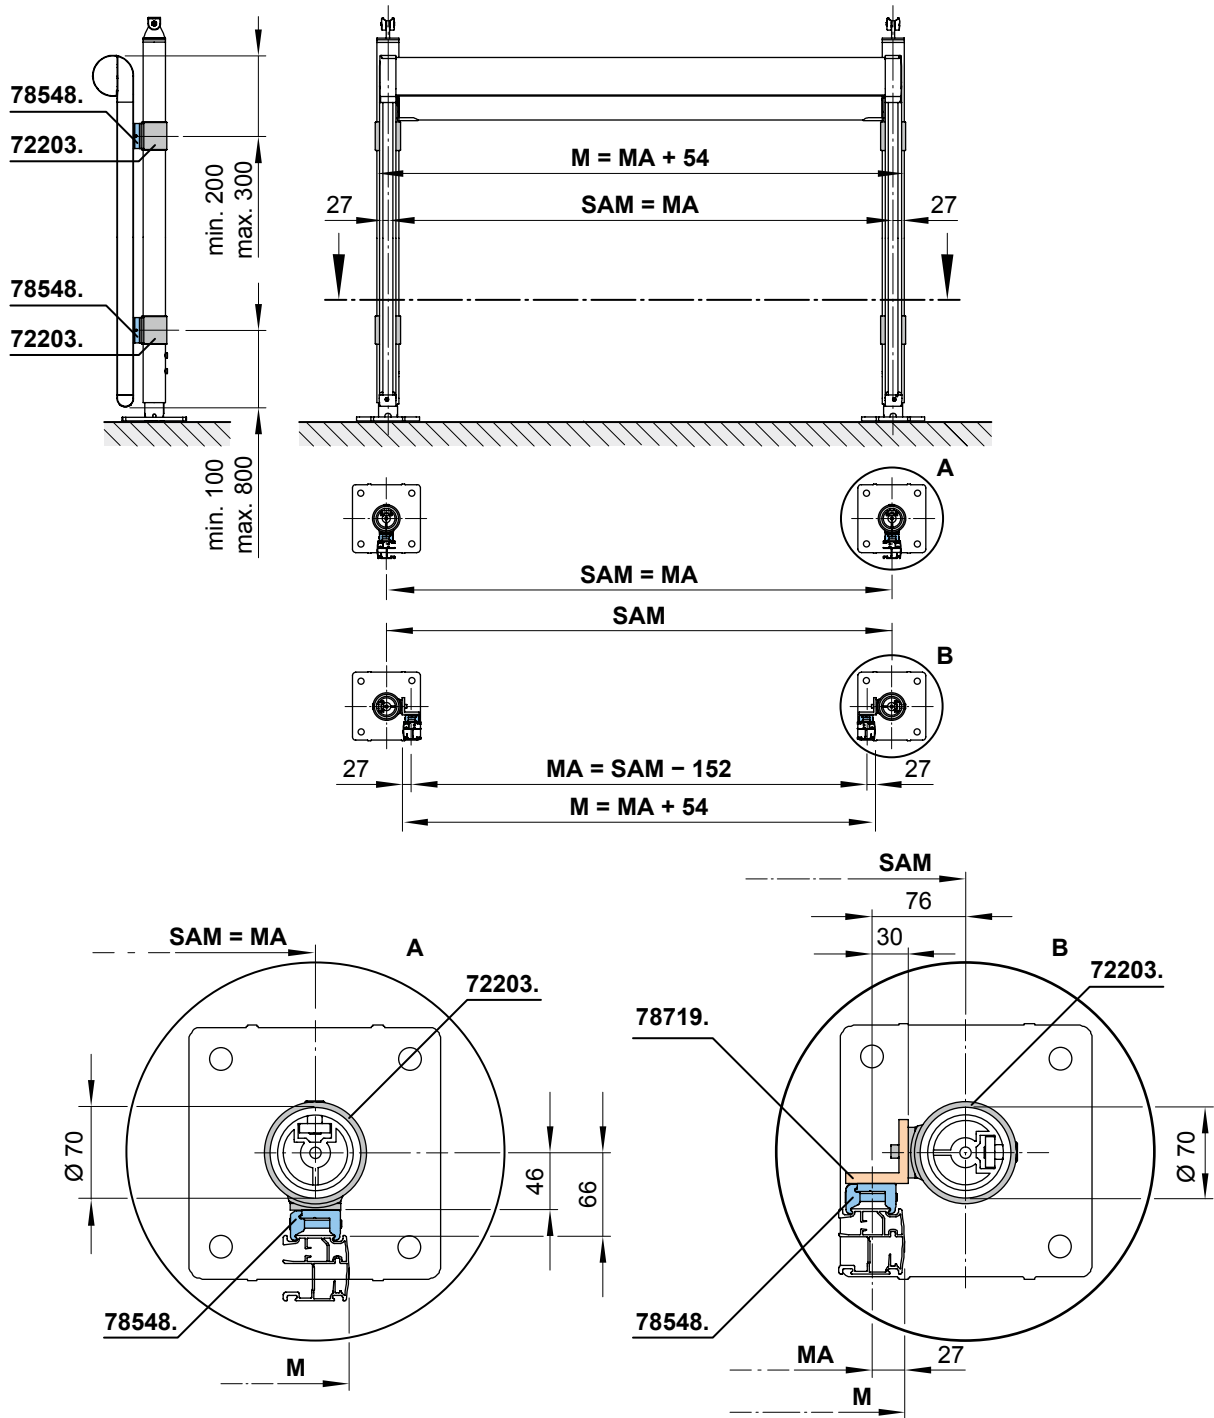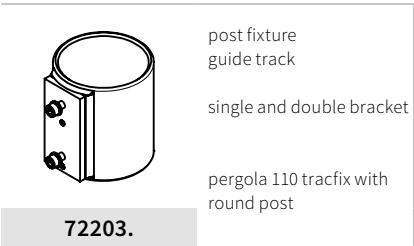


- A = detailed drawing fixture type 10
- B = detailed drawing fixture type 15
- M = overall blind width = $MA + 54$ mm
- MA = *order dimension* = blind fixture width = fixture width
- SAM = post separation centre to centre

dimensions in mm


Dimensions, combination of markilux syncra / markilux construct

Fixture to a round post




post fixture
guide track
centre, both sides
round post

79557.




post fixture
guide track
corner, both sides
round post

79556.



post fixture
guide track
corner, one side
round post







79558.



post fixture
guide track
single and double bracket
round post

72206.

Please note: When fixing to the markilux syncra / markilux construct only 2 brackets per track are needed!

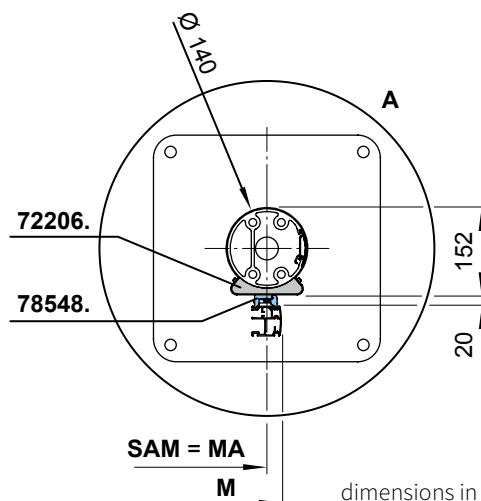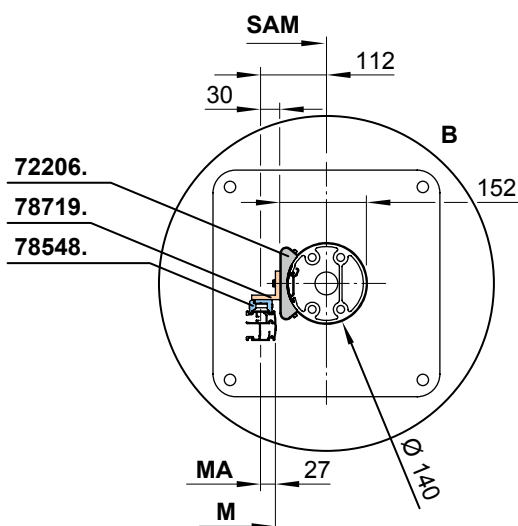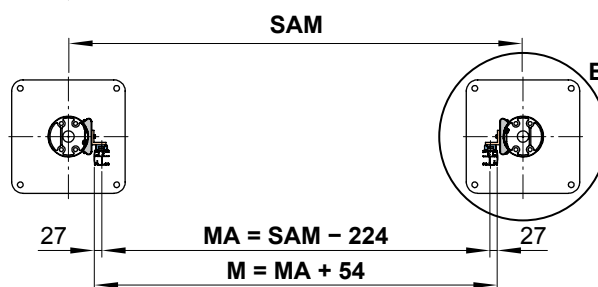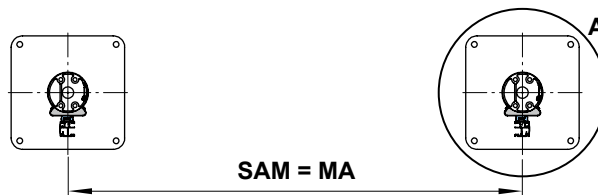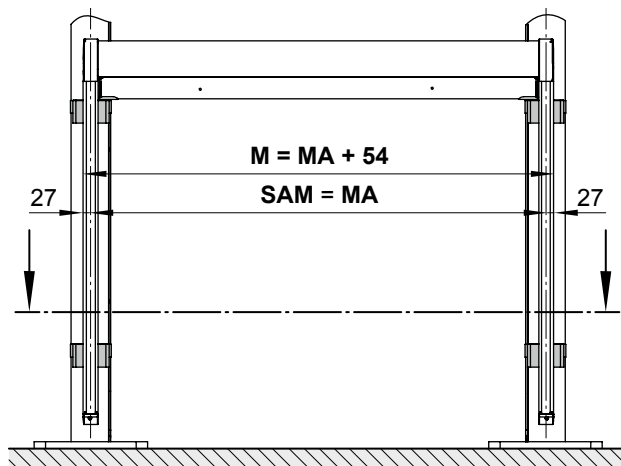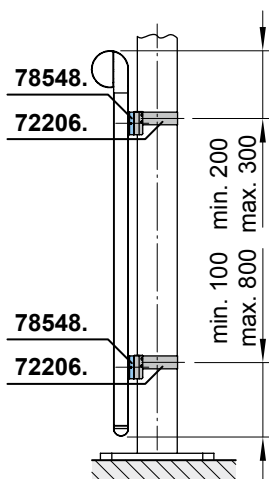


dimensions in mm

- A = detailed drawing fixture type 10
- B = detailed drawing fixture type 15
- M = overall blind width = $MA + 54$ mm
- MA = *order dimension* = blind fixture width = fixture width
- SAM = post separation centre to centre


Dimensions, combination of markilux syncra / markilux construct

Fixture to a square post




post fixture
guide track
centre, both sides
square post

72234.




post fixture
guide track
corner, both sides
square post

72233.



post fixture
guide track
corner, one side
square post




72235.



post fixture
guide track
single and double bracket
square post

72232.

Please note: When fixing to the markilux syncra / markilux construct only 2 brackets per track are needed!

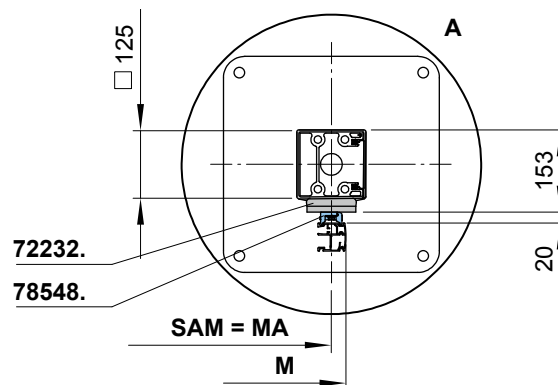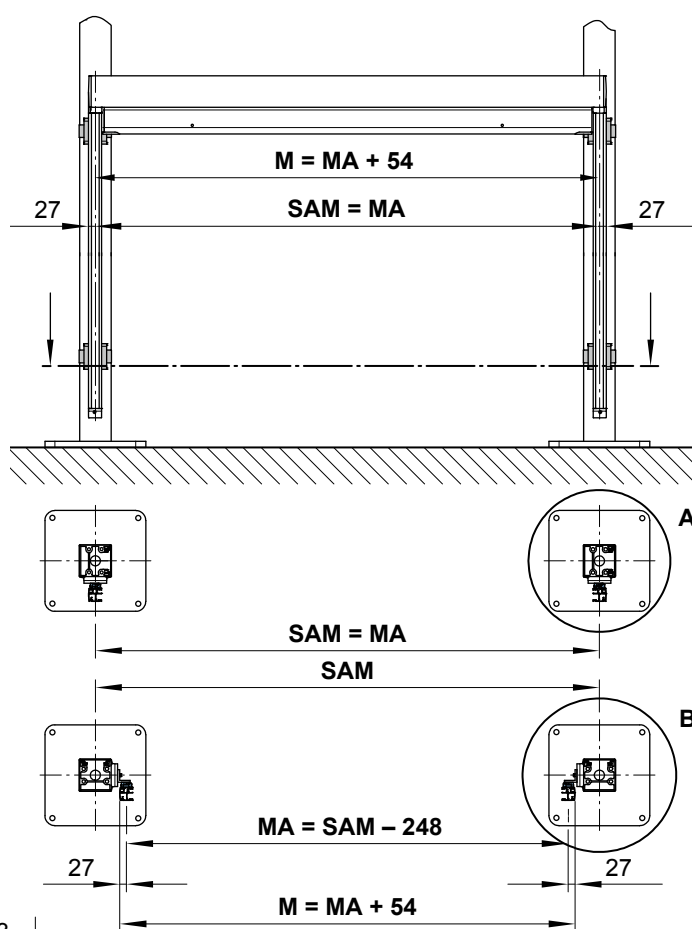
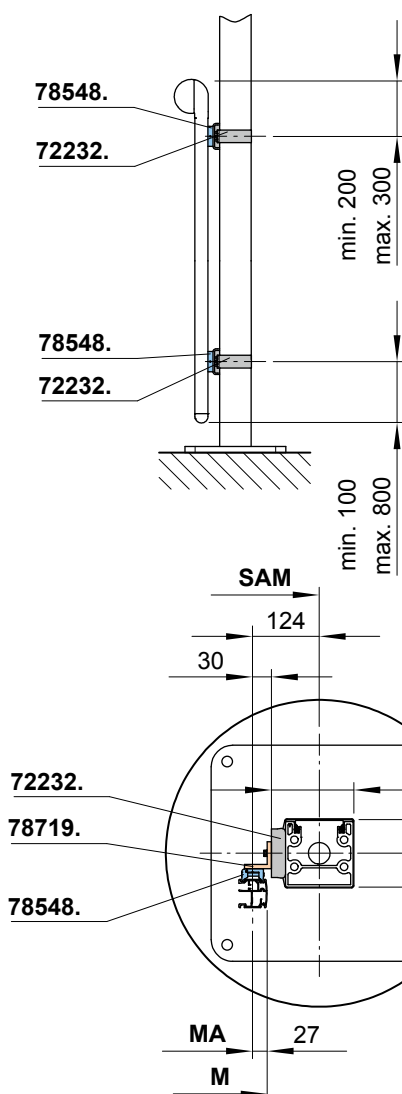


- A = detailed drawing fixture type 10
 B = detailed drawing fixture type 15
 M = overall blind width = $MA + 54$ mm
 MA = *order dimension* = blind fixture width = fixture width
 SAM = post separation centre to centre

dimensions in mm

Dimensions, combination of markilux syncra / markilux construct

Fixture of one blind to a corner post

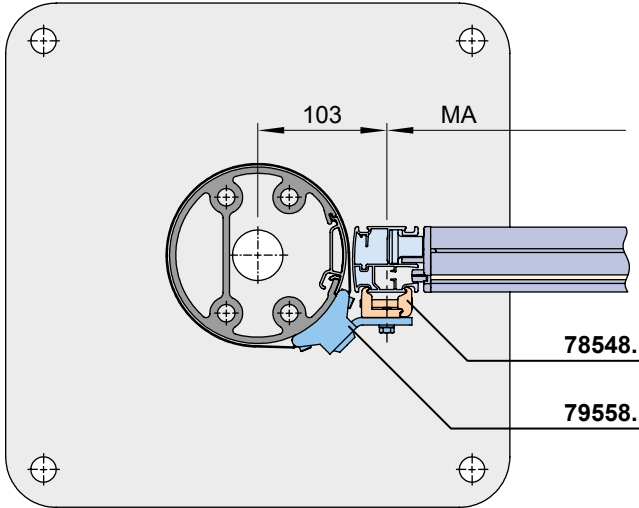
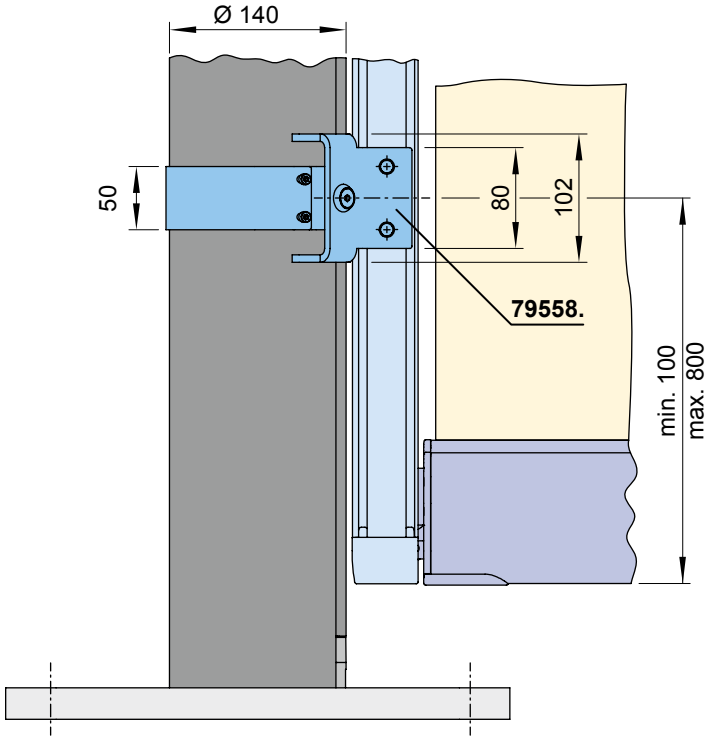


MA = order dimension = blind fixture width = fixture width

dimensions in mm

Dimensions, combination of markilux syncra / markilux construct

Fixture of two blinds to a corner post

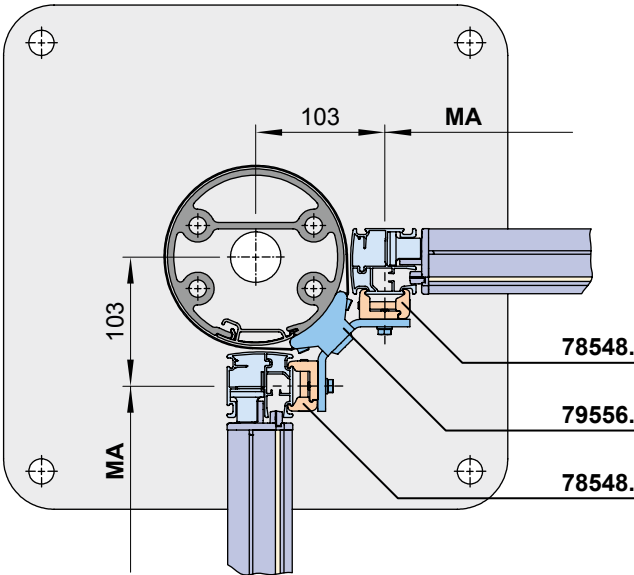
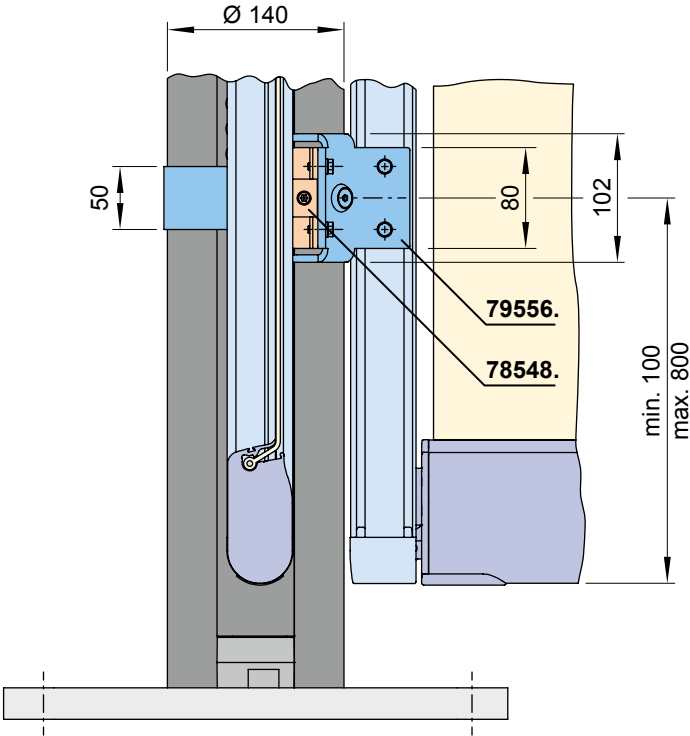


MA = order dimension = blind fixture width = fixture width

dimensions in mm

01 **Dimensions, combination of markilux construct**


02 Fixture of two blinds to a central post

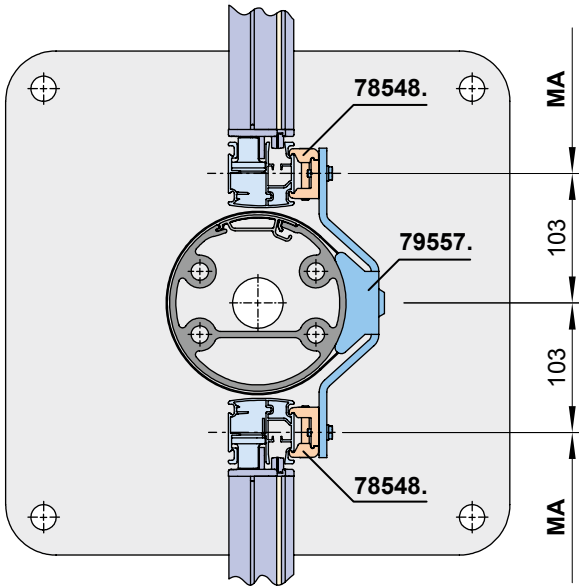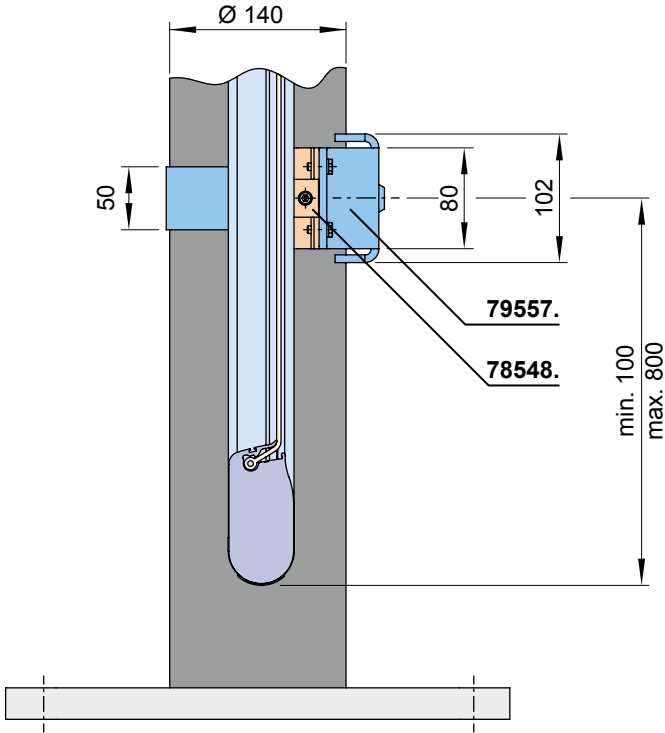

MA = order dimension = blind fixture width = fixture width

dimensions in mm

Motor cable exit point

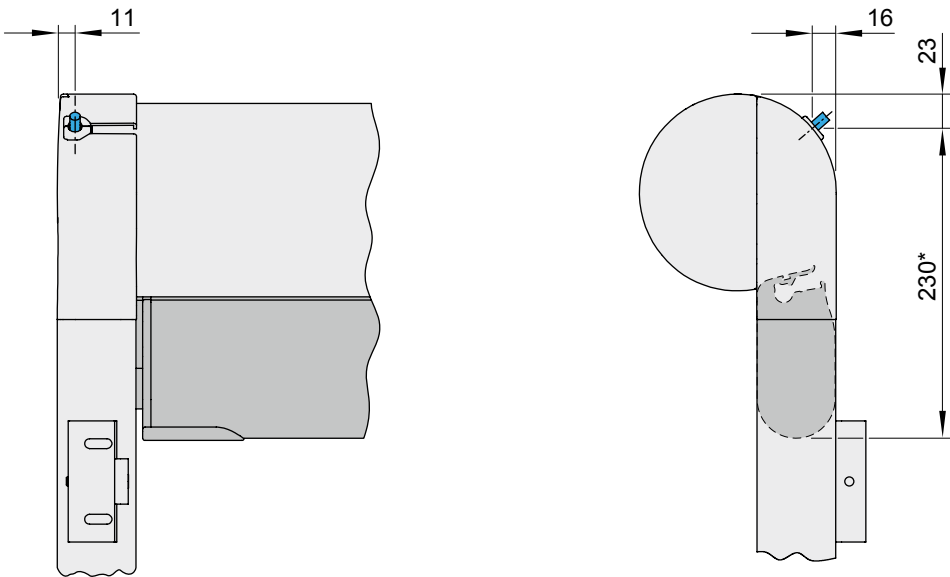

* = unit height when retracted

dimensions in mm

- 01
- 02
- 03
- 04**
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20