



Underglass Awning

markilux 779 / 779 tracfix

The perfect underglass awning for large areas. The angular frame design throughout emphasizes design emphasizes the lines of each and every glass canopy.



reddot design award
winner 2017


markilux.com




markilux
safe timeless beautiful

Product characteristics

Wind resistance class 2 | 3 (depending on size)
 Beaufort 5 → 28–37 km/h → 7.5–10.4 m/s → 17–23 mph |
 Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph

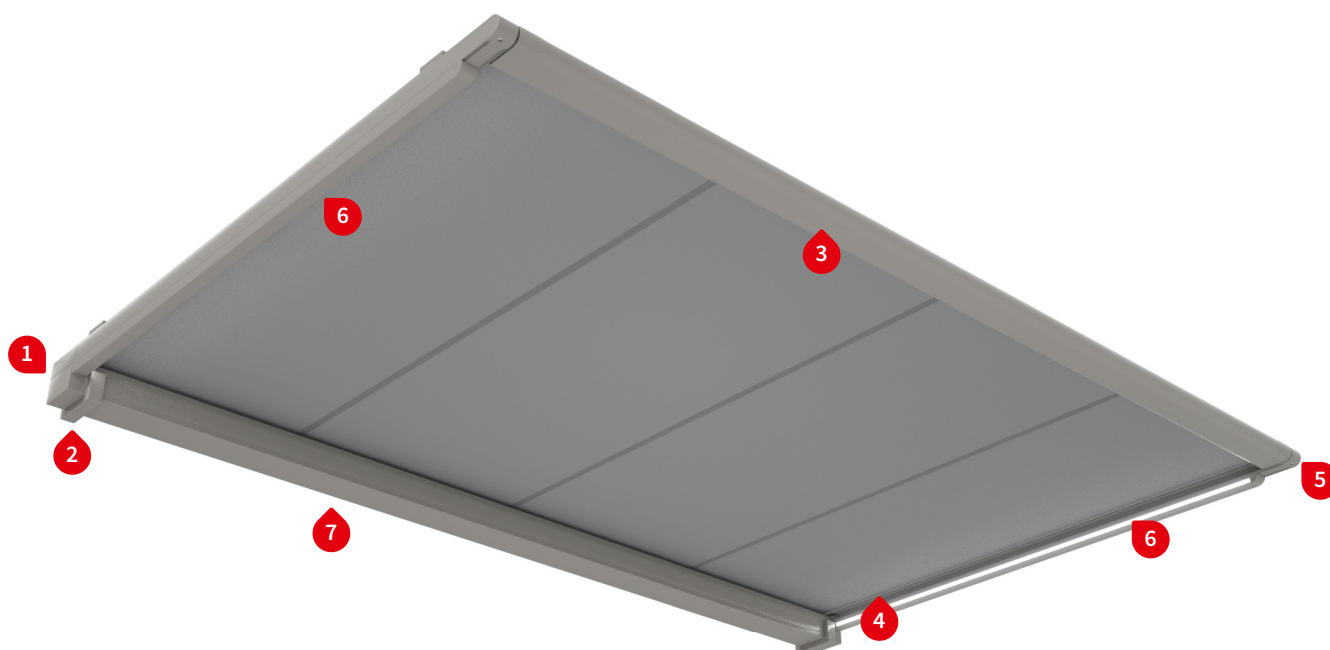


1 side view: motor drive, flat track bracket

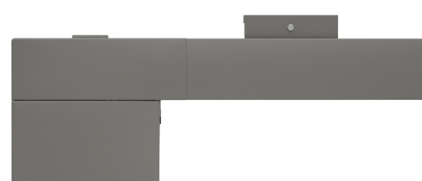


1 side view: crank handle operation




2 cable feed for lighting options

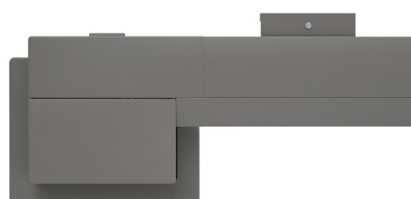


3 shadeplus during extension

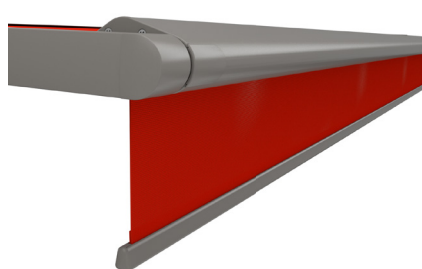


4 tracfix cover guidance – no gap between cover ¹⁾

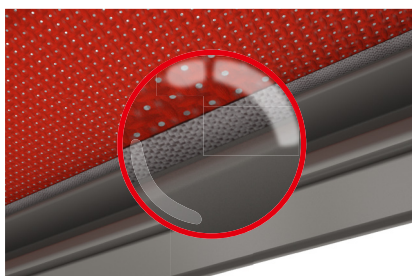


5 when extended, the front profile finishes flush with the end of the guide tracks

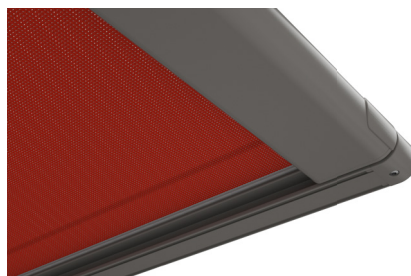

6 LED-Line fitted to the guide track ¹⁾

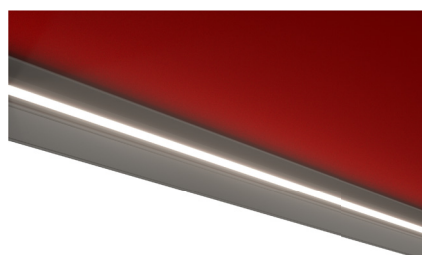

7 LED-Line in the cassette ¹⁾

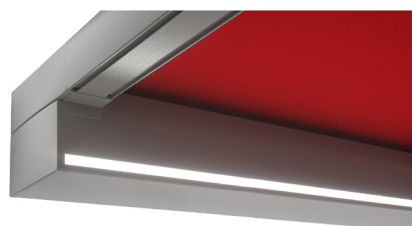

1) Optional accessories

Product characteristics

Description

- underglass awning with cleanly designed, quadratic cassette and harmoniously matched, angular guide tracks.
- the ingenious tensioning system and the sturdy design allow areas of up to 27 m² to be shaded.

Special features

- fully encompassing cassette that protects the cover perfectly
- tried-and-tested tensioning system with drive belts and integrated gas pistons – delivers optimum cover tension – in any phase of extension
- tracfix optional: the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- various lighting combinations available: light strip LED-Line RGB-WW in the cassette, LED-Line RGB-WW in the guide tracks – individually configurable lighting options providing a pleasant atmosphere in the evening
- option of a drop valance with a height of 150 cm or 210 cm (depending on the fabric series chosen) – protection against low-lying sun, wind and inquisitive glances integrated into the front profile, with manual operation
- the broad range of brackets with patented clip-on system offers individual fixture solutions

Dimensions

- single unit: 60–600 cm in width, maximum extension 600 cm (depending on the width)
- maximum dimensions, width × extension: 400 × 600 cm / 600 × 450 cm (without tracfix system)
- maximum dimensions, width × extension: 600 × 450 cm (with tracfix system)
- intermediate sizes are available

Roller tube and lateral bearings

- Round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of stainless steel

Blind profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, square, height × depth 125 mm × 125 mm
- guide tracks angular, rounded edges, width × height 52 mm × 52 mm
- front profile rounded at the front, depth × height 110 mm × 52 mm, shadeplus profile depth × height 139 mm × 66 mm

Side caps

- the cassette end caps are made of die-cast aluminium, in two parts, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- cassette is self-supporting on guide tracks
- brackets for the guide tracks: flat track brackets, stand-off brackets, reveal fixture
- standard bracket heights: 20 mm / 85 mm / 105–145 mm (bespoke heights can be ordered)
- other accessories are available

01 **Frame colours**

02 **markilux frame colours without surcharge**

03 traffic white, RAL 9016



metallic aluminium, RAL 9006



grey brown, similar to RAL 8019



07 off-white textured finish, 5233 ¹⁾



stone grey metallic, 5215 ¹⁾



anthracite metallic, 5204 ¹⁾



12 havana brown textured finish, 5229 ¹⁾



17 **Non-standard powder-coated finish**

18 Bespoke frame colours incur a surcharge – matt, metallic, finely textured and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

19 Colours may differ slightly from those depicted in both hue and finish.

20

1) textured finish

Dimensions and configuration options

Single unit

		Awning fixture width										Minimum fixture width	
		150	200	250	300	350	400	450	500	550	600	Hard-wired motor	Radio-controlled motor
Order dimensions		60 150	151 200	201 250	251 300	301 350	351 400	401 450	451 500	501 550	551 600		
Overall width		+ 5,4											
H	150 ¹⁾											60 [72]	70 [82]
	200 ¹⁾												
	250 ¹⁾										2)		
	300 ¹⁾							2)	2)	2)	2)		
	350 ¹⁾					2)	2)	2)	2)	2)	2)	107 ³⁾	107 ³⁾
	400 ¹⁾	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)		
	450 ¹⁾	2)	2)	2)	2)	2)	2)	2)	2)	2)	2)		
	500	2)	2)	2)	2)	2)	2)	—	—	—	—		
	550	2)	2)	2)	2)	2)	2)	—	—	—	—		
	600	2)	2)	2)	2)	2)	2)	—	—	—	—		

dimensions in cm

1) = tracfix (optional). Only available with motor

2) = meets wind resistance class 2, all other sizes meet wind resistance class 3

3) = from an extension of 281 cm

H = extension

[...] = dimensions in the case of tracfix units

 = 4 brackets

 = 6 brackets

 = 6 brackets,
1 stainless steel cover support wire

Operation	standard	optional
crank handle	✓ ¹⁾	—
hard-wired motor	✓ ²⁾	—
silentec motor (optionally with an external io receiver) ¹⁾	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓

1) Not with tracfix

2) With tracfix

Coupled awnings

not available

Shadeplus	standard	optional
height depends on fabric pattern, see table "Shadeplus cover"		
awning fixture width minimum 201 cm – maximum 500 cm		
crank handle	✓	—
hard-wired motor	—	—
radio-controlled motor io, 868 MHz	—	—
radio-controlled motor RTS, 433 MHz	—	—

Optional accessories

tracfix – cover guidance system holding the cover neatly in the guide rails
shadeplus, manual
LED Line RGB-WW attached to the guide tracks
LED Line RGB-WW in the cassette
infrared heater 2500 W
infrared heater 2500 W with integrated radio-controlled receiver 868 MHz io
Automatic controls (light, wind, rain)

N.B. Important background information can be found in the chapter "Optional Accessories".

sunvas Fabric pattern 309.. – 315.. **smart art** 340..
transolair 339.. **sunsilk** 324.. / 328.. / 369..
perla FR 371..³⁾ / 372..³⁾

Fabric width 120 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		250									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

sunvas Fabric pattern 31008²⁾, -09²⁾, -13, -16, -18, -25, -27, -28, -31, -36, -37, -57, -58, 31109, -14, -17

Fabric width 250 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		243									
		300			2)	2)	2)				
		350			2)	2)	2)				
		400			2)	2)					
		450			2)	2)					
		500			2)	2)					
		550			2)	2)					
		600			2)	2)					

2) also available in fabric width 320 cm – then seamless

sunbow Fabric pattern 411.. - 427..

Fabric width 120 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		250									
		300									
		350	3)	3)	3)	3)	3)	3)	3)	3)	3)
		400	3)	3)	3)	3)	3)	3)	3)	3)	3)
		450									
		500									
		550									
	600										

3) Only in tracfix units

Note: The maximum width of the outer panels in tracfix systems with vertical panel joints is 35 cm

 = vertical panel joints

(panel width approx. 120 cm)

 = seamless

 = horizontal panel joint(s)

 = not available

AH = unit height

1) = optional

dimensions in cm

transolair Fabric pattern 338..
Fabric width 250 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		243									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

perfortex Fabric pattern 331.. / 332..
Fabric width 120 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		250									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

vuscreen Alu Fabric pattern 317..
Fabric width 252 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		243									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

glass fibre screen Serge 600 not available Fabric pattern 272..
Fabric width 250 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		250									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

Note: The maximum width of the outer panels in tracfix systems with vertical panel joints is 35 cm

= vertical panel joints

(panel width approx. 120 cm)

= seamless

= horizontal panel joint(s)

= not available

AH = unit height

1) = optional

dimensions in cm

Soltis Veozip (not available) Fabric pattern 511..
Fabric width 290 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		200									
		250									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

Soltis Perform 92 Fabric pattern. 92-..
Fabric width 177 cm

		Awning fixture width									
		150	200	250	300	350	400	450	500	550	600
AH	tracfix 1)	150									
		180									
		250									
		300									
		350									
		400									
		450									
		500									
		550									
		600									

Note: The maximum width of the outer panels in tracfix systems with vertical panel joints is 35 cm

= vertical panel joints
(panel width approx. 120 cm)

= seamless

= horizontal panel joint(s)

= not available

AH = unit height

1) = optional

dimensions in cm

Awning cover	fabric pattern no.	standard	optional
sunvas	300..–315..	✓	—
sunsilk	324.. / 328.. / 369..	✓	—
sunbow	411..–427..	✓	—
smart art	340..	—	✓
perla FR	371.. / 372..	—	✓
perfortex	331.. / 332..	✓	—
transolair	338..	—	✓
transolair (120 cm)	339..	—	✓
vuscreen Alu	317..	—	✓
Soltis Perform 92	92-..	—	✓

shadeplus / drop valance cover ¹⁾	fabric pattern no.	standard	optional	Awning fixture width	height	tailored cloth
sunvas	309.. / 310.. / 311..	✓	—	≤ 500	210	QN
sunsilk	324..	✓	—	≤ 500	210	QN
sunbow	411.. / 414.. / 421.. / 424..	✓	—	≤ 500	210	QN
transolair	338..	—	✓	≤ 500	210	N
transolair (120 cm)	339..	—	✓	≤ 500	210	QN
vuscreen Alu	317..	—	✓	≤ 500	150	N
Soltis Perform 92	92-..	—	✓	≤ 500	210	QN
glass fibre screen Serge 600	272..	—	✓	≤ 500	190	N
perfortex	331.. / 332..	—	—			
perla FR	371.. / 372..	—	—			


1) Shadeplus cover is narrower than the awning cover

N = seamless

QN = horizontal seam(s)

Only available in plain seamless fabrics (oversized, fabric width > 120 cm) or in plains with a horizontal joint (fabric width 120 cm)

Lighting options

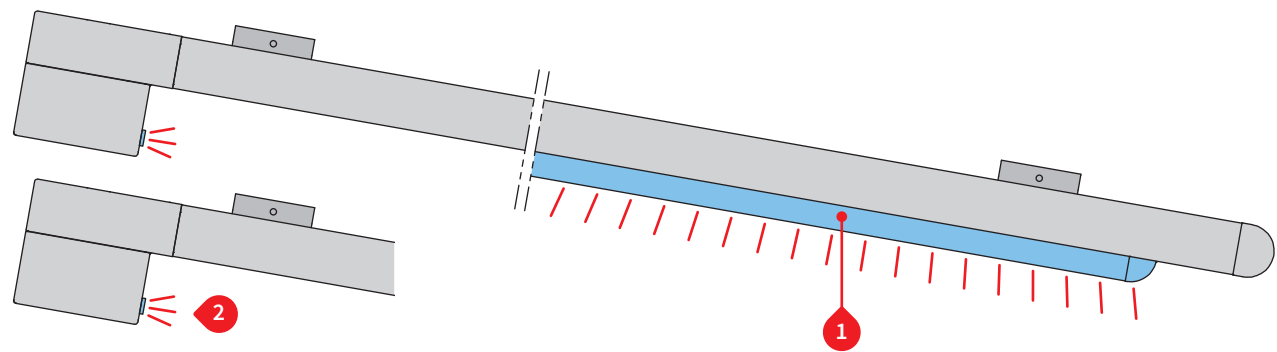

Lighting options

- 1 LED Line RGB-WW attached to the guide tracks
- 2 LED Line RGB-WW in the cassette

For combination possibilities please view section “Dimension overview lighting options”

Controls















	standard	optional
radio-controlled dimmer io 868 MHz	✓	—
zigbee	—	✓

2 and 3 LED-Line in the guide rails and in the cassette


Technical specification

operating voltage	230 V, 50 Hz
power output per metre	11 W / m
light source	LED (24 V)
number of LEDs	144 units / m
number of transformers	1 unit
light temperature	RGB colour light change and warm white
IP protection class	IP 44
service life	approx. 15.000 h

Fixtures, fittings and accessories

 flat track bracket fixture type 10 and 15 78548.	 double track bracket plat 2 single units 73627.	 additional angled bracket for the bearing, gearbox and motor sides 50 × 50 × 80 mm fixture type 15 78719.
 accessories for two angled brackets 78719. 787211	 track bracket, with adjustable head 80 mm fixture type 20 73624.	 double track bracket with adjustable head 80 mm central bracket for 2 single units next to each other 73631.
 windmill track bracket 80 mm 73629.	 track bracket, with adjustable head 100 mm 76046.	 double track bracket with adjustable head 100 mm central bracket for 2 single units next to each other 73634.
 windmill track bracket 100 mm 76054.	 track bracket with offset footplate 100 mm 76199.	 track bracket, with adjustable head 140 mm 76048.
 double track bracket with adjustable head 140 mm central bracket for 2 single units next to each other 73636.	 covering cap for square track bracket standard accessory for bracket 2 × 76718.	


Fixtures, fittings and accessories



sprung bracket with stainless steel cover support wire

included with the delivery


73639. and 771401.



universal track bracket with adjustable head

140–500 mm


76053.



spacer plate for track bracket

110 × 40 × 10 mm


78570.



adapter plate for track bracket

110 × 60 × 10 mm


78158.



adapter plate for track bracket

110 × 60 × 10 mm

78165.



spacer plate double track bracket flat


80 × 40 × 15 mm

73742.

Fixture types


10

Clearance 20 mm

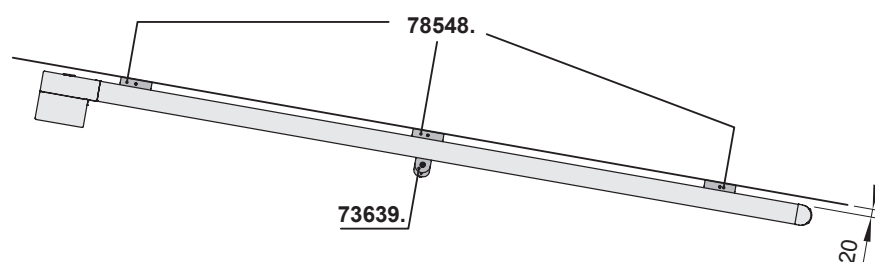


15

By angled bracket
to the side

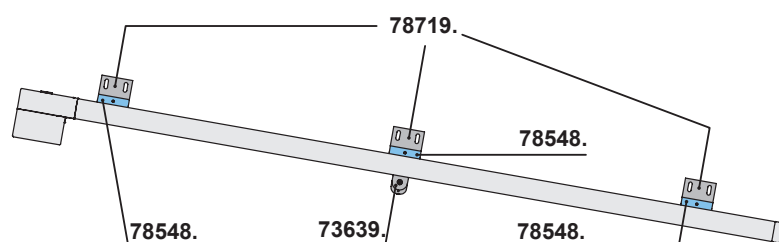


20

Clearance 85 mm

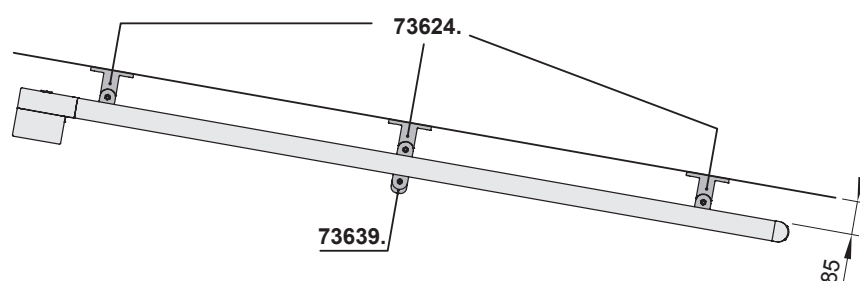


21

Clearance 105 mm

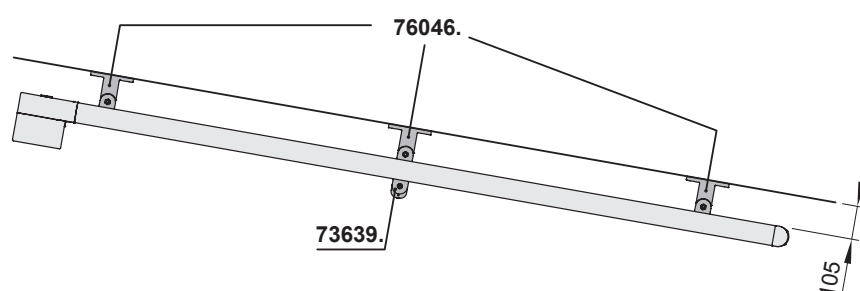

22

Clearance 145 mm

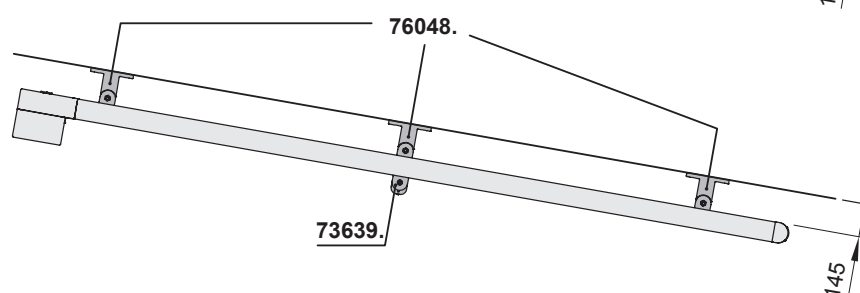

Individual bracket selection:

See "Fixtures, fittings and accessories".

Awning extension > 300 cm, always 3 brackets per guide track.

During extension and retraction the cover may sag.


Cover support wires and bracket (73639.) are only supplied with the markilux 779 without tracfix.

A bracket should always be placed where these are positioned.

dimensions in mm

Fixture types

Overview of dimensions

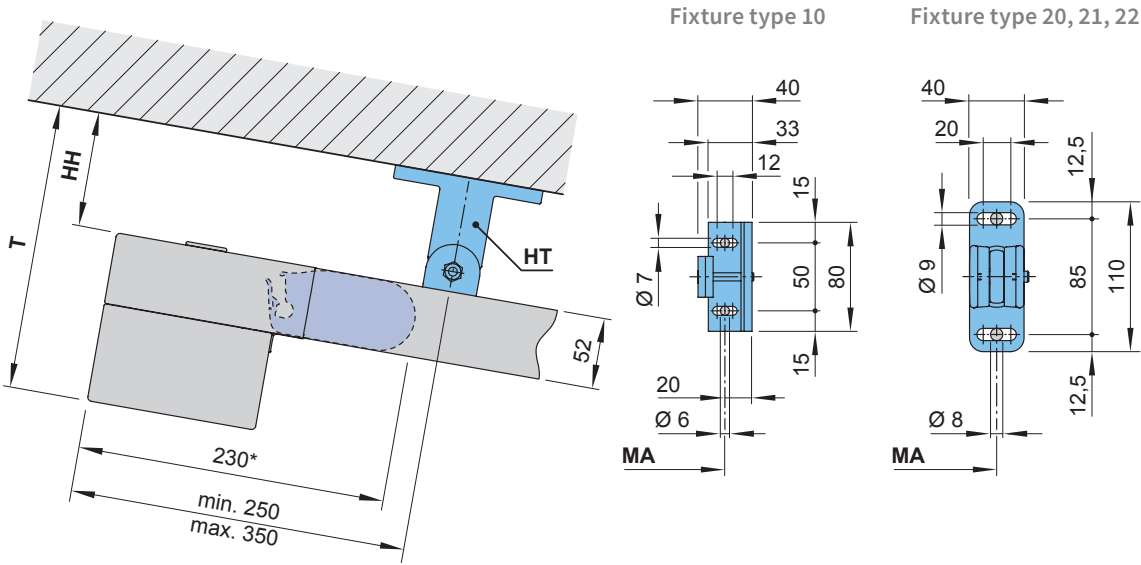


	Fixture type 10	Fixture type 20	Fixture type 21	Fixture type 22
HT = bracket	78548.	73624.	76046.	76048.
HH = bracket height	20	85	105	145
T = depth	150	215	235	275
MA = order dimension				
* = extension when retracted				

dimensions in mm

Overview of dimensions

Single unit

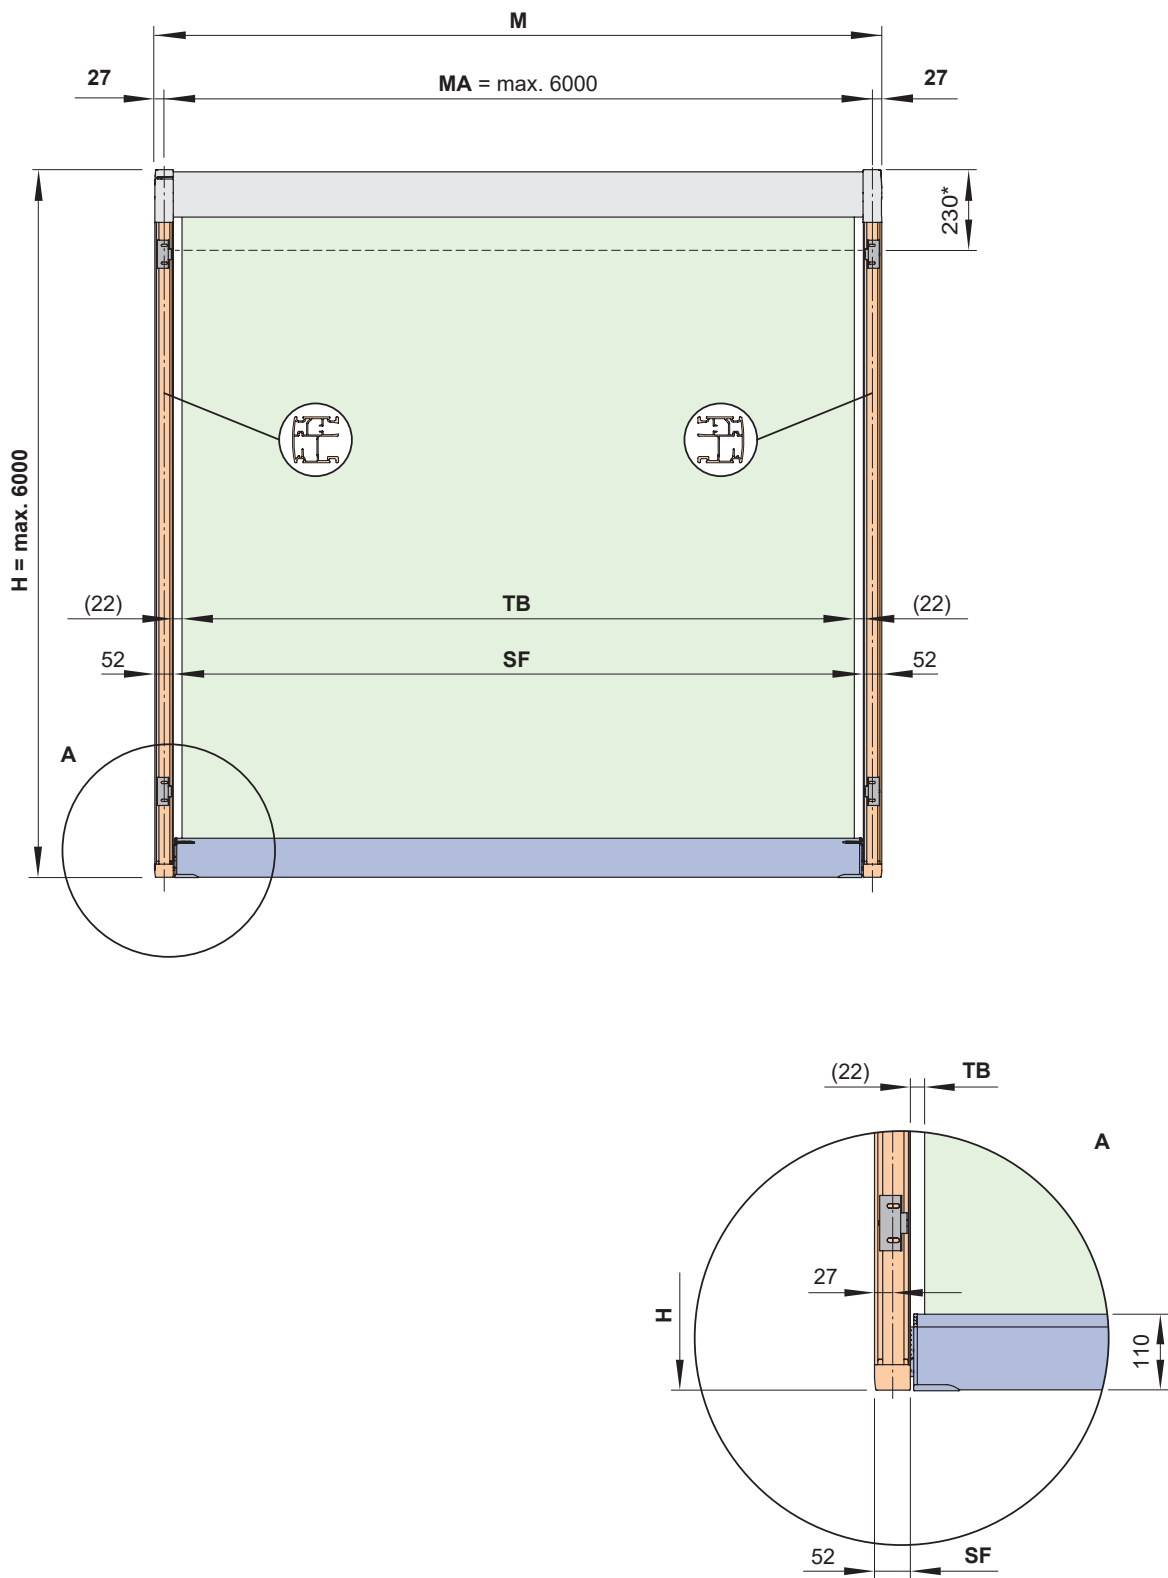


- * = extension when retracted
- (...) = gap between cover and guide track (non-tracfix units)
- H = **order dimension** = extension
- M = awning width
- MA = **order dimension**= awning fixture width = fixture width
- SF = visible cover (in tracfix systems)
- TB = cover width (in non-tracfix systems)

dimensions in mm

Overview of dimensions


Two single units – fixture via double track brackets

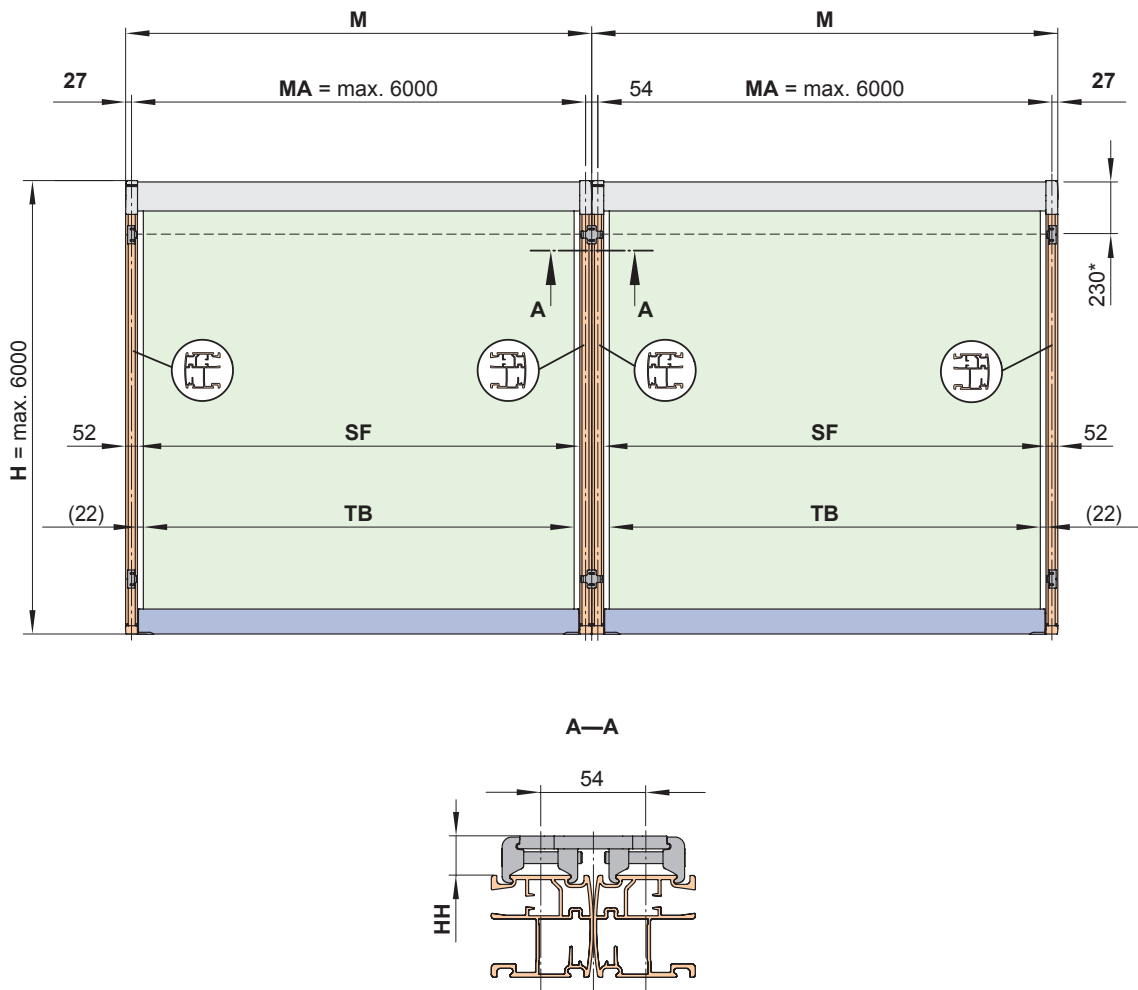

- * = extension when retracted
- (...) = gap between cover and guide track (non-tracfix units)
- H = **order dimension** = extension
- HH = bracket height
- M = awning width
- MA = **order dimension** = blind fixture width = fixture width
- SF = visible cover (in tracfix systems)
- TB = cover width (in non-tracfix systems)

dimensions in mm


Dimension overview fixture combination 10

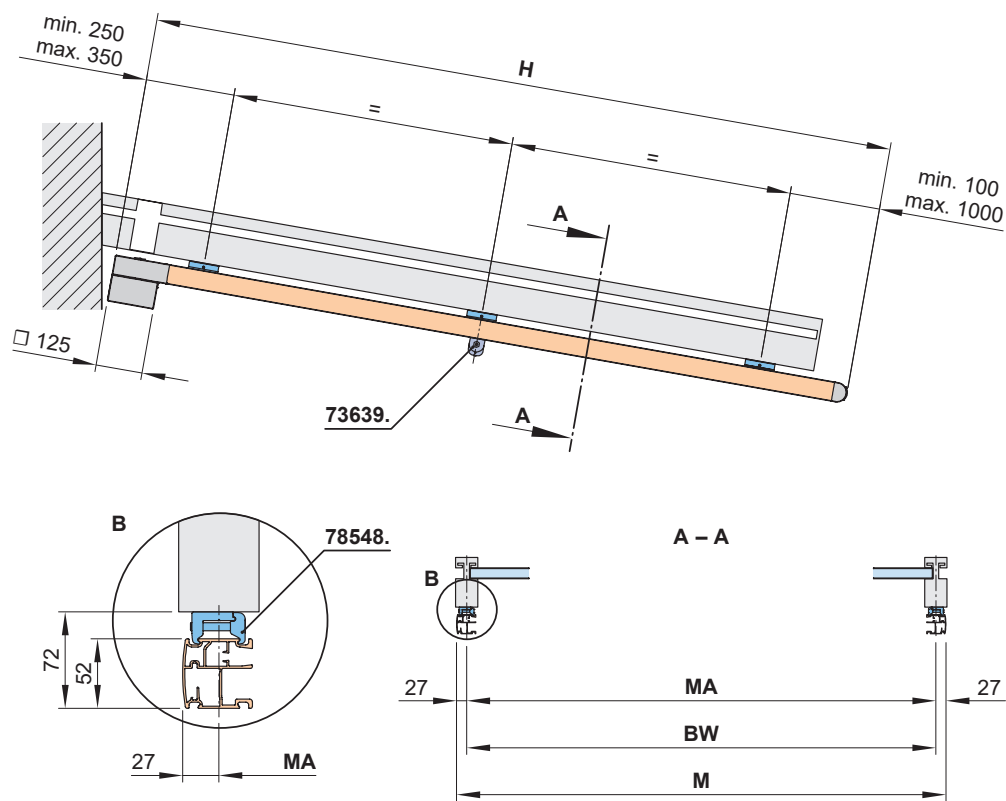

- BW = width between fixture points on the conservatory
- H = **order dimension** = extension
- M = awning width
- MA = **order dimension** = blind fixture width = fixture width

dimensions in mm


Dimension overview fixture combination 15

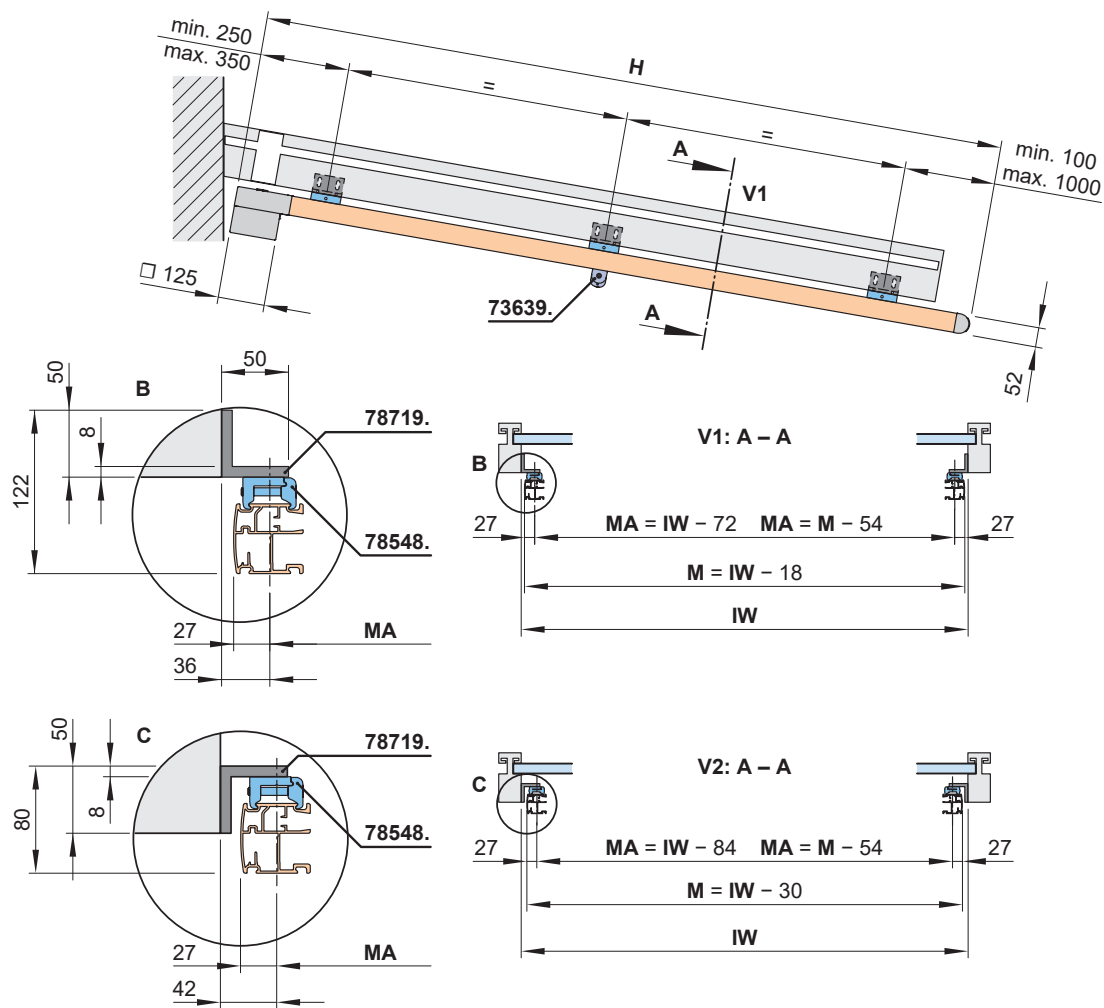

- H** = order dimension = extension
IW = interior conservatory dimension
M = awning width
MA = order dimension = blind fixture width = fixture width
V1, V2 = variants

dimensions in mm

Dimension overview fixture types 20, 21, 22

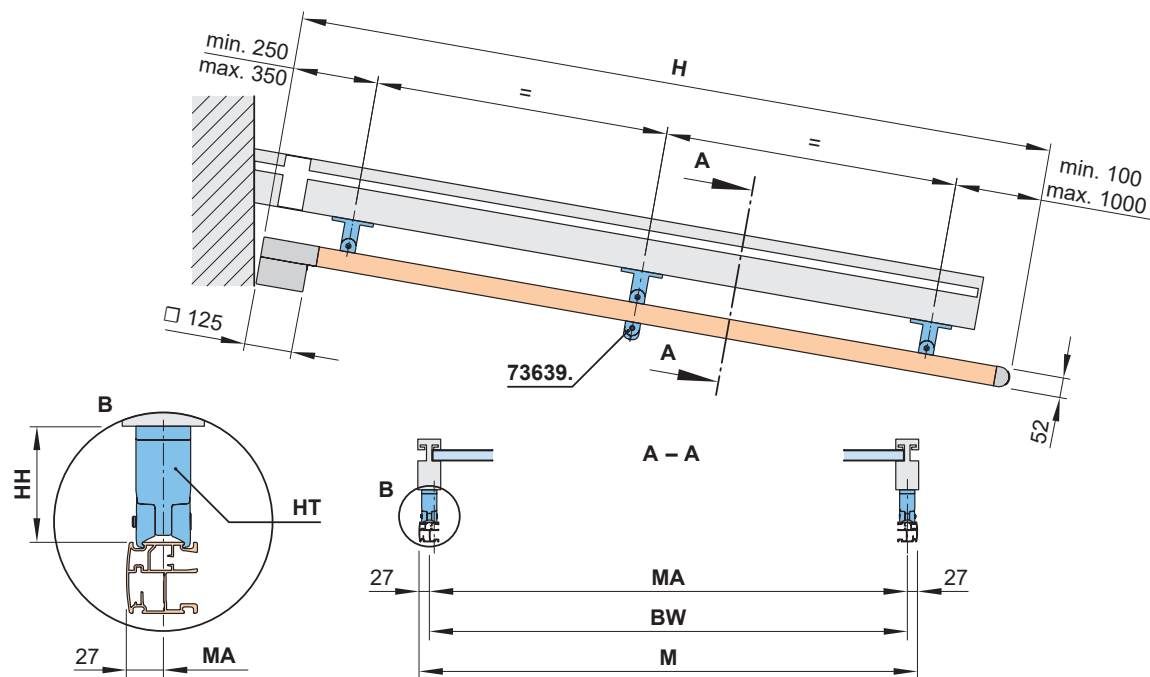


- BW = width between fixture points on the conservatory
- H = **order dimension** = extension
- HH = bracket height (see for fixture types 10, 20, 21 und 22)
- HT = bracket
- M = awning width
- MA = **order dimension** = blind fixture width = fixture width

dimensions in mm

Dimension overview, shadeplus


Magnetic gearbox operation

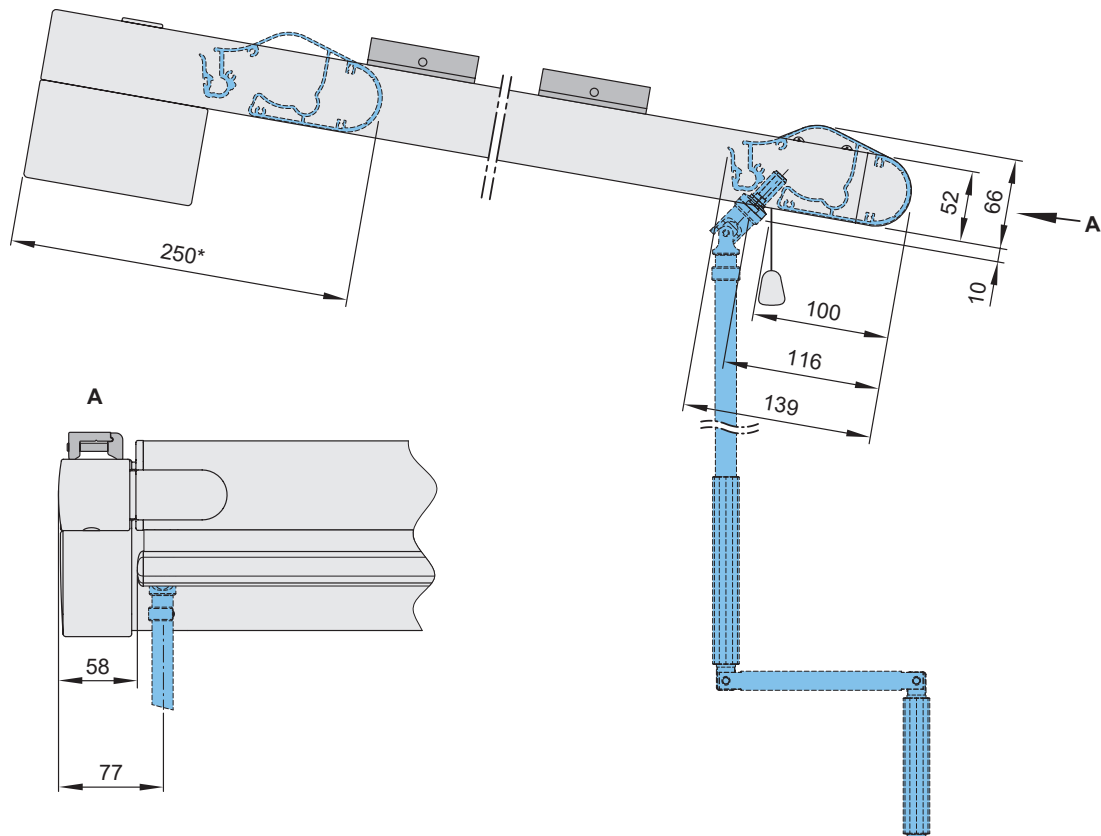


* = extension when retracted

dimensions in mm

Gearbox crank handle position

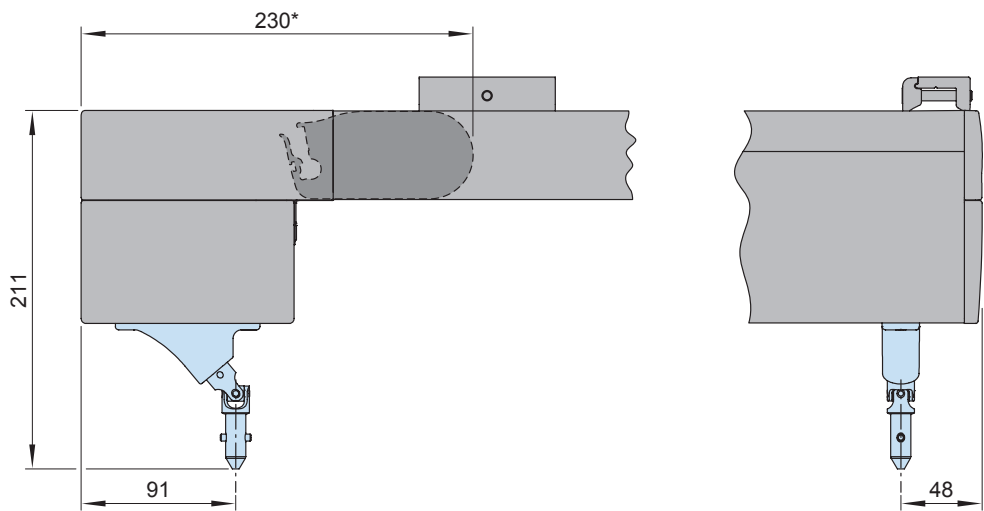

Motor cable exit point

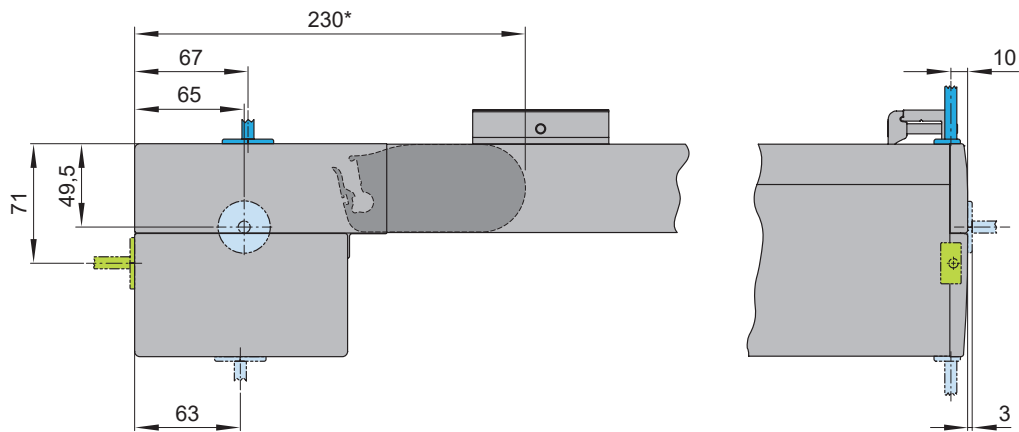


- * = extension when retracted
- = standard
- = optional
- = optionally with surcharge


dimensions in mm

Dimension overview with the various lighting options

Option 1: LED Line RGB-WW in the guide tracks, electronic components in an E box

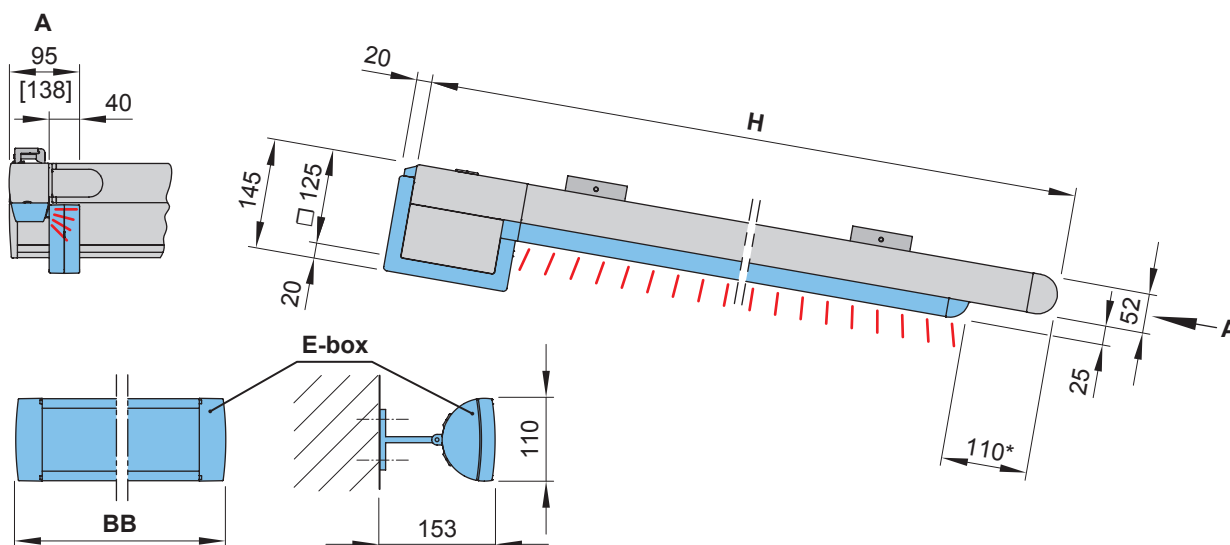

Option 1a (from an extension 401 cm): LED Line RGB-WW in the guide tracks, stainless steel cover support wires, electronic components in an E box

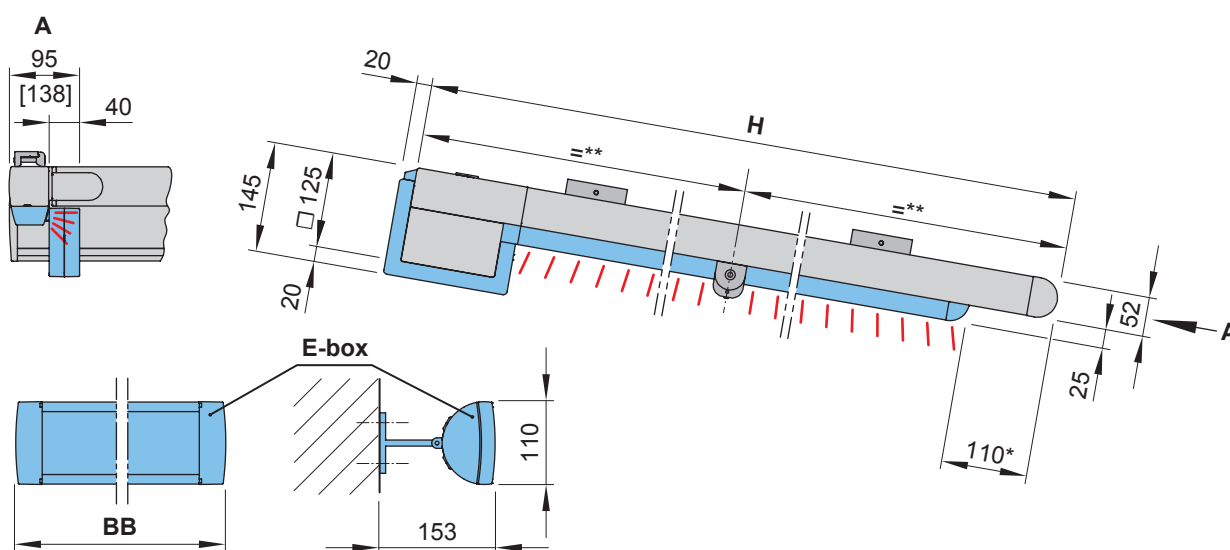

* = 110 mm standard, 36 mm optional

** = cover support wire centred (standard), other positions are possible on request

[...] = for shadeplus and lighting

BB = order width


E-box = see "E-box"

H = order dimension = extension

dimensions in mm

Dimension overview with the various lighting options

Option 2: LED-Line RGB-WW in the cassette (can be combined at will with options 1–1a), electronic components in an E box

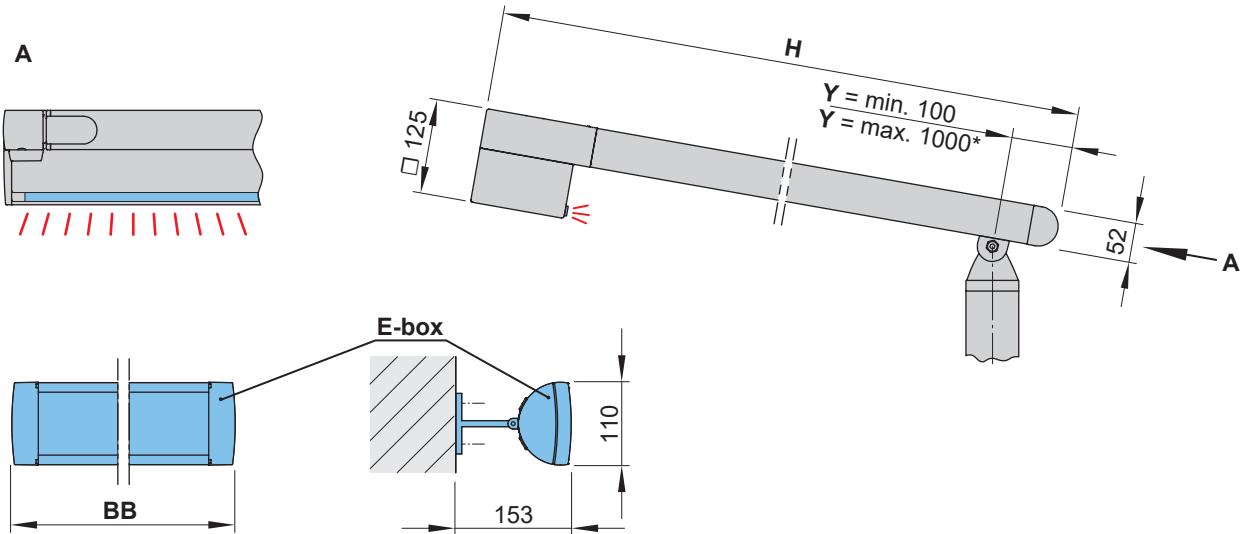


- BB** = order width
- E-box** = see "E-box"
- H** = **order dimension** = extension
- Y** = **order dimension** = post moved back by min. 100 mm, mx. 1000 mm (standard)

dimensions in mm

E-box

Overview of dimensions

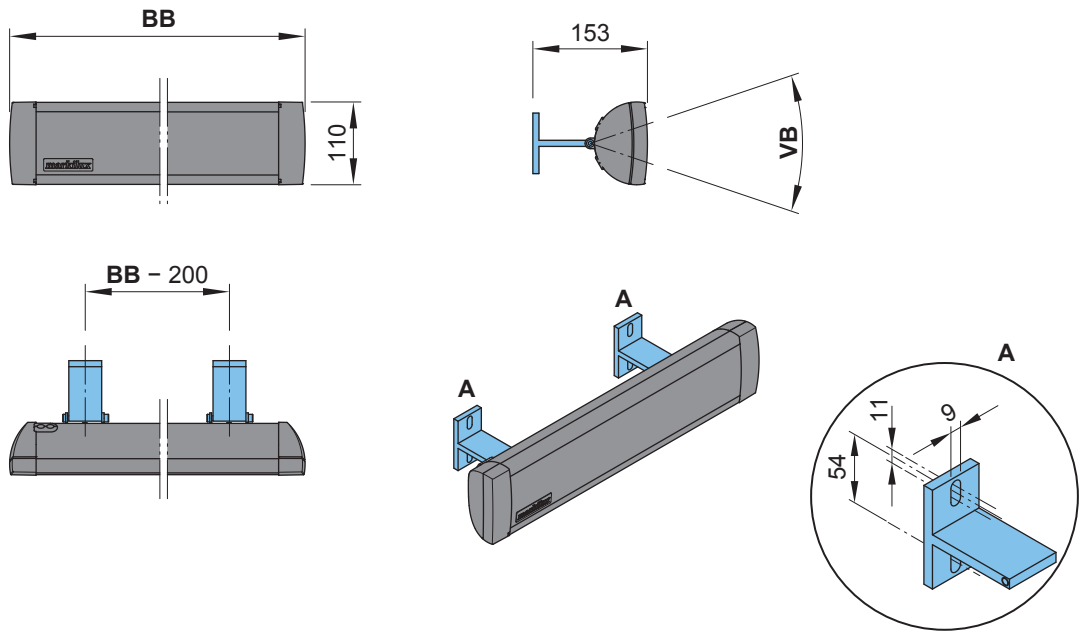

Dimension overview and applications

Wireless technology
Extension H [cm]

868 MHz io / Zigbee

< 330 cm

≥ 330 cm

Lighting options

LED-Line RGB-WW in the guide tracks
with or without cover
support wire

LED-Line RGB-WW recessed into the cassette

LED-Line RGB-WW below the guide tracks
or LED-Line RGB-WW recessed into the cassette

E-box **M**
71850.
BB = **500** mm

for independent use


E-box **I**
71851.
BB = **to order**

BB = order width
VB = adjustment range

dimensions in mm

Dimensions for taking measurements

Awning without lighting

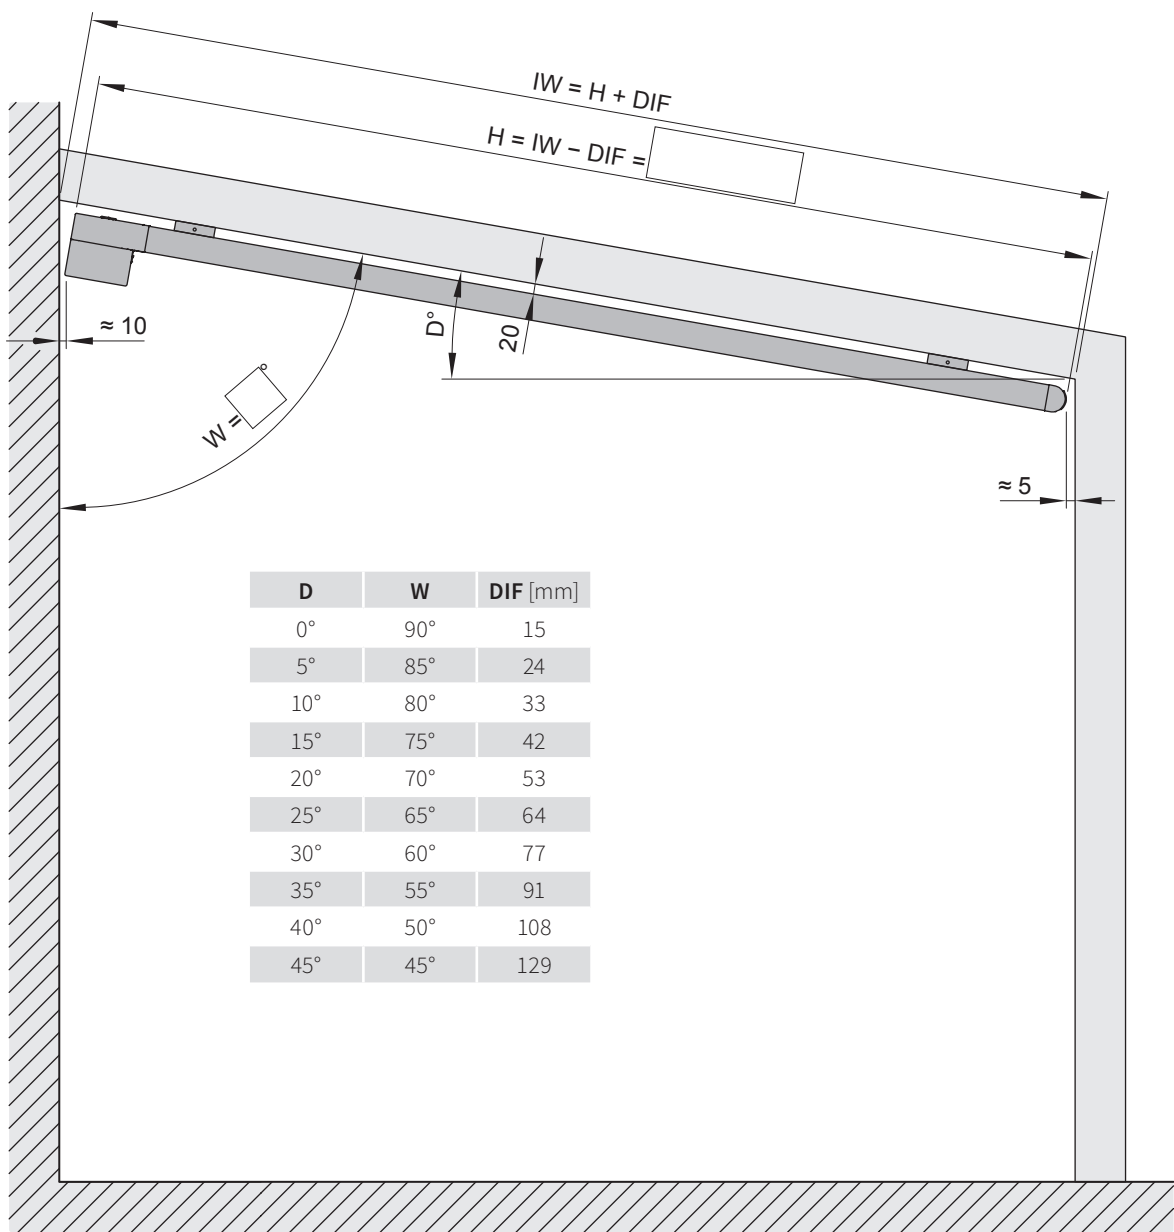


Orders are to be submitted with all the dimensions shown in the diagram!

- D = roof pitch (in °)
- DIF = difference interior conservatory measurement to extension H
- H = **order dimension** = nominal extension = $IW - DIF$ (see table)
- IW = interior conservatory dimension
- W = awning pitch (in °)

dimensions in mm

Dimensions for taking measurements

Awning with lighting

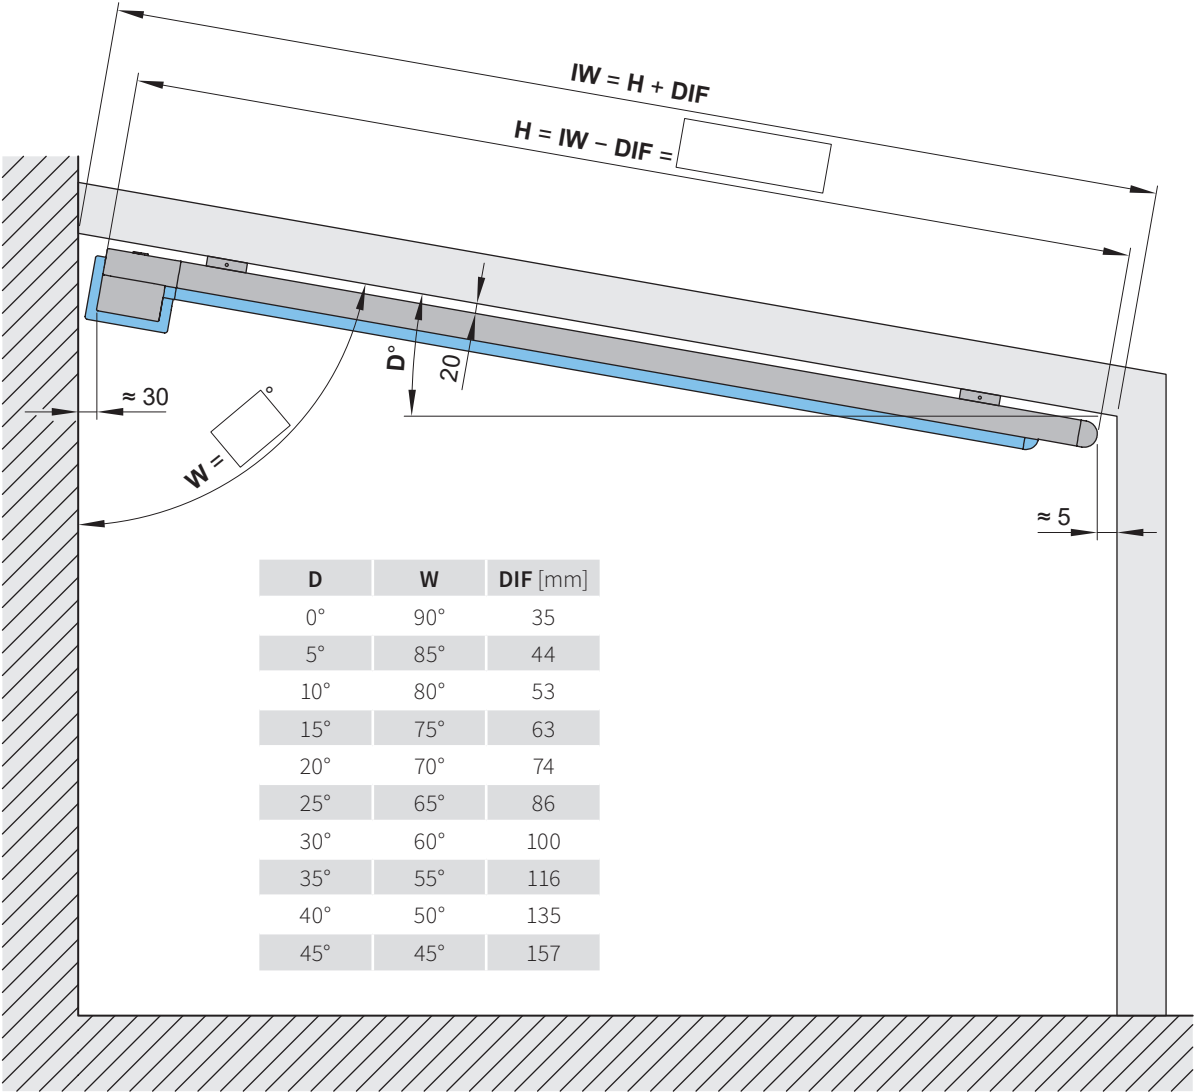

Orders are to be submitted with all the dimensions shown in the diagram!

- D** = roof pitch (in °)
- DIF** = difference interior conservatory measurement to extension H
- H** = **order dimension** = nominal extension = $IW - DIF$ (see table)
- IW** = interior conservatory dimension
- W** = awning pitch (in °)

dimensions in mm