



Above glass awning

markilux 8800 / 8800 tracfix

Modern, timeless design and technology thought through to the very last detail – the extremely reliable shading solution for large areas.





German
Design Award
NOMINEE

markilux.com


markilux
safe timeless beautiful

Product Characteristics


Wind resistance class 3
Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph

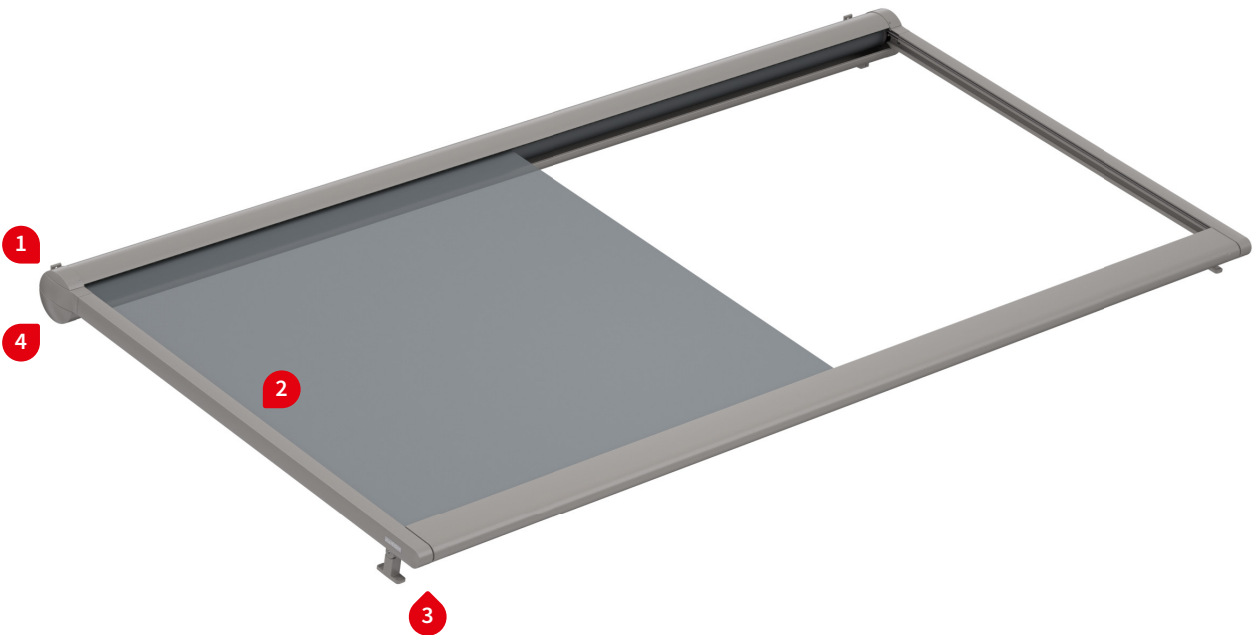


1 bottom fixture



1 face fixture

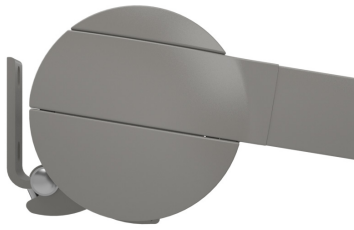


2 tracfix cover guidance – no gap between cover and track ¹⁾

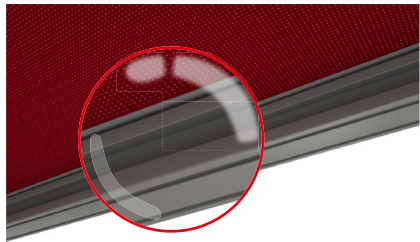


3 when extended, the front profile finishes flush with the end of the guide tracks



3 coupling track

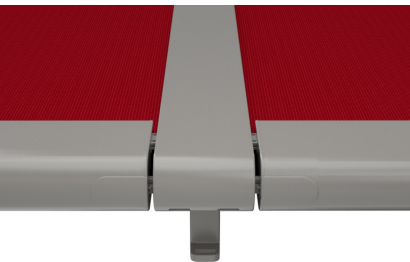

4 maintenance opening in the cassette

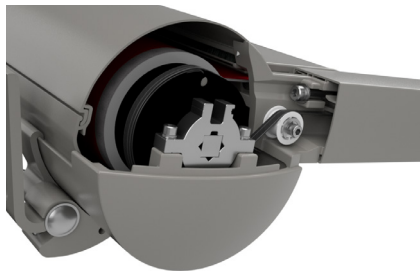

4 awning retracted, all round cover protection



1) Optional accessories

Product Characteristics

Description

- exterior awning for conservatories, glass canopies and large skylights
- the ingenious tensioning system and the sturdy design allow areas of up to 36 m² to be shaded by one awning (with tracfix system 30 m²) – up to 5 awnings can be coupled together

Special features

- fully encompassing cassette that protects the cover perfectly
- the awning cover is bonded with stabilising vertical panel joints – in the case of the series sunvas, sunsilk, sunbow and perla FR the standard panel width is 60 cm (perfortex 120 cm / Soltis Perform 92 88,5 cm / transolair 84 cm) – in order to achieve the optimum overall cover tension and stability
- tracfix optional: the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- option of a silentec motor – motor noise is appreciably reduced
- tried-and-tested tensioning system with drive belts and integrated gas pistons – delivers optimum cover tension – in any phase of extension
- the broad range of brackets with patented clip-on system offers individual fixture solutions

Dimensions

- single unit: 60–700 cm in width, maximum extension 700 cm (depending on the width)
- maximum dimensions, width × extension: 500 × 700 cm / 550 × 650 cm / 600 × 600 cm / 650 × 500 cm / 700 × 450 cm (without tracfix system)
- maximum dimensions, width × extension: 500 × 600 cm / 550 × 500 cm / 600 × 450 cm (with tracfix system)
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 95 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of die-cast aluminium

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, round, Ø 187 mm
- guide tracks angular, width × height 60 mm × 70 mm (coupled unit 116 × 70 mm)
- front profile rounded at the front, depth × height 150 mm × 70 mm

End caps

- in order to achieve the optimum overall cover tension and stability
- the top maintenance cover is made of high-quality plastic, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- cassette brackets: bottom fixture, face fixture, top fixture
- brackets for the guide tracks: stand-off brackets for bottom fixture, lateral fixture, reveal fixture
- standard bracket heights: 100 mm / 140 mm / 100–500 mm (bespoke heights can be ordered)
- track-only fixture of the awning is possible up to a fixture width of 600 cm without any housing support
- other accessories are available

Frame colours

markilux frame colours without surcharge

traffic white, RAL 9016



metallic aluminium, RAL 9006



grey brown, similar to RAL 8019



off-white textured finish, 5233 ¹⁾



stone grey metallic, 5215 ¹⁾



anthracite metallic, 5204 ¹⁾



havana brown textured finish, 5229 ¹⁾



Non-standard powder-coated finish

Bespoke frame colours incur a surcharge – matt, metallic, finely textured and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

Colours may differ slightly from those depicted in both hue and finish.

¹⁾ textured finish

Dimensions and configuration options

Single unit

Order dimensions	Awning fixture width												Minimum fixture width	
	150	200	250	300	350	400	450	500	550	600	650 ¹⁾	700 ¹⁾	Hardwired motor	Radio-controlled motor
	60 150	151 200	201 250	251 300	301 350	351 400	401 450	451 500	501 550	551 600	601 650	651 700		
Overall width	+ 10												60 [73]	70 [83]
H	150													
	200													
	250													
	300													
	350													
	400 ²⁾		
	450 ²⁾		
	500 ²⁾		
	550 ²⁾	—		
	600 ²⁾	—		
	650 ²⁾	—	—		
	700 ²⁾	—	—	—	—		

Dimensions in cm

1) = depending on the fixture combination, an additional central cassette support is required from a fixture width of 601 cm and a central support for any cover support tube from a fixture width of 451 cm

2) = from an extension of 401 cm an additional track bracket per track is required

• = 1 cover support tube, if unit is without tracfix

.. = 2 cover support tubes, if unit is without tracfix

[...] = dimensions in the case of tracfix units

H = projection

 = tracfix (optional)

 = tracfix not available

Operation

	standard	optional
crank handle	—	—
hard-wired motor	✓	—
silentec motor (optionally with an external io receiver)	—	✓
radio-controlled motor io, 868MHz	—	✓
radio-controlled motor RTS, 433MHz	—	✓

Coupled awnings

2–5 fields, 1 motor per field
alternatively 2 fields 1 motor / 3 fields 2 motors / 4 fields 2 motors
maximum size per field: see “single unit” dimensions

General notes

Different field extensions are available in a coupled awning. The rolling up behaviour of the covers may vary in coupled awnings that have different field sizes. This does not effect the functionality of the awning or shorten the service life of the covers.

Awning cover	fabric pattern no.	standard	optional
sunvas ^{1) 6)}	300..–315..	✓	—
sunsilk ^{1) 6)}	324.. / 328.. / 369..	✓	—
sunbow ^{1) 6)}	411..–427..	✓	—
smart art ¹⁾	340..	—	✓
perla FR ^{1) 5)}	371.. / 372..	—	✓
perfortex ²⁾	331.. / 332..	✓	—
transolair ³⁾	338..	—	✓
transolair (120 cm) ¹⁾	339..	—	✓
Soltis Perform 92 ⁴⁾	92–..	—	✓

Standard fabric panel widths

1) 60 cm 2) 120 cm 3) 84 cm

4) 88,5 cm 5) Only in tracfix units

6) In the case of striped patterns, a symmetrical pattern repeat at every second seam is not possible.

Shadeplus

not available

Optional accessories

tracfix – cover guidance system holding the cover neatly in the guide rails

storm safety clip for the cassette

wall sealing profile

several motors in a coupled awning, can be operated independently

automatic controls (light, wind, rain)

N.B. Important background information can be found in the chapter “Optional Accessories”

Dimensions and configuration options

Coupled unit, 2 fields ⁴⁾

		Awning fixture width									
		500 ³⁾	600 ³⁾	700 ³⁾	800	900	1000	1100	1200	1300	1400
Order dimensions		401	501	601	701	801	901	1001	1101	1201	1301
		500	600	700	800	900	1000	1100	1200	1300	1400
Overall width		+ 10									
H	150										
	200										
	250										
	300										
	350										
	400
	450
	500	—
	550	—	—
	600	—	—
	650	—	—	—
	700	—	—	—	—

Coupled unit, 3 fields ⁴⁾

		Awning fixture width															
		600 ³⁾	700 ³⁾	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
Order dimensions		551	601	701	801	901	1001	1101	1201	1301	1401	1501	1601	1701	1801	1901	2001
		600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
Overall width		+ 10															
H	150																
	200																
	250																
	300																
	350																
	400
	450
	500 ²⁾	—
	550	—	—	—
	600	—	—	—
	650 ¹⁾	—	—	—	—
	700	—	—	—	—	—	—

1) = maximum fixture width of 1650 cm

2) = maximum fixture width of 1950 cm

3) = the cassette will be supplied in one piece as standard. If, for transportation or installation reasons, the cassette needs to be split, please note this explicitly when ordering.

4) = maximum field dimensions: see dimension overview for a single unit

• = 1 cover support tube, if unit is without tracfix

•• = 2 cover support tubes, if unit is without tracfix

H = **order dimension** = extension


 = tracfix (optional)

 = tracfix not available

dimensions in cm

Fixtures, fittings and accessories


Bottom fixture brackets, cassette



bottom fixture cassette bracket
for mounting on frame

left


76061.



bottom fixture cassette bracket
for mounting on frame


right

76062.



cassette coupling bracket
for the cassette bottom fixture


76180.



cassette bracket
for bottom reveal fixture

left


76077.



cassette bracket
for bottom reveal fixture

right


76078.



cassette support for
track-only fixture


100 mm

76183.



cassette support for
track-only fixture
140 mm

76184.



cassette coupling bracket
for track-only fixture,
rigid

fixture type 31 and 32


76069.



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°

76067.


left



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°

76068.


right



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°
for coupling point
bottom fixture

76198.


Cassette fixture bracket face/top



face fixture cassette bracket, left

pitch adjustment
range 5°—45°


76063.



face fixture cassette bracket, right

pitch adjustment
range 5°—45°


76064.



coupling cassette bracket, central

pitch adjustment
range 5°—45°


76181.



face fixture cassette bracket, wide, left

pitch adjustment
range 5°—45°

76231.



face fixture cassette bracket, wide, right

pitch adjustment
range 5°—45°

76232.




top fixture cassette bracket right / left

pitch adjustment
range 5°—20°

77058.

Fixtures, fittings and accessories


Track bracket



track bracket, with adjustable head

100 mm


76046.



windmill track bracket

100 mm


76054.



track bracket with offset footplate

100 mm


76199.



double track bracket with adjustable head

100 mm

76191.



track bracket for track-only fixture, rigid

100 mm


76017.



track bracket for track-only fixture, rigid by the metre, undrilled, 100 mm

maximum length 6 mm


76013.



track bracket, with adjustable head

140 mm


76048.



double track bracket with adjustable head

140 mm

76192.



track bracket for conservatory transom fixture

100 mm

76055.



track bracket, with adjustable head

140–500 mm

76047.



track bracket, with adjustable head and foot

200–500 mm


76045.



universal track bracket with adjustable head

140–500 mm

76053.



double track bracket with adjustable head

140–500 mm


76193.



double track bracket with adjustable head and foot


200–500 mm

76194.




vario-V bracket for track fixture

76052.



covering cap for square track bracket
standard accessory for bracket

2 x 76718.

















flat track bracket with adjustable head
for lateral guide track fixture

76049.

Fixtures, fittings and accessories


Accessories

 <p>angled mounting bracket</p> <p>76098.</p>	 <p>angled mounting bracket 76098. including coupling bolts</p> <p>76099.</p>	 <p>adapter plate for track bracket 110 × 60 × 10 mm</p> <p>78158.</p>
 <p>adapter plate for track bracket 110 × 60 × 10 mm</p> <p>78165.</p>	 <p>spacer plate for track bracket 110 × 40 × 10 mm</p> <p>78570.</p>	 <p>track bracket accessory width 14 mm for direct assembly on conservatory rafters</p> <p>76804.</p>
 <p>track bracket accessory width 25 mm for direct assembly on conservatory rafters</p> <p>76805.</p>	 <p>fixture bracket for light and / or wind and / or rain sensor</p> <p>76050.</p>	 <p>bracket for sun and/or wind sensor io</p> <p>76723.</p>
 <p>angled bracket to prevent deflection of the cover support tube for bracket height 100 mm</p> <p>76065.</p>	 <p>storm safety clip</p> <p>76235.</p>	 <p>storm safety bracket for the cassette (recommended in windy locations and as an additional safety measure for the cassette)</p> <p>76197.</p>
 <p>diagonal tensioning kit 4 wire tensioners, 1 tensioning wire (stainless steel)</p> <p>71790.</p>	 <p>support bracket to prevent deflection of the cover support tube can be shortened to between 70–320 mm (with clamp plate)</p> <p>71780.</p>	


Fixture types

Bottom fixture

11

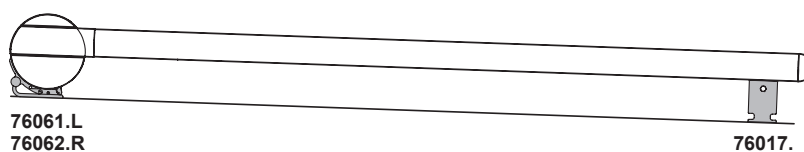

14

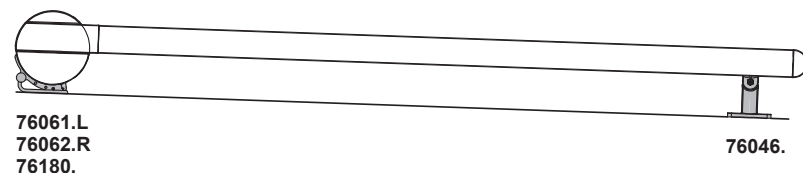


21



13


61

Up to an extension
of 400 cm

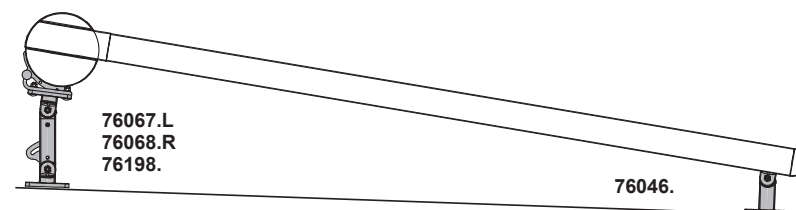

81

From an extension
of 401 cm

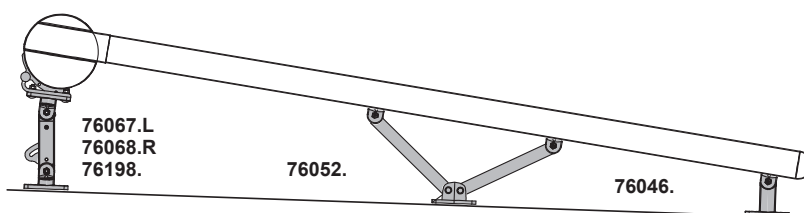

Individual bracket selection:

See "Fixtures, fittings and accessories".

Bottom fixture

Awning extension > 400 cm, always 2 brackets per guide track.

In the case of widths > 600 cm an additional central cassette bracket or cassette support is required.


Fixture types

Track-only fixture

31




32

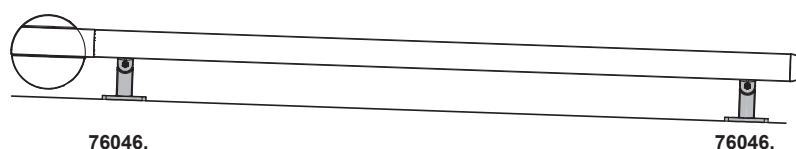

Face fixture


12

Up to an extension
of 400 cm

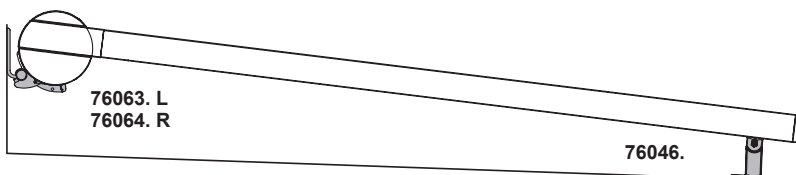


51

From an extension
of 400 cm

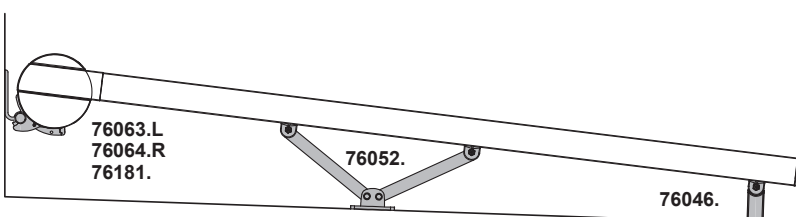

22

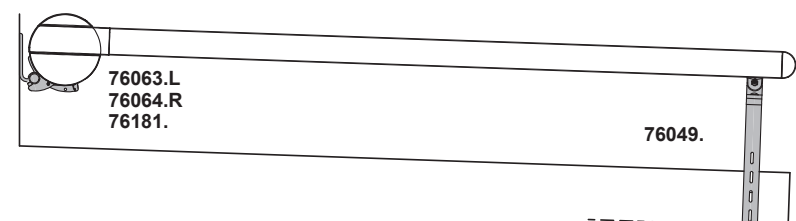

Individual bracket selection:

see "Fixtures, fittings and accessories".

Track-only fixture

Not recommended with a coupled awning.

In the case of raised brackets > 140 mm, always 3 brackets per guide track, regardless of the extension.

In the case of widths > 600 cm an additional central cassette bracket or cassette support is required.

Face fixture


Awning extension > 400 cm, always 2 brackets per guide track.

In the case of widths > 600 cm an additional central cassette bracket is required.


Overview of dimensions

Single unit 1 field, 1 motor

Guide track variant, asymmetrical lengths

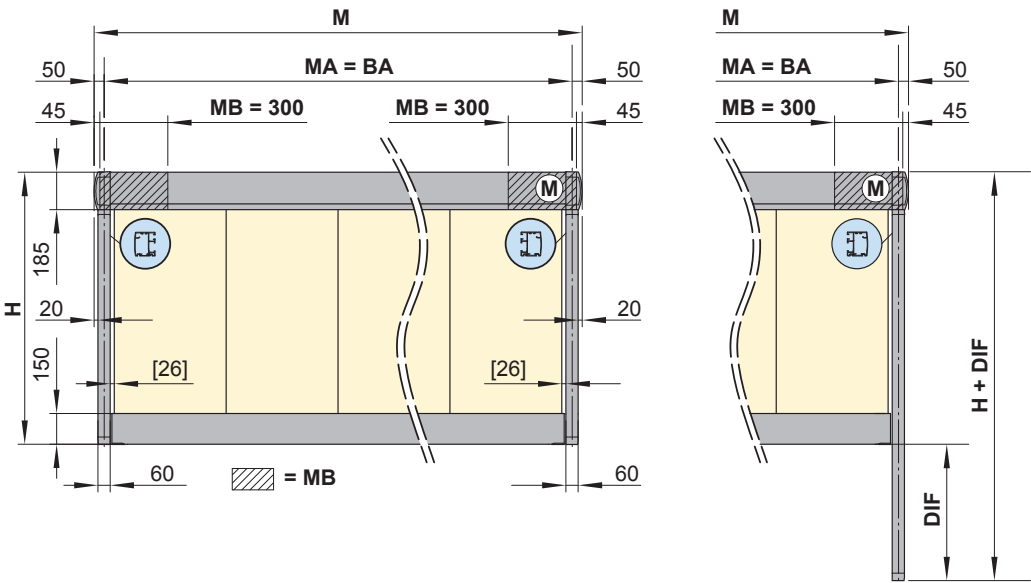

Coupled unit, 2 fields, 1 motor

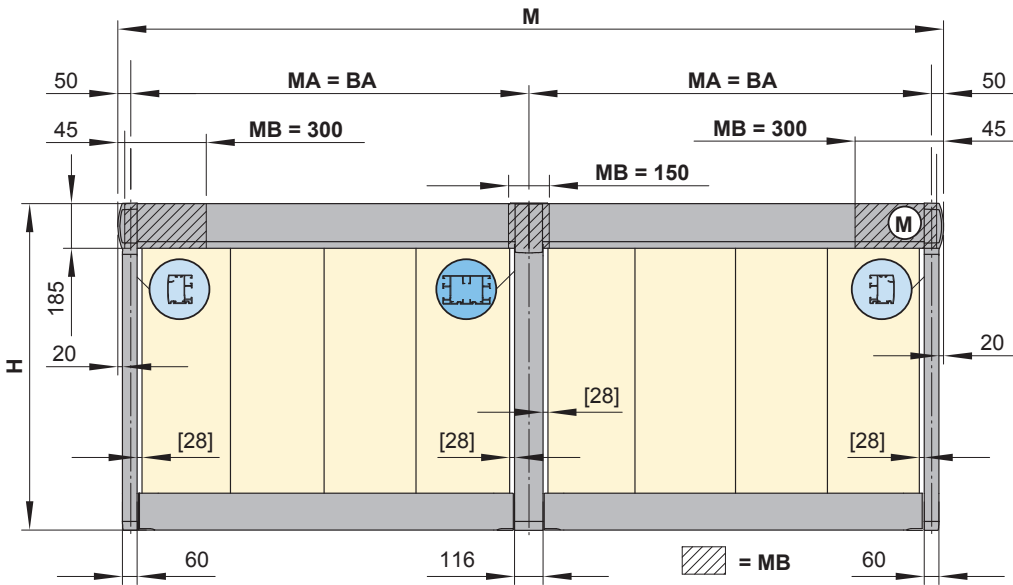


- [...] = dimensions of the cover gap in a standard unit, no cover gap in units with tracfix system
- BA = width between fixture points
- DIF = difference in measurement
- H = **order dimension** = projection

- M = overall blind width = **MA** + 100 mm
- MA = **order dimension** = awning fixture width = fixture width
- MB = bracket fixture range
- (M) = motor


dimensions in mm

Overview of dimensions

Coupled unit, 2 fields, 2 motors

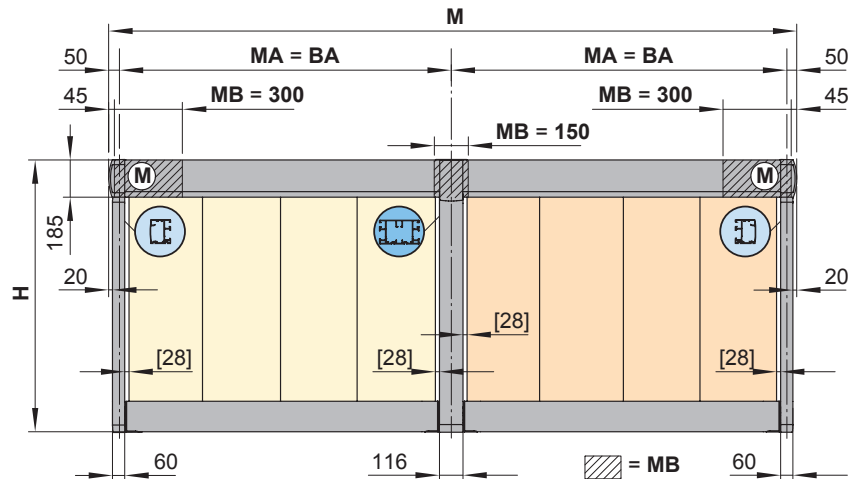

Coupled unit, 2 fields, 2 motors, asymmetrical guide track extensions

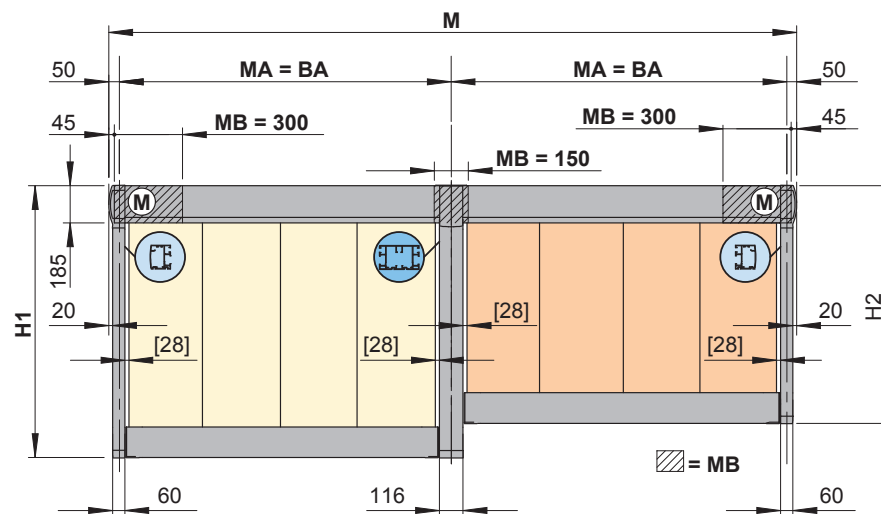


- [...] = dimensions of the cover gap in a standard unit,
no cover gap in units with tracfix system
- BA = width between fixture points
- H = **order dimension** = projection
- H1 = projection long
- H2 = projection short


- M** = overall blind width = **MA** + 100 mm
MA = **order dimension**= awning fixture width = fixture width
MB = bracket fixture range
(M) = motor

dimensions in mm

Coupled unit, 3 fields, 2 motors

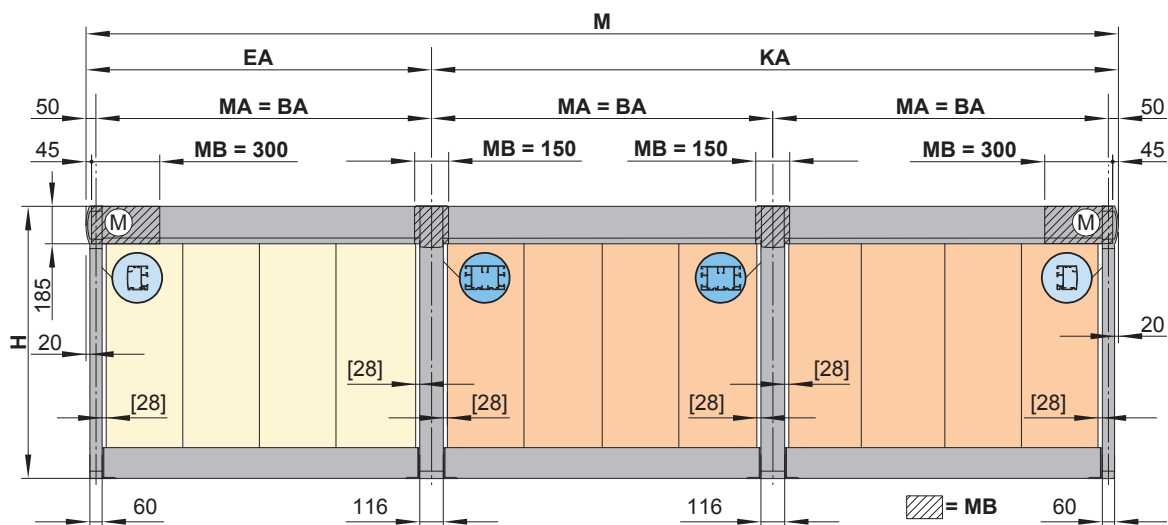


Coupled unit, 3 fields, 3 motors

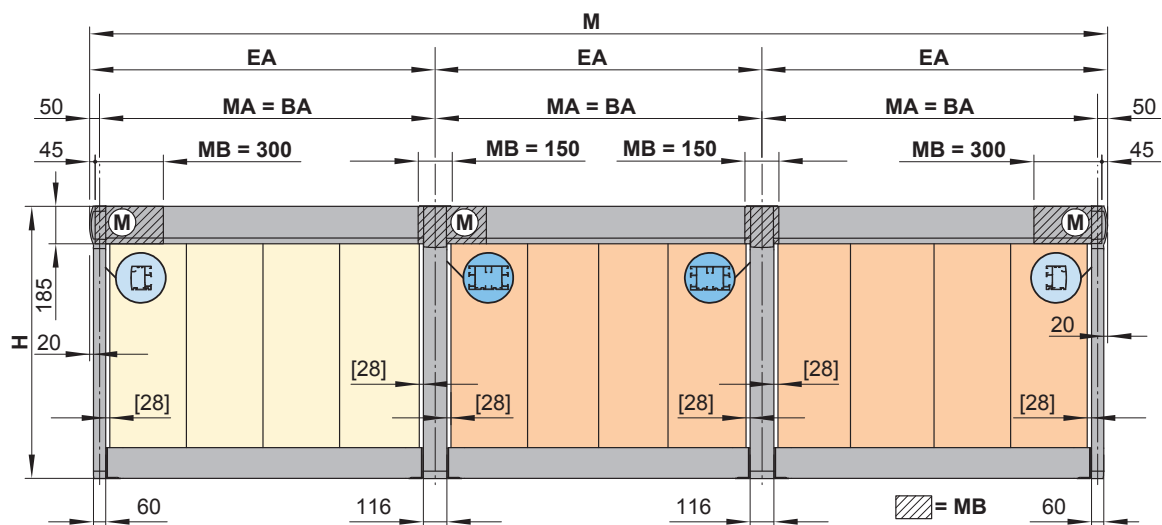

Dimension overview fixture combination 11

Fixtures, fittings and accessories

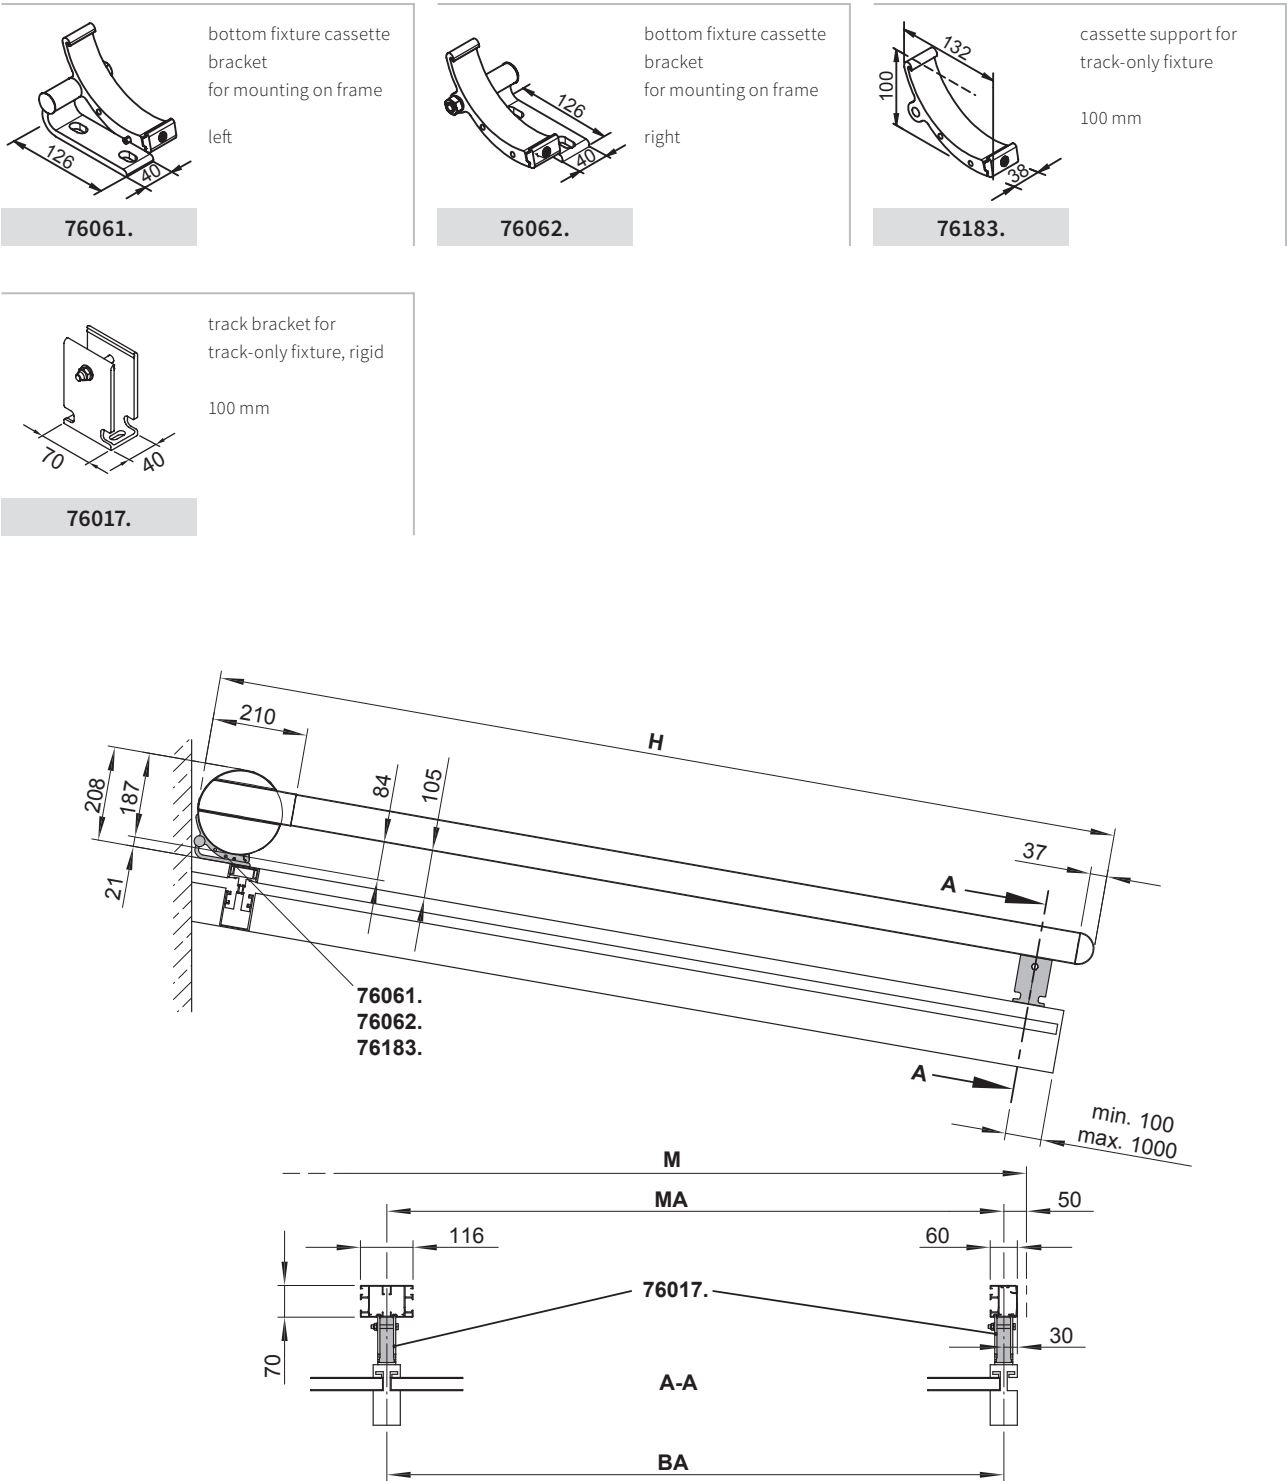


- BA
- =
- width between fixture points
- H
- =
- order dimension** = extension
- M
- =
- awning width
- MA
- =
- order dimension** = awning fixture width = fixture width

dimensions in mm

Dimension overview fixture combination 14

Fixtures, fittings and accessories

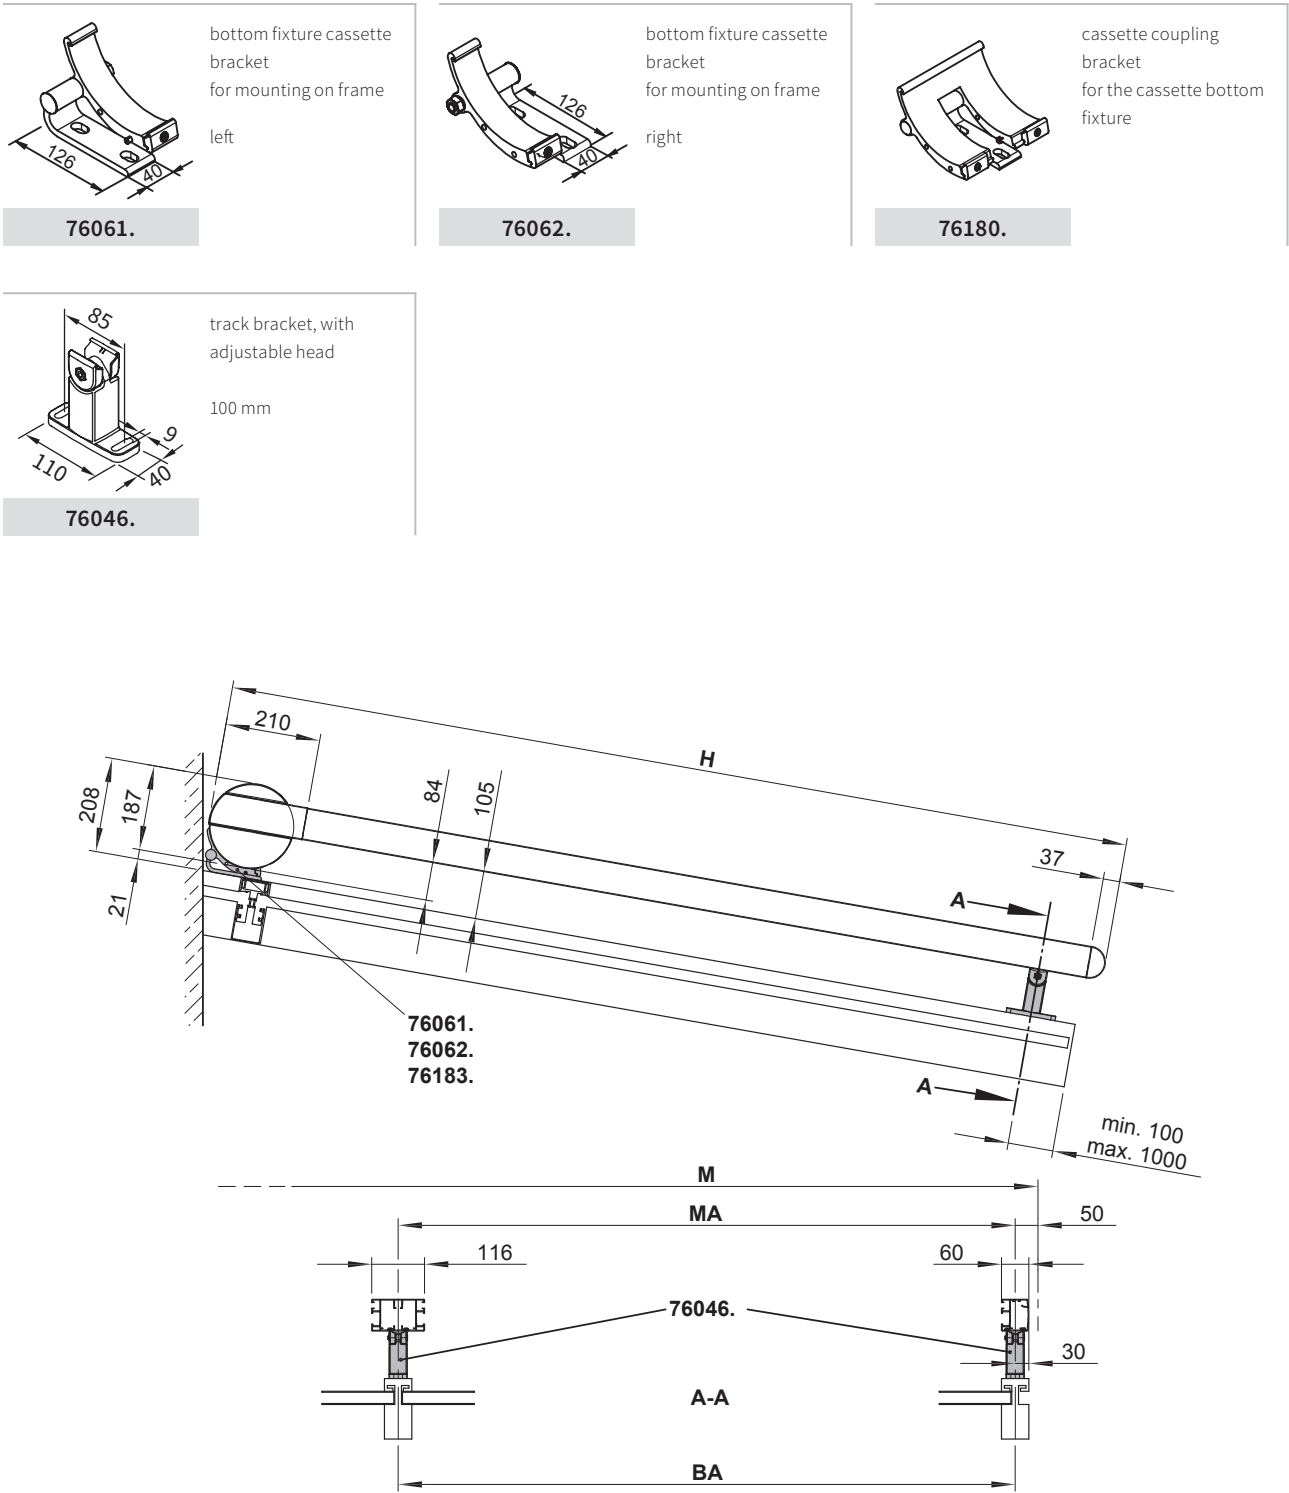


- BA = width between fixture points
- H = **order dimension** = extension
- M = awning width
- MA = **order dimension** = awning fixture width = fixture width

dimensions in mm

Dimension overview fixture combination 21


Fixtures, fittings and accessories



bottom fixture cassette bracket
for mounting on frame

left


76061.



bottom fixture cassette bracket
for mounting on frame

right


76062.



cassette support for
track-only fixture

100 mm



76183.



flat track bracket
with adjustable head


for lateral guide track
fixture

76049.

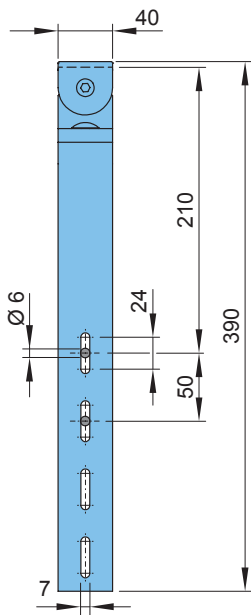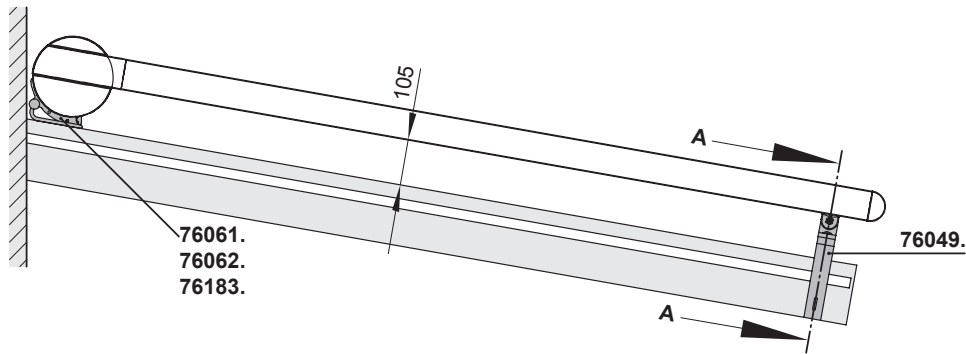

Dimension overview fixture combination 21

Alternative installation options

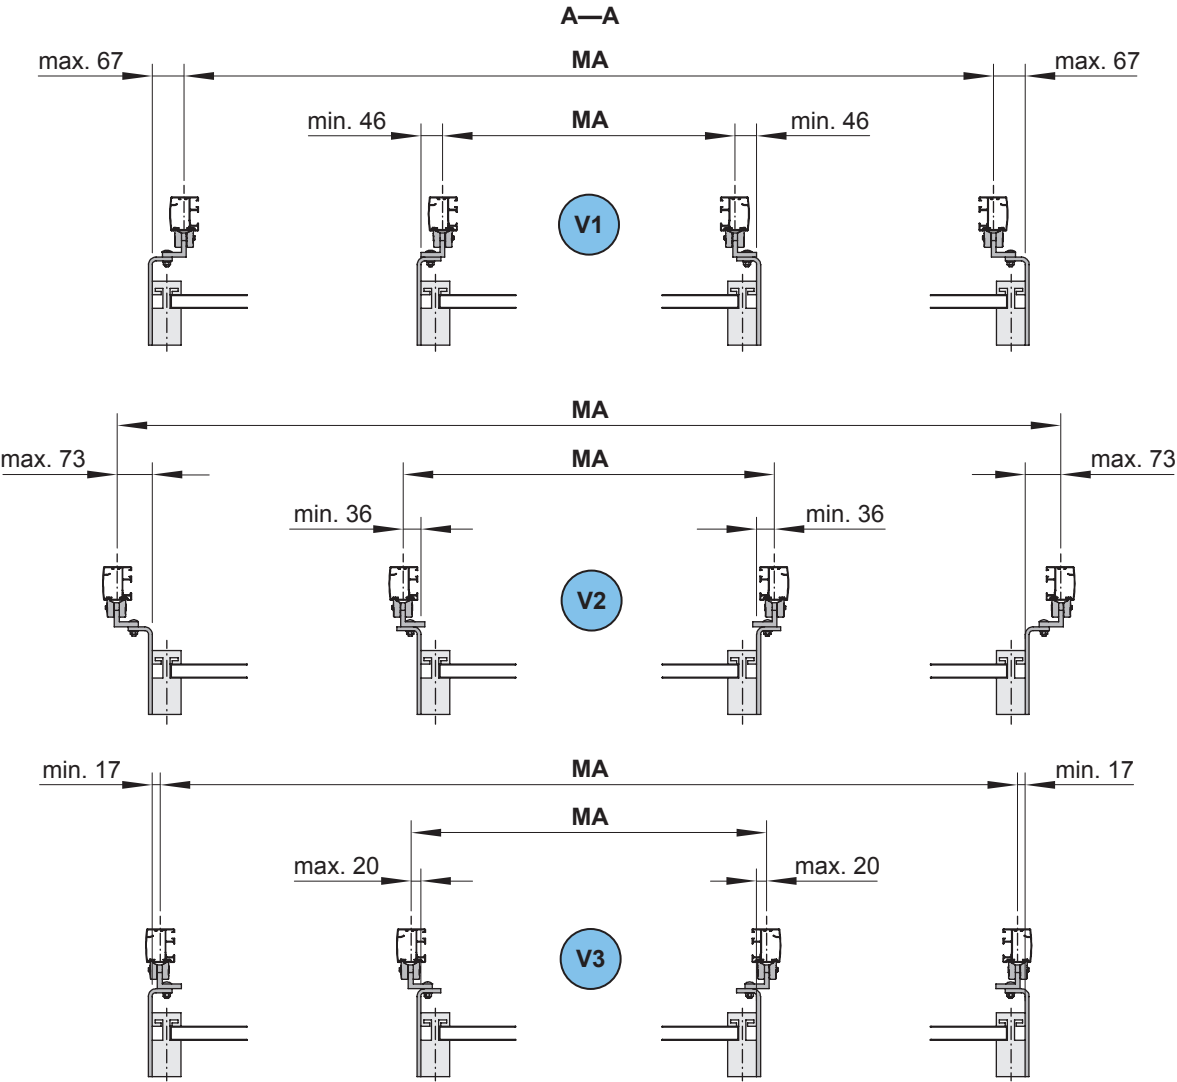


MA = order dimension = blind fixture width = fixture width
V1, V1, V3 = variants

dimensions in mm

Overview of dimensions, fixture type 61 (up to an extension of 400 cm)


Fixtures, fittings and accessories



track bracket, with adjustable head

100 mm


76046.



raised cassette bracket foot can be tilted backwards by up to 45°
head of cassette fixture bracket can be tilted forwards by up to 45°

left


76067.



raised cassette bracket foot can be tilted backwards by up to 45°
head of cassette fixture bracket can be tilted forwards by up to 45°


right

76068.




raised cassette bracket foot can be tilted backwards by up to 45°
head of cassette fixture bracket can be tilted forwards by up to 45°
for coupling point bottom fixture

76198.

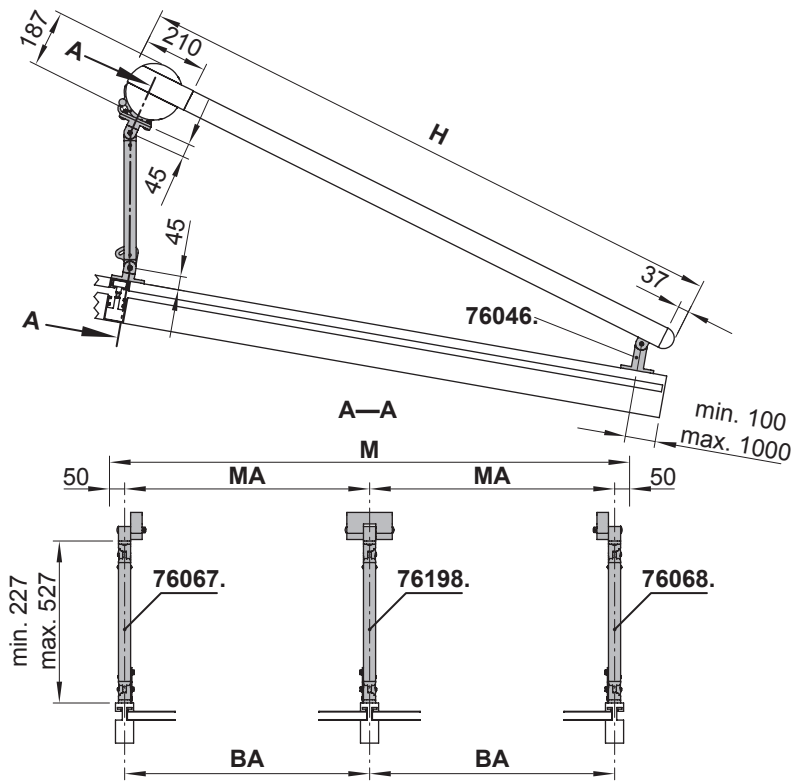

Overview of dimensions, fixture type 81 (from an extension of 400 cm)


Fixtures, fittings and accessories



track bracket, with adjustable head


100 mm

76046.



vario-V bracket
for track fixture


76052.



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°

76067.


left



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°


76068.

right



raised cassette bracket
foot can be tilted
backwards by up to 45°
head of cassette fixture
bracket can be tilted
forwards by up to 45°
for coupling point
bottom fixture

76198.

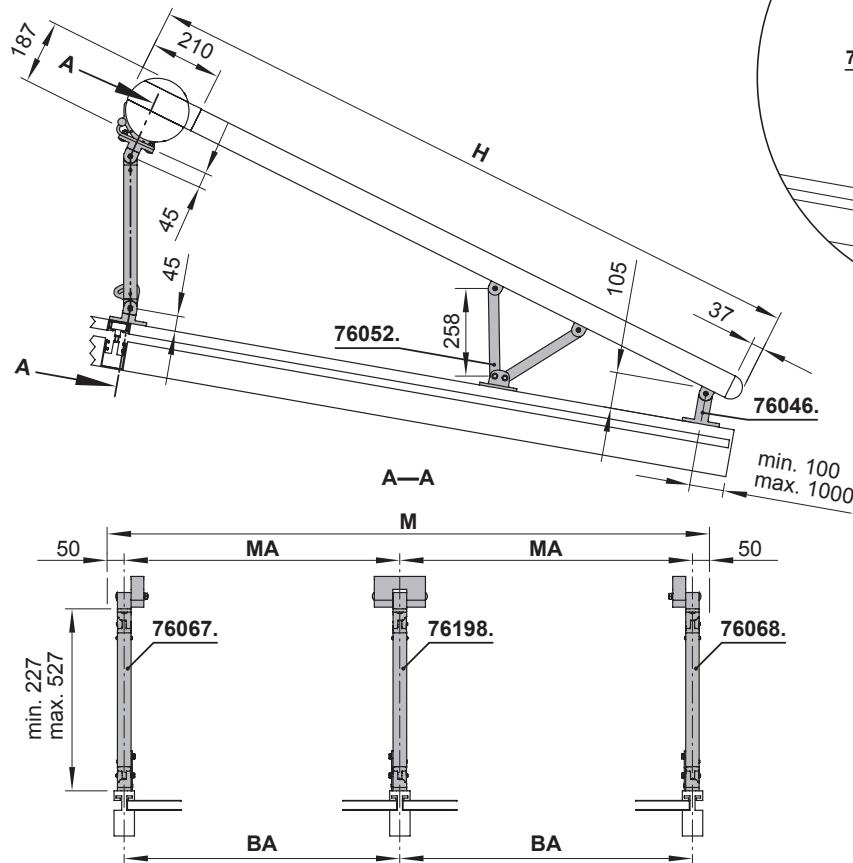


- BA = width between fixture points
H = **order dimension** = extension
M = awning width
MA = **order dimension** = awning fixture width = fixture width

dimensions in mm

Dimension overview fixture combination 31


Fixtures, fittings and accessories



track bracket for
track-only fixture, rigid

100 mm


76017.



cassette support for
track-only fixture

100 mm

76183.

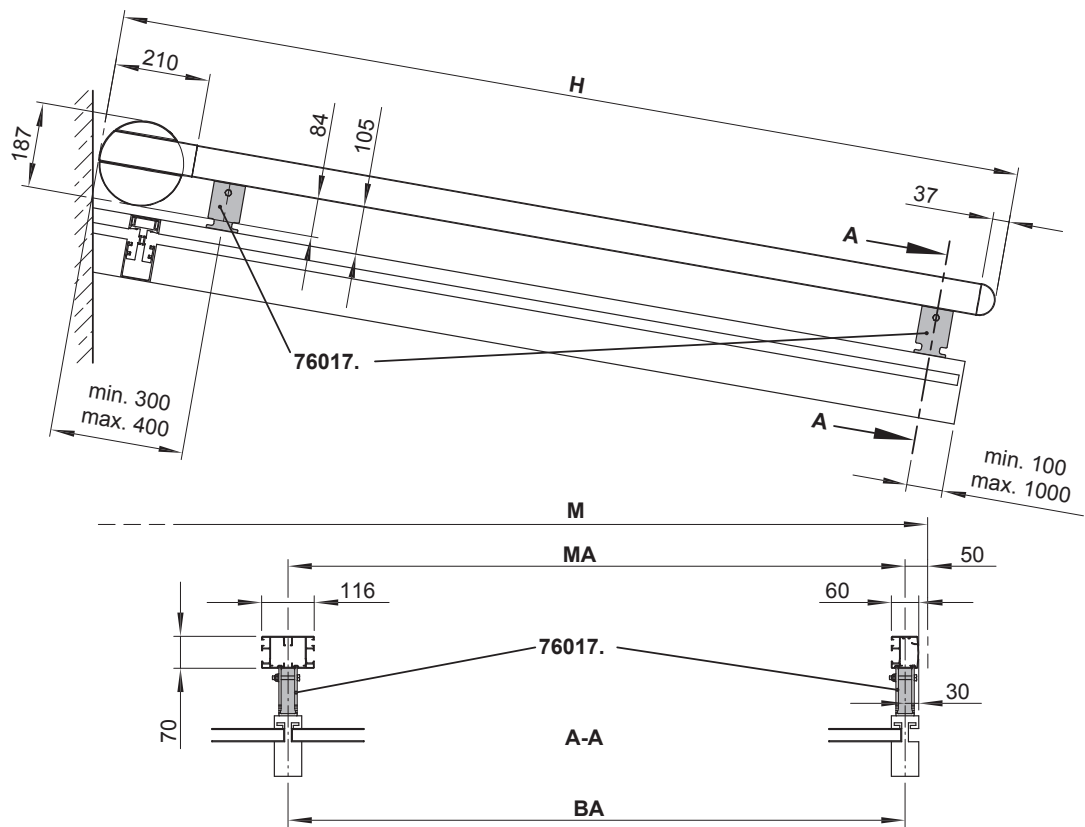


- BA = width between fixture points
- H = **order dimension** = extension
- M = awning width
- MA = **order dimension** = awning fixture width = fixture width

dimensions in mm

Dimension overview fixture combination 32


Fixtures, fittings and accessories



track bracket, with adjustable head


100 mm

76046.



angled mounting bracket


76098.



angled mounting bracket 76098.

including coupling bolts

76099.

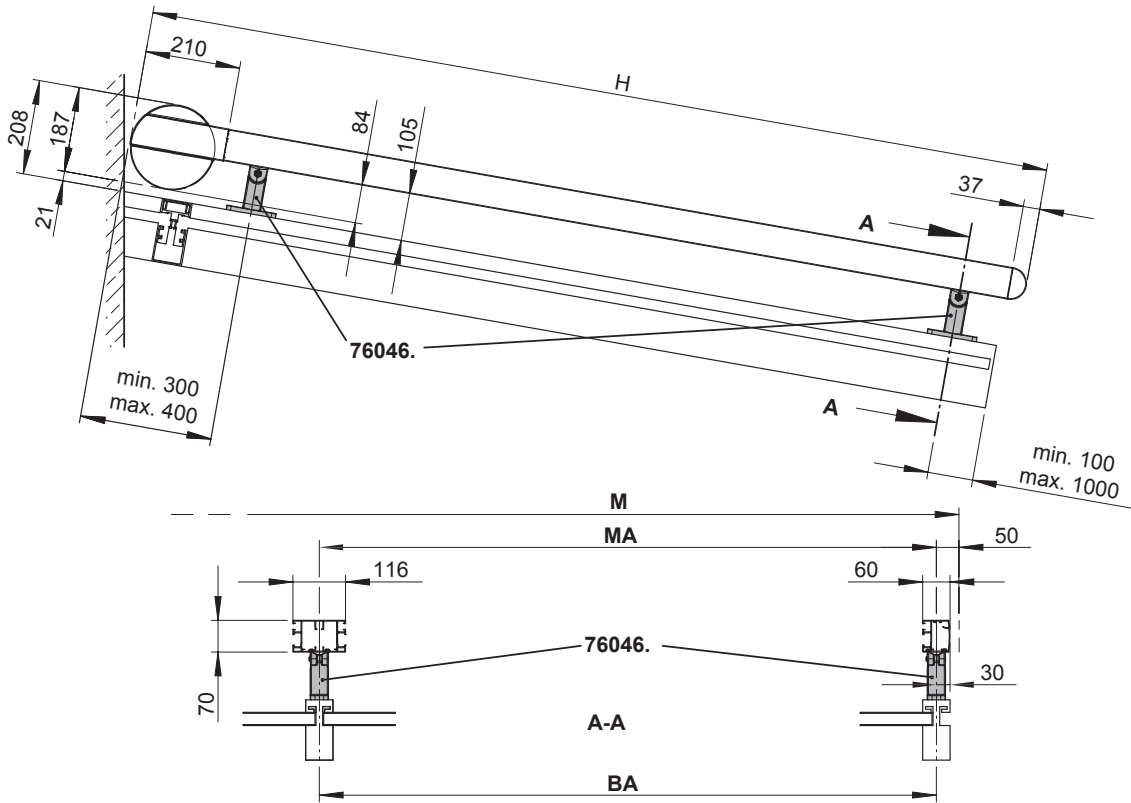


- BA** = width between fixture points
- H** = **order dimension** = extension
- M** = awning width
- MA** = **order dimension** = awning fixture width = fixture width

dimensions in mm

Dimension overview fixture combination 32

Mullion fixture with angled installation brackets

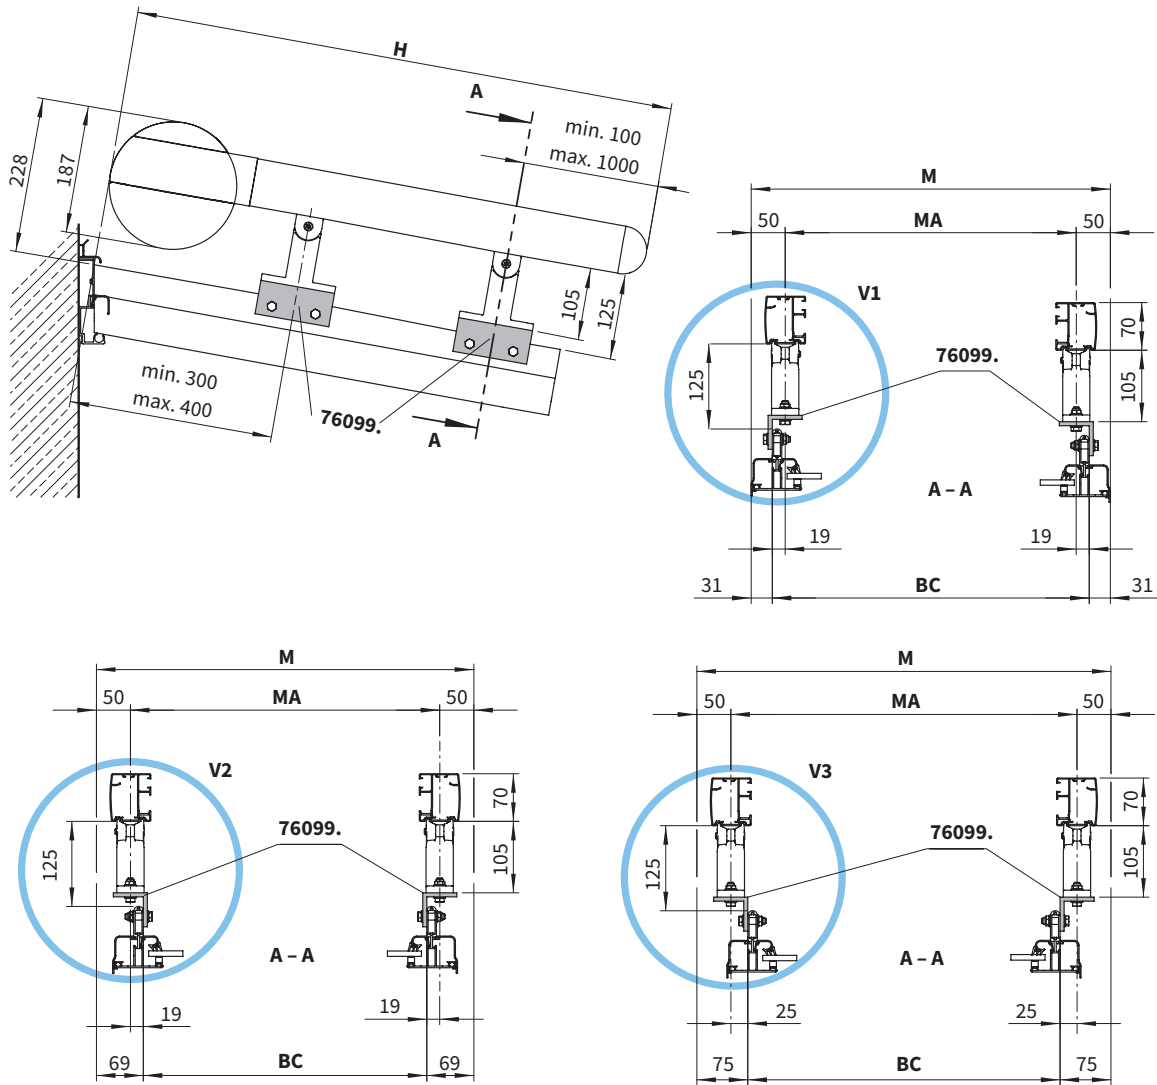


- BC = fixture width
- MA = **order dimension** = blind fixture width = fixture width
- H = **order dimension** = projection
- M = awning width
- V1, V2, V3 = variants

dimensions in mm

Overview of dimensions, fixture type 12 (up to an extension of 400 cm)


Fixtures, fittings and accessories



face fixture cassette
bracket, left

pitch adjustment
range 5°—45°


76063.



face fixture cassette
bracket, right

pitch adjustment
range 5°—45°


76064.



coupling cassette
bracket, central

pitch adjustment
range 5°—45°

76181.





flat track bracket
with adjustable head

for lateral guide track
fixture

76049.

W	AX
5°	26
10°	32
15°	37
20°	43
25°	47
30°	50
35°	52
40°	53
45°	53

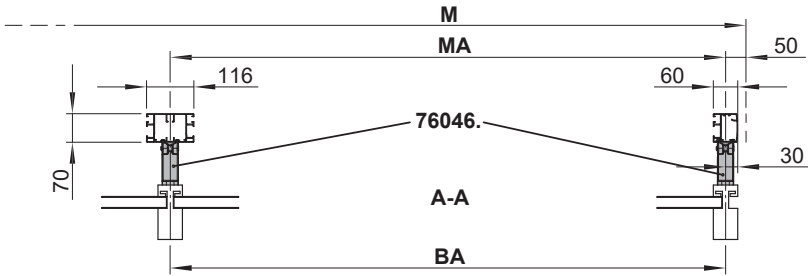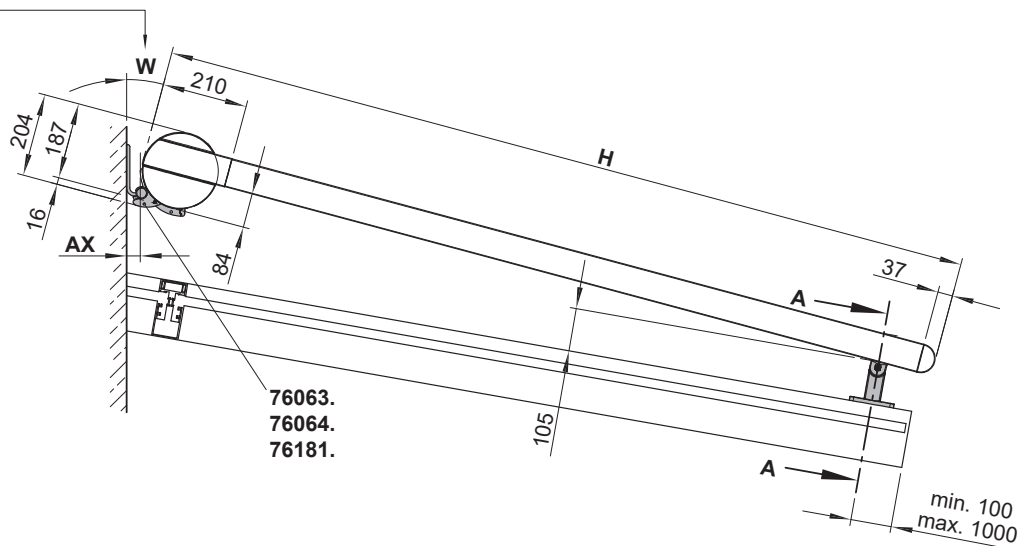


- AX = distance from cassette to wall
- BA = width between fixture points
- H = **order dimension** = extension
- M = awning width
- MA = **order dimension** = awning fixture width = fixture width
- W = pitch

dimensions in mm

Overview of dimensions, fixture type 12 (up to an extension of 400 cm)

Face fixture and track brackets with adjustable head

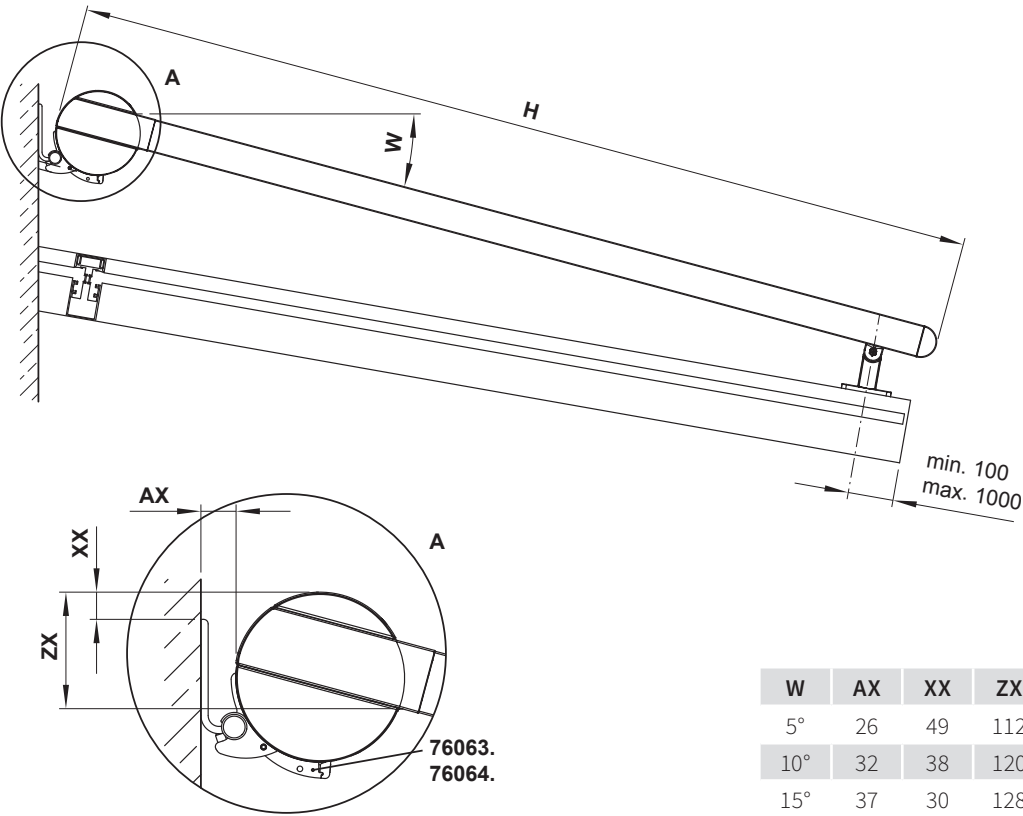


W	AX	XX	ZX
5°	26	49	112
10°	32	38	120
15°	37	30	128
20°	43	22	135
25°	47	13	142
30°	50	4	149
35°	52	-5	156
40°	53	-15	161
45°	53	-24	167

- AX = distance from cassette to wall
- H = **order dimension** = projection
- W = pitch
- XX = distance upper edge bracket – cassette
- ZX = distance upper edge cassette – guide track

dimensions in mm

Overview of dimensions, fixture type 51 (from an extension of 400 cm)


Fixtures, fittings and accessories



face fixture cassette
bracket, left

pitch adjustment
range 5°—45°


76063.



face fixture cassette
bracket, right

pitch adjustment
range 5°—45°


76064.



coupling cassette
bracket, central

pitch adjustment
range 5°—45°

76181.




track bracket, with
adjustable head

100 mm

76046.

W	AX
5°	26
10°	32
15°	37
20°	43
25°	47
30°	50
35°	52
40°	53
45°	53

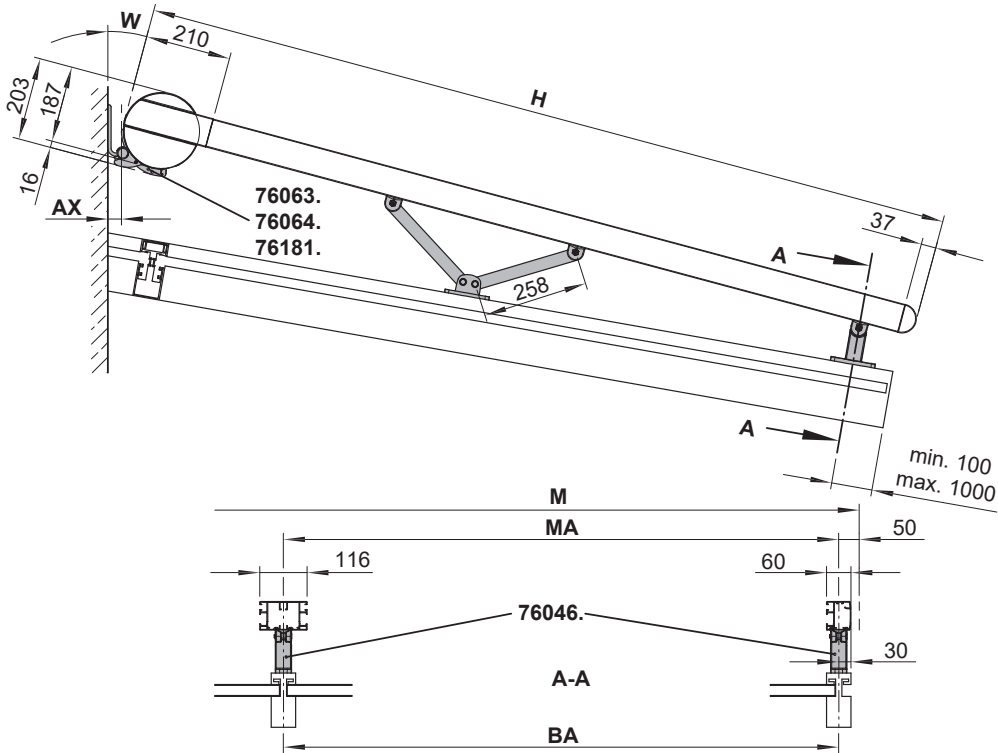


- AX = distance from cassette to wall
BA = width between fixture points
H = **order dimension** = projection
M = awning width
MA = **order dimension** = awning fixture width = fixture width
W = pitch

dimensions in mm

Dimension overview fixture combination 22


Fixtures, fittings and accessories



face fixture cassette bracket, left

pitch adjustment range 5°—45°


76063.



face fixture cassette bracket, right

pitch adjustment range 5°—45°


76064.



coupling cassette bracket, central

pitch adjustment range 5°—45°

76181.




flat track bracket with adjustable head

for lateral guide track fixture

76049.

W	AX
5°	26
10°	32
15°	37
20°	43
25°	47
30°	50
35°	52
40°	53
45°	53

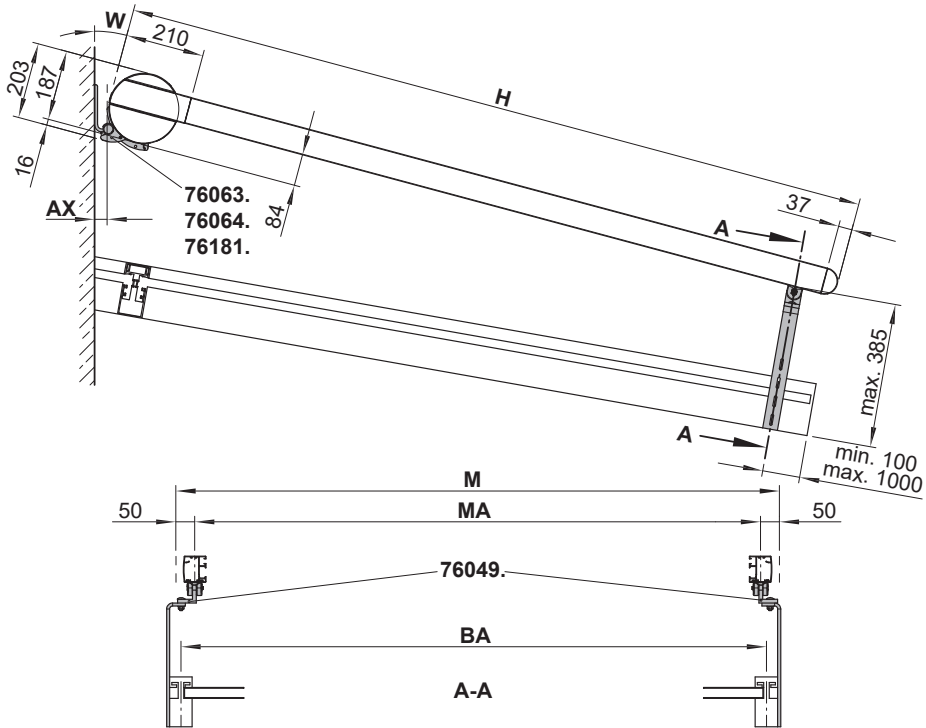

- AX** = distance from cassette to wall
- BA** = width between fixture points
- H** = **order dimension** = extension
- M** = awning width
- MA** = **order dimension** = awning fixture width = fixture width
- W** = pitch

dimensions in mm

Dimension overview eaves fixture with additional bracket fitting


Fixtures, fittings and accessories

track bracket accessory
width 14 mm
for direct assembly on
conservatory rafters

76804.

track bracket accessory
width 25 mm
for direct assembly on
conservatory rafters


76805.

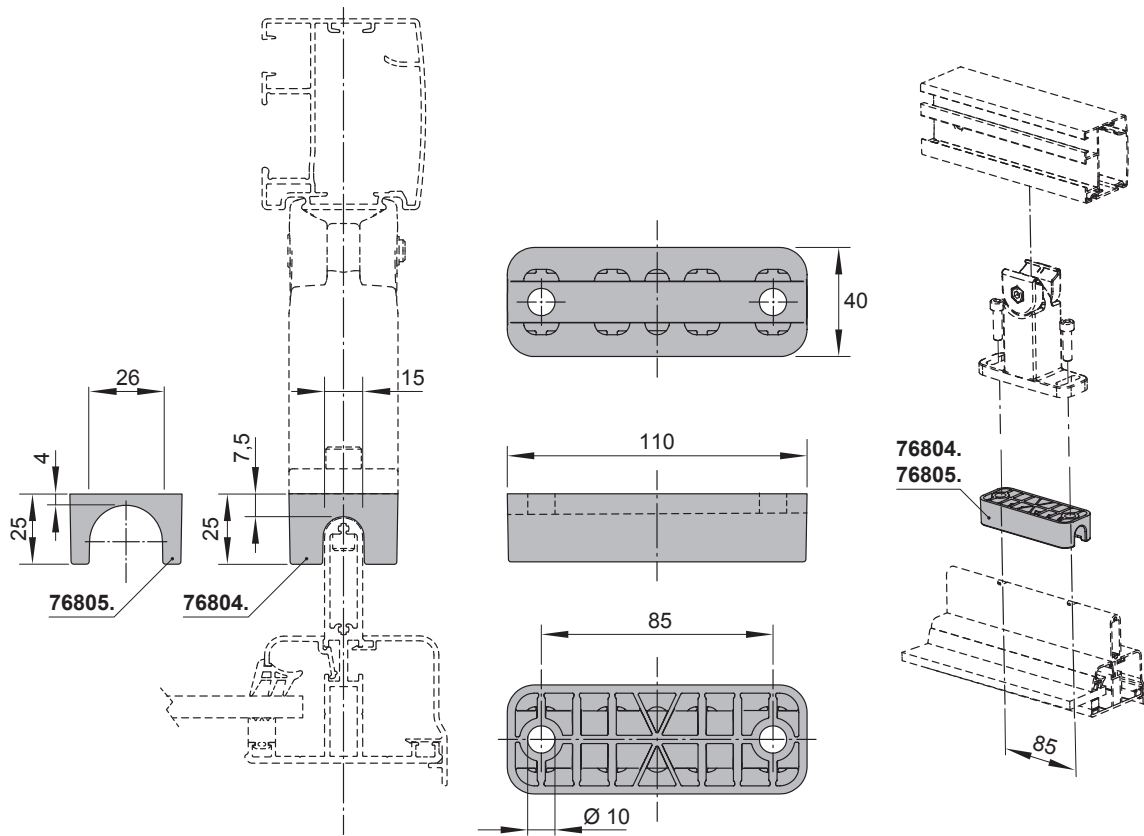


dimensions in mm

Overview of dimensions

Diagonal tensioning kit for raised bottom fixture

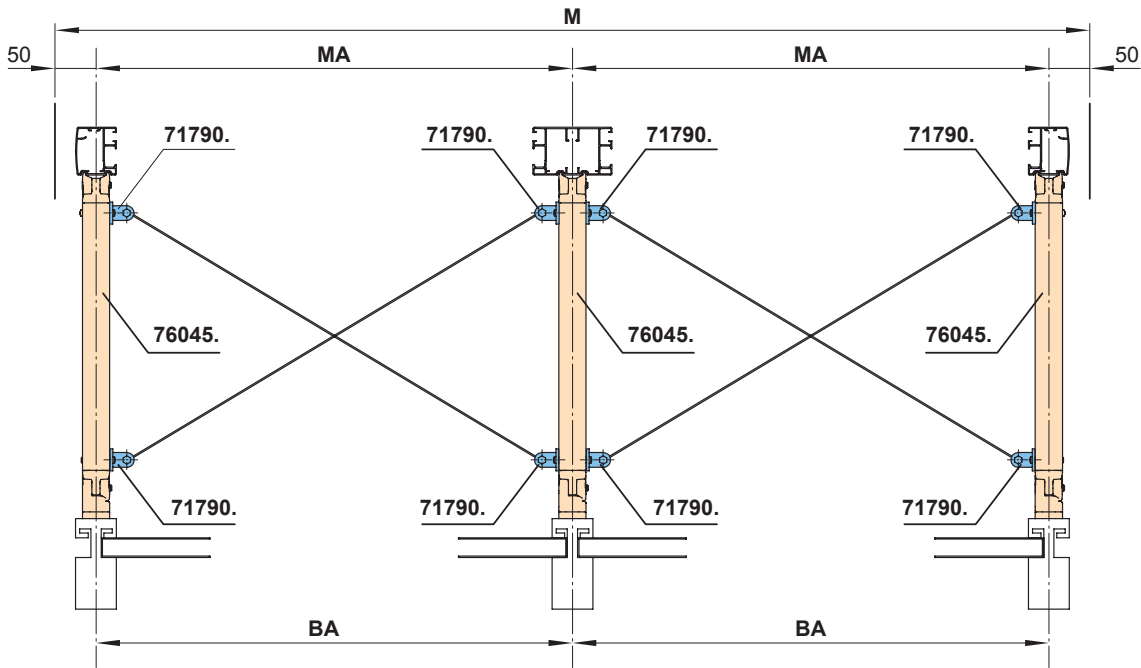

Distance from the back of the cassette to the leading edge of the front profile

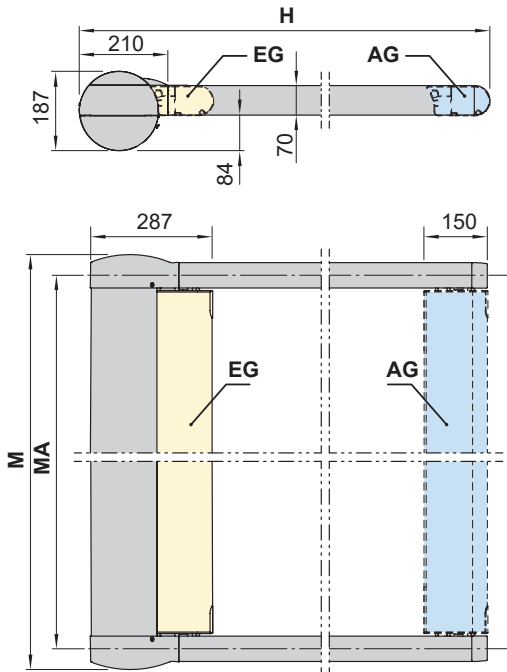


- AG = extended
- BA = width between fixture points
- MA = **order dimension** = awning fixture width = fixture width
- EG = retracted
- H = **order dimension** = extension
- M = awning width
- 71790. = diagonal tensioning kit
- 76045. = track bracket, with adjustable headand foot


dimensions in mm

Overview of dimensions, support to prevent deflection

Support to prevent deflection of the cover support tube, 100 mm

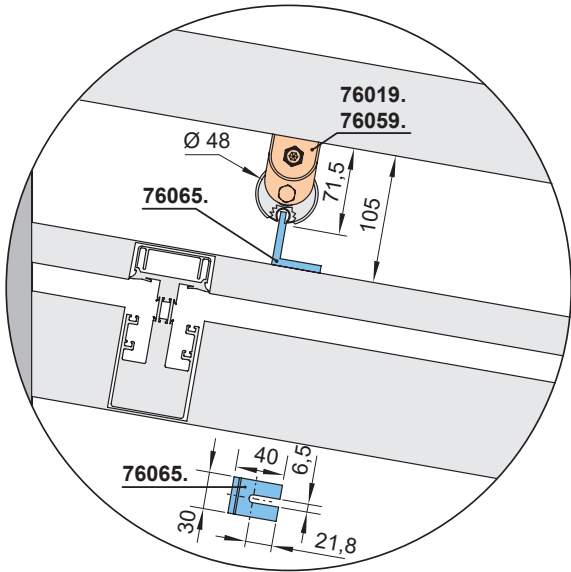


Support to prevent deflection of the cover support tube, can be shortened on site, height range 70–320 mm

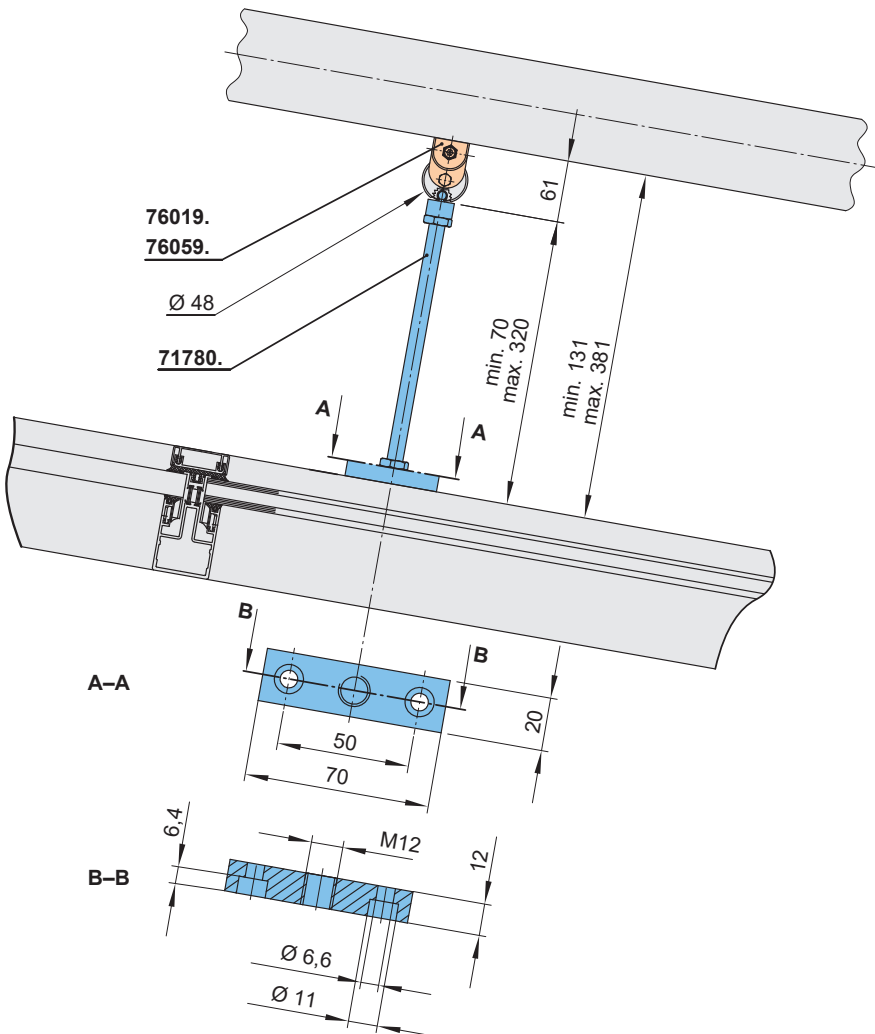

- 71780. = bracket to prevent deflection of the cover support tube
- 76019. = bracket for cover support tube
- 76059. = coupling bracket for cover support tube
- 76065. = angled support bracket


dimensions in mm

Overview of dimensions, double track bracket for single units

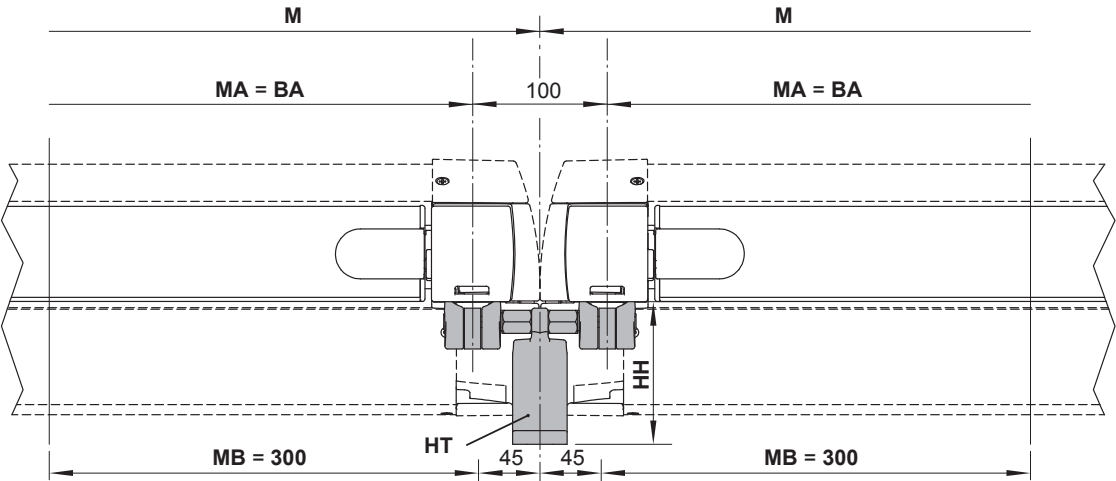

HT	76191.	76192.	76193.	76194.
HH	105	145	145-505	205-505

Motor cable exit point ¹⁾

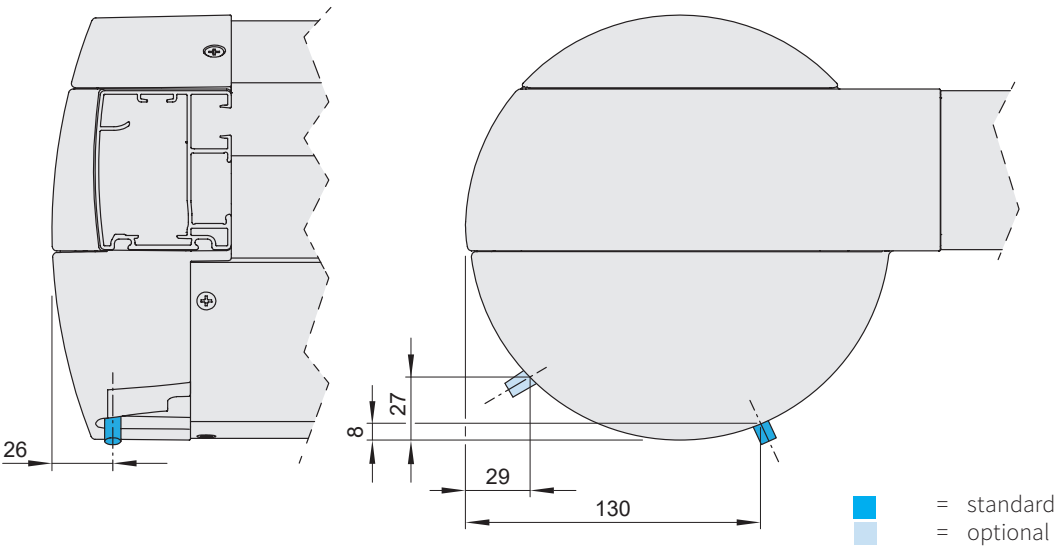

1) depending on the operation side, left or right

- BA

= width between fixture points
- HH

= bracket height
- HT

= bracket
- M

= awning width
- MA

= **order dimension** = awning fixture width =
fixture width
- MB

= bracket fixture range

76191.

= double track bracket 100 mm
76192.

= double track bracket 140 mm
76193.

= double track bracket 140-500 mm
76194.

= double track bracket 200-500 mm

dimensions in mm

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13**
- 14
- 15
- 16
- 17
- 18
- 19
- 20