



Open awning

Topas

Topas with roof | without roof

The **Topas** is a classic entry-level awning for anyone wanting to save money without sacrificing quality. Its uncomplicated technology makes it stable and wind-resistant. When open, the awning stands out for its extreme flexibility: with or without a protective roof, it can be installed in various ways to fit into all kinds of different structural situations and applications.

UPDATE july 2020

Page 151,
Wind resistance classes
corrected and table added
Page 161,
Mounting plates added
Page 163,
Technical drawing rafter
bracket added



Wall bracket:
Easy installation



Versions:



Topas with roof



Topas without roof

Mounting options:

Installation on walls, ceilings and rafters is possible



Wall mounting



Ceiling mounting



Rafter mounting


Topas Highlights

01

Joined units:

With roller supports

or jockey cover



weinor LongLife arm:

Very durable and
low-noise

Topas Benefits



Open or with a roof – classic design with the latest technology

With its simplified technology the weinor Topas is stable yet retains a wide variety of functions.

- Stable front profile
- with and without roof
- Large widths
- Wind-resistant
- Wide selection of fabrics



LED Design light bar – 30,000 hours of lighting with minimal energy consumption (optional)

Select LED components for top weinor quality:

- Atmospheric light thanks to special glass lenses
- Highly energy-efficient
- Operating life of 30,000 hours
- Radio-controlled dimmer using BiConnect
- Fitted to carrier bar using angle bracket
- Easy to service: simply replace individual LED lights without uninstalling the awning



weinor LongLife Arm – durable, quiet operation

The weinor LongLife arm features an exceptionally robust high-tech belt.

- Tested to more than 100,000 cycles
- Extremely quiet operation
- No maintenance required
- Drop forged aluminium in joint – light but highly robust



Multi-section units – to shade especially large areas

The Topas also comes as a combined multi-section unit for very large terraces.

- As a 2-part unit up to 1,200 cm
- Jockey cover or roller support with continuous fabric

Topas Technology

01

Topas versions	Topas with roof	Topas without roof
Technology		
Max. width, 1-section/2-section with jockey cover	700 cm/1,200 cm	700 cm/1,200 cm
Max. projection	400 cm	400 cm
Side limits (w x h) incl. standard bracket	220 mm x 210 mm	210 mm x 180 mm
Coupled systems	○	○
Motor drive	● as standard	● as standard
Angle of pitch on awning	5° to 40° *	5° to 40° *
Installation alternatives	can be installed on walls, ceilings and rafters	
LED lighting: (Design light bar)	○	○
LongLife arm	● as standard	● as standard
Accessories		
Heating system Tempura/Tempura Quadra	○	○
LED Design light bar	○	○
BiSens Agido-3V product protection sensor	○	○
Controls		
Radio control	○	○
No remote	●	●
Weather sensors		
Sun/wind sensor BiConnect BiSens SW-230 V	○	○
Sun/wind sensor solar powered BiConnect BiSens SW-Solar+	○	○
Sun/wind/rain sensor BiConnect-BiSens-SWR-230V	○	○
Quality		

Tested up to **Update** wind resistance class 1** according to DIN 13561 (wind strength 4 on the Beaufort scale)

* When the bracket is mounted on the inside of the folding arm, the awning's maximum pitch adjustment is 20°.

** See awnings price list page 37

● standard ○ optional — unavailable

Topas – wind resistance classes 1–2

Width in cm	No. of arms	Projection in cm					
		150	200	250	300	350	400
190 – 200	2						
201 – 250	2						
251 – 300	2						
301 – 350	2						
351 – 400	2						
401 – 450	2						
451 – 500	2						
501 – 550	2						
551 – 600	2						
601 – 650	2						
651 – 700	3						

 wind resistance class 2
 wind resistance class 1

Topas Controls

weinor BiConnect radio controller

Product	Electronics	BiConnect control	Remote receiver	Transmitter
Topas	Topas drive	• BiRec receiver integrated into cassette	Elero SunTop-868 remote-controlled motor	• BiEasy 1M/5M/15M Go! hand transmitter • App • 1MW-3V wall transmitter
Topas	Topas drive	• BiRec receiver integrated into cassette	BiRec MA-K	• BiEasy 1M hand transmitter • 1MW-3V wall transmitter
Topas LED	Topas drive and LED Design light bar	• BiRec receiver for main driv integrated into awning • Additional BiConnect Empfängerreceiver for the LED light bar (with integrated power supply pack) integrated into light bar • LED dimmbar	Elero SunTop-868 remote-controlled motor and BiRec LED	• BiEasy 5M/15M Go! hand transmitter • App
Accessories (optional)	Tempura/Tempura Quadra heating system	• Dimmable, additional receiver required • Installation of the reciever in the design bar provided for this purpose or the Tempura Quadra box	BiRec HD	• BiEasy 5M/15M Go! hand transmitter • App

Requires: awning with BiConnect remote control and sensors require a BiEasy 1M, 5M or 15M Go!

Somfy io-homecontrol® radio technology

Product	Electronics	Somfy io-homecontrol control	Remote receiver	Transmitter
Topas	Topas drive	• Somfy io remote-controlled motor integrated into awning	Somfy io remote-controlled motor	• Situo 1 io Pure II/Situo 5 io Pure II/Situo 5 Variation A/M io Pure II hand transmitter • Smoove 1 io Pure Shine wall transmitter
Topas LED	Topas drive and LED Design light bar	• Somfy io remote-controlled motor integrated into awning • Additional Somfy receiver for the LED light bar (with downstream power supply pack) integrated into light bar • LED not dimmable	Somfy io remote-controlled motor and io Lighting Receiver Variation on/off	• Situo 5 io Pure II/Situo 5 Variation A/M io Pure II hand transmitter
Accessories (optional)	Tempura/Tempura Quadra heating system	• Not dimmable, additional receiver required • Installation of the reciever in the design bar provided for this purpose or the Tempura Quadra box	Heating Slim Receiver on/off io 2KW STAS3/STAK3	• Situo 5 io Pure II/Situo 5 Variation A/M io Pure II hand transmitter • Smoove 1 io Pure Shine wall transmitter

Somfy RTS radio technology

Product	Electronics	Somfy RTS control	Remote receiver	Transmitter
Topas	Topas drive	• Somfy RTS remote-controlled motor integrated into awning	Somfy RTS remote-controlled motor	• Situo 1 RTS Pure II/Situo 1 Soliris RTS Pure II/Situo 5 RTS Pure II/Situo 5 Soliris RTS Pure II hand transmitter • Smoove 1 RTS Pure Shine wall transmitter
Topas LED	Topas drive and LED Design light bar	• Somfy RTS remote-controlled motor integrated into awning • Additional Somfy receiver for the LED light bar (with downstream power supply pack) integrated into light bar • LED not dimmable	Somfy RTS remote-controlled motor and Lighting Slim Receiver RTS	• Situo 5 RTS Pure II/Situo 5 Soliris RTS Pure II hand transmitter
Accessories (optional)	Tempura/Tempura Quadra heating system	• Not dimmable, additional receiver required • Installation of the reciever in the design bar provided for this purpose or the Tempura Quadra box	Heating Slim Receiver RTS Plug	• Situo 5 RTS Pure II/Situo 5 Soliris RTS Pure II hand transmitter

Hard wired with Somfy control

Product	Electronics	Hard wired Somfy control	Control
Topas	Topas drive	Somfy control for awning drive	e.g. Soliris Smooove Uno
Topas LED	Topas drive and LED Design light bar	- Somfy control for awning drive - Switch on site for the LED light bar - LED power supply pack integrated into the light bar - LED not dimmable	e.g. Soliris Smooove Uno and suitable light switch (on site)
Accessories (optional)	Tempura/Tempura Quadra heating system	Not dimmable	Suitable switch (on site)

Hard wired (existing switch/power supply on site)

Product	Electronics	Hard wired control	Control
Topas	Topas drive	Awning switch for the awning drive	e.g. double rocker switch switch (on site)
Topas LED	Topas drive and LED Design light bar	- Awning switch for the awning drive - Switch on site for the LED light bar - LED power supply pack integrated into the light bar - LED not dimmable	e.g. double rocker switch and suitable light switch (on site)
Accessories (optional)	Tempura/Tempura Quadra heating system	Not dimmable	Suitable switch (on site)




Note:

Please see the "Accessories" technical brochure for further details regarding the drive and control.

Some options are subject to a surcharge. For prices, please refer to the weinor awnings price list.

Topas Planning

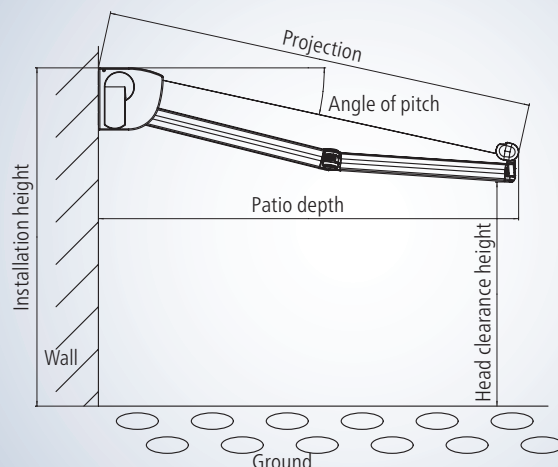

Site measurements – determining the projection and head clearance height

- Find the projection by looking in the “Projection” table for the terrace depth.
- Using the projection from the table and the required angle of pitch, consult the “head clearance height” table for the head clearance height. This head clearance height refers to an installation height of 300 cm.
- Add/subtract the difference between 300 cm and the actual installation height to/from the head clearance height in the table.

Determining the projection

Angle of pitch	Terrace depth in cm					
	150	200	250	300	350	400
5°	150	200	250	300	350	400
15°	160	210	260	310	360	400
25°	170	220	280	330	390	400

Projection in cm (rounded figures)

This table can be used to find the awning projection for any given horizontal patio depth.

Determining the head clearance height

Angle of pitch	Projection in cm					
	150	200	250	300	350	400
5°	270	270	270	260	260	250
15°	250	240	220	210	200	180
25°	220	200	180	160	140	120

Head clearance height in cm (rounded figures)

This table is used to find the head clearance heights for various projections when the angle of pitch is 5°, 15° or 25°.

This table is based on the example of an installation height of 300 cm (upper edge of awning).

Wall bracket

01

Sizes and bracket recommendations



Width in cm	Number of arms	Projection in cm (irregular figures possible)					
		150	200	250	300	350	400
– 250	2	●	●	●	●	●	●
251 – 300	2	●	●	●	●	●	●
301 – 350	2	●	●	●	●	●	●
351 – 400	2	●	●	●	●	●	●
401 – 450	2	●	●	●	●	▲	▲
451 – 500	2	●	●	●	●	▲	▲
501 – 550	2	●	●	●	●	▲	▲
551 – 600	2	●	●	●	▲	▲	▲
601 – 650	2	●	●	●	▲	▲	▲
651 – 700	3	●	●	●	▲	▲	▲

Wall mounting on C20/25 concrete


with up to 200-mm facing, wind resistance class 2 and a permissible centric tensile load of 5.71 kN for anchor bolts

- 2 x Topas standard wall brackets 85 mm
- 3 Topas standard wall brackets 85 mm
- 4 Topas standard wall brackets 85 mm
- ▲ 5 x Topas standard wall brackets 85 mm
- ▲ 7 x Topas standard wall brackets 85 mm

Position of wall brackets and Topas

Pitch up to 40° (KS1)
outside


Pitch up to 20° (KS2)
inside

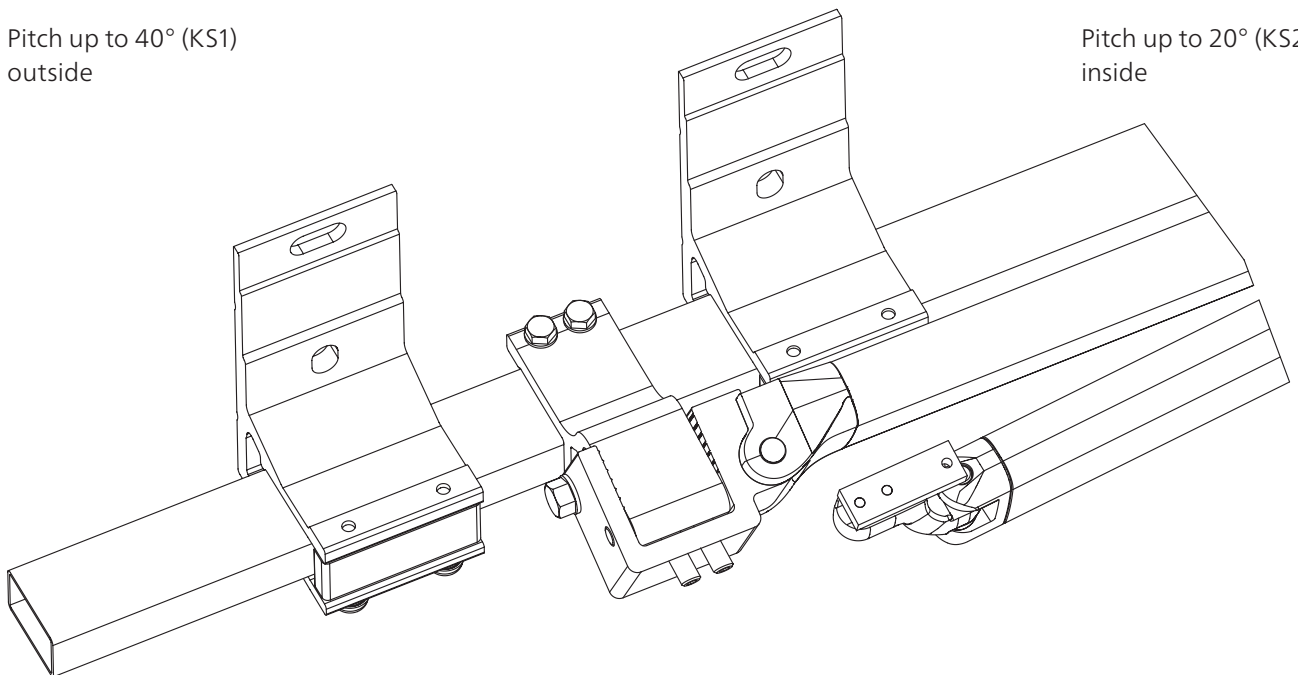


When the bracket is mounted on the inside of the folding arm, the awning's maximum pitch adjustment is 20°.

Position of wall brackets and Topas


Wall bracket 85 mm on both sides (KS1 and KS2)

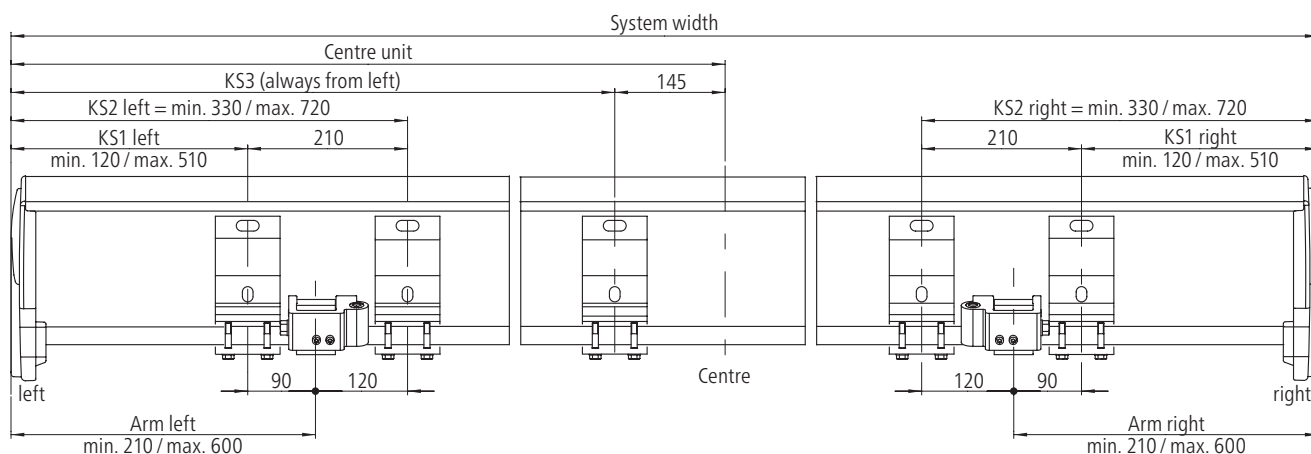

Wall bracket 85 mm outside (KS1)

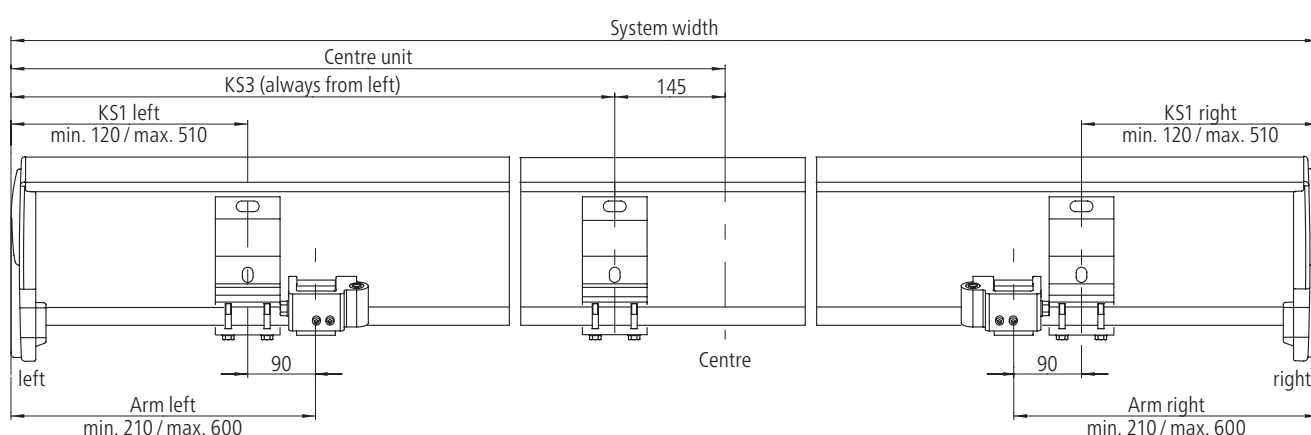

Wall bracket 85 mm inside (KS2)

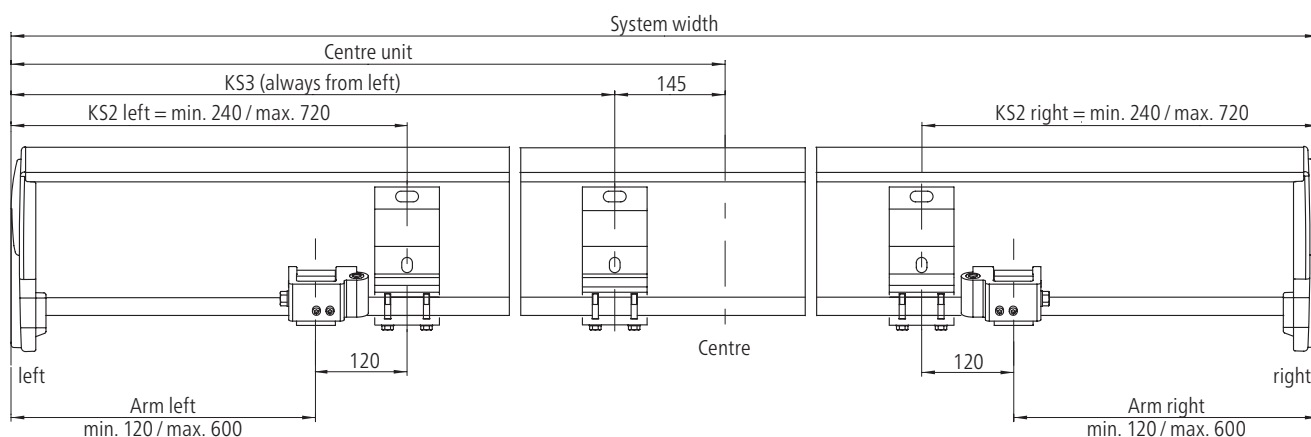


Notes:


- KS1 = outside bracket
- KS2 = inside bracket
- KS3 = centre bracket

Position of wall brackets and Topas


Wall bracket 260 mm on both sides (KS1 and KS2)

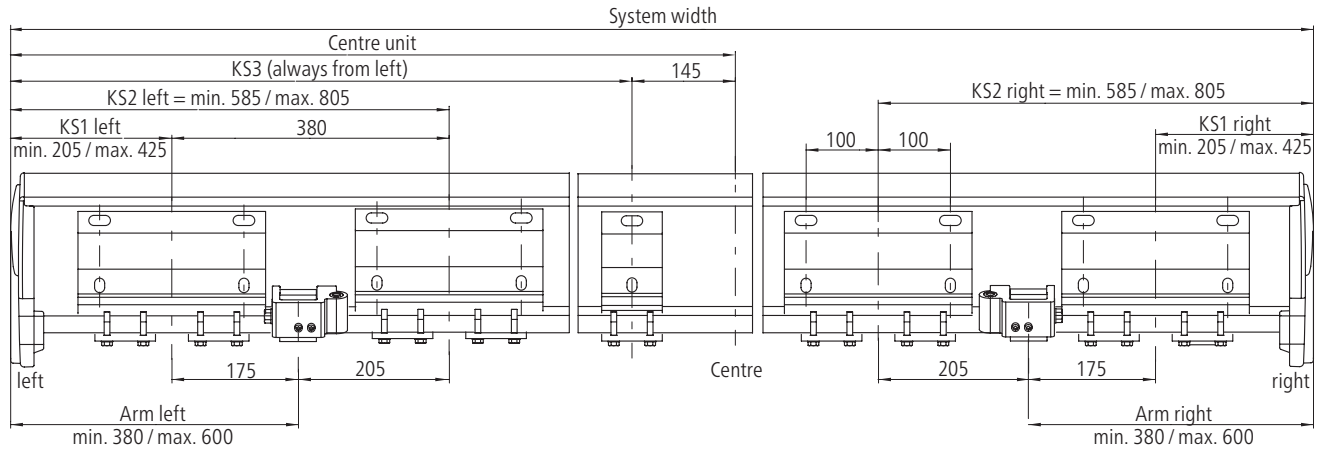

Wall bracket 260 mm outside (KS1)

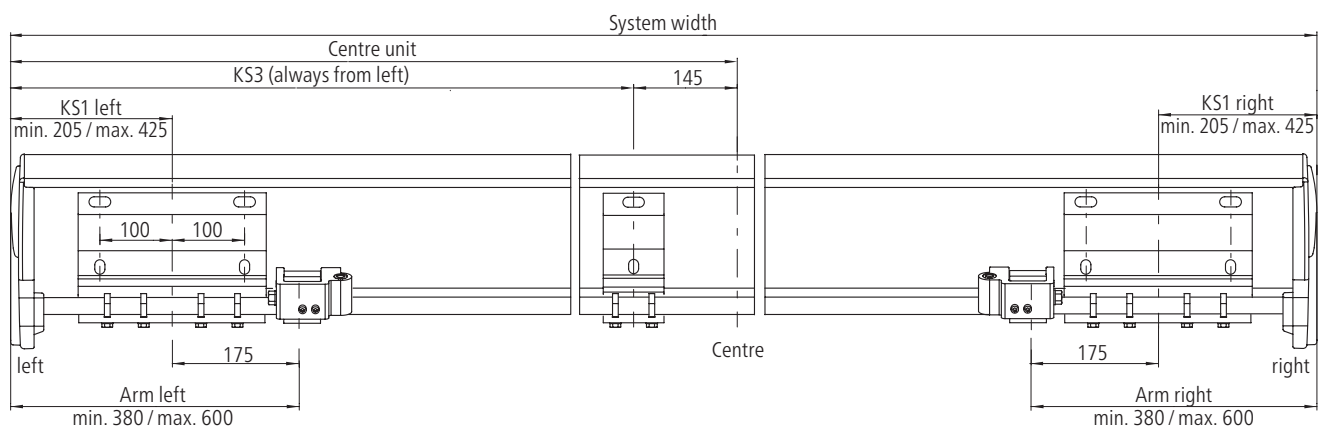

Wall bracket 260 mm inside (KS2)

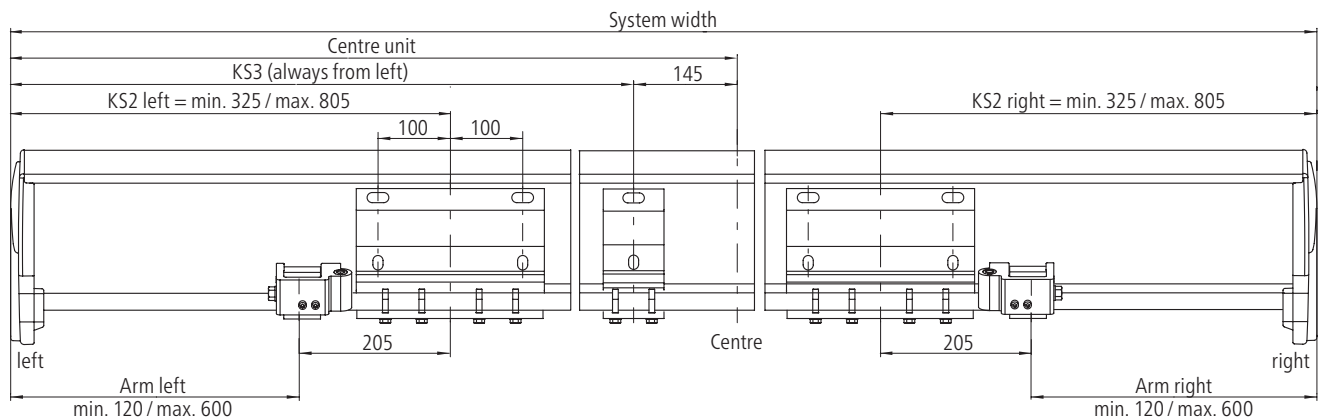

Notes:


KS1 = outside bracket

KS2 = inside bracket


KS3 = centre bracket

Cross-sections

Topas without roof

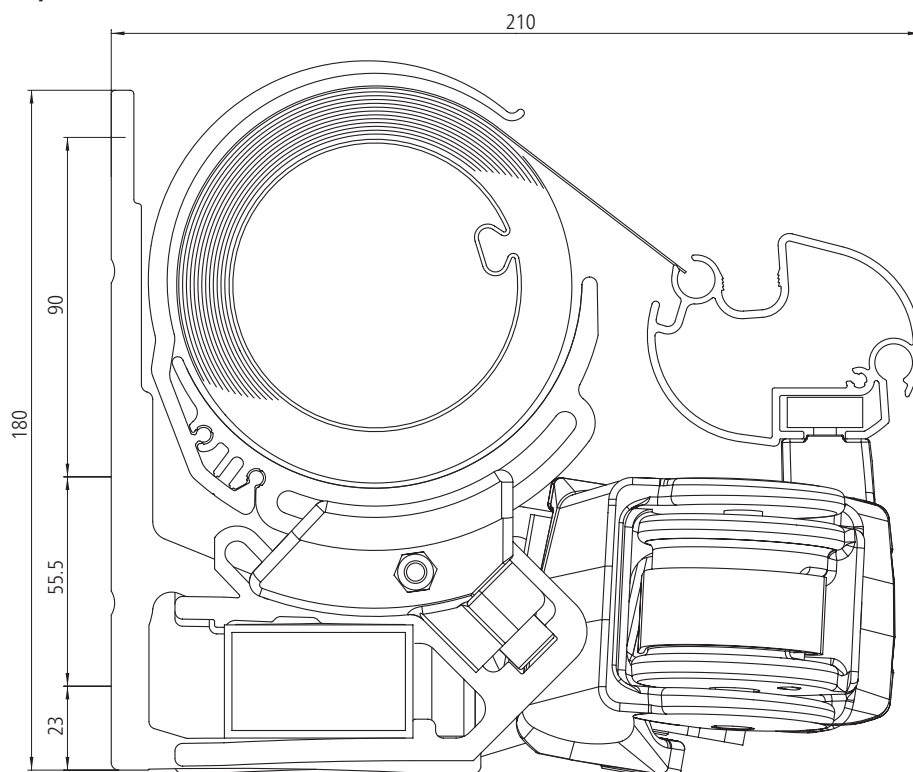


Topas with roof

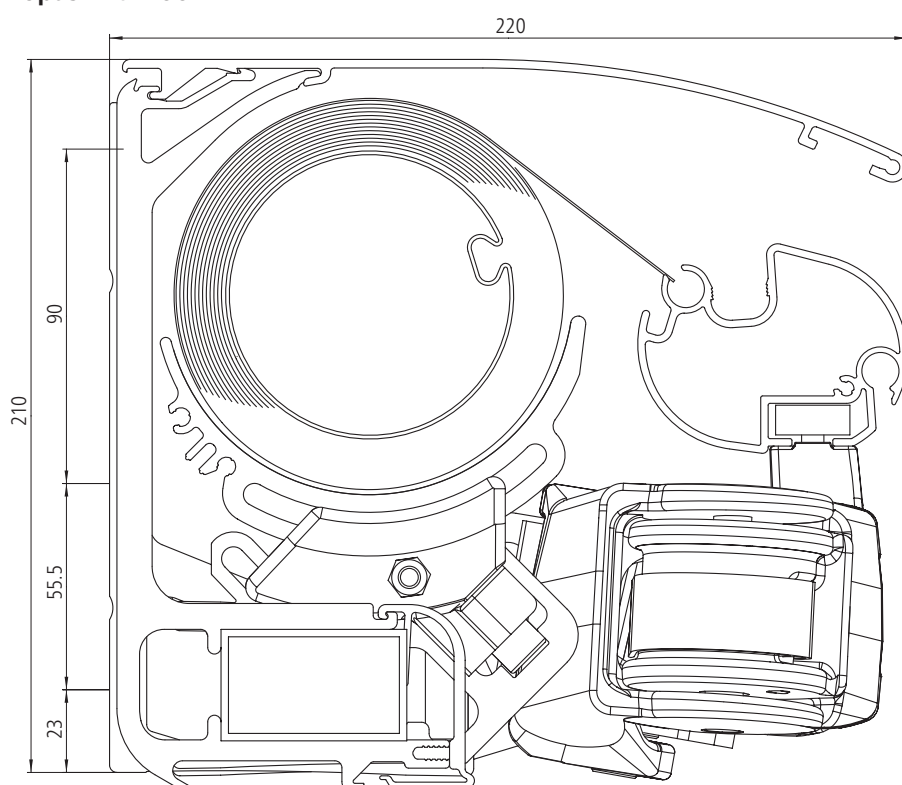


Cross-sections

Topas without roof with LED

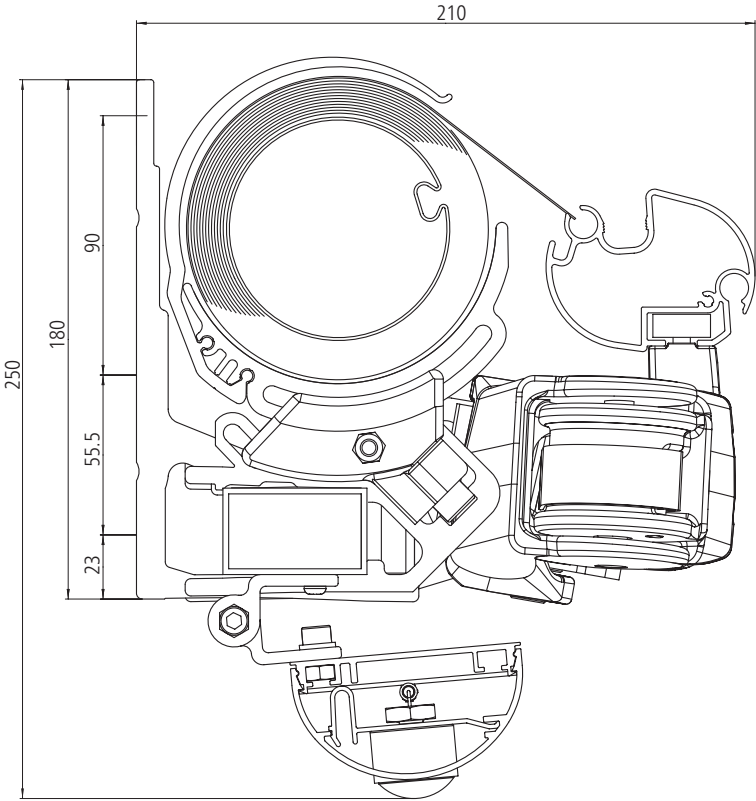

Topas with roof with LED


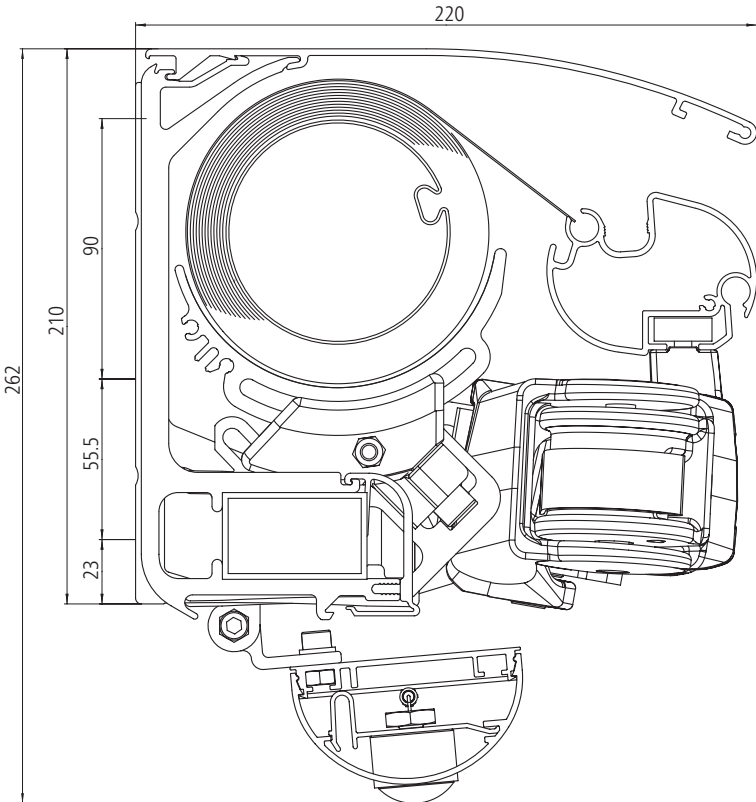


Topas Installation



Installation on walls, ceilings and rafters is possible

Its dimensions mean that the Topas can be mounted in a wide range of ways: not only on a wall but also on a ceiling or a rafter. The brackets and mounting plates are made of extruded, powder-coated aluminium.


Wall mounting – brackets

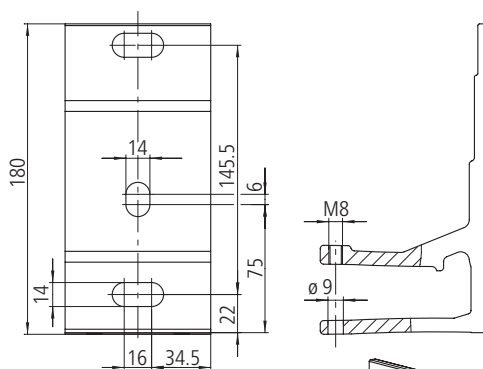

85 mm wall bracket

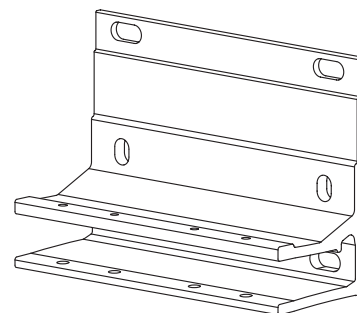

260 mm wall bracket

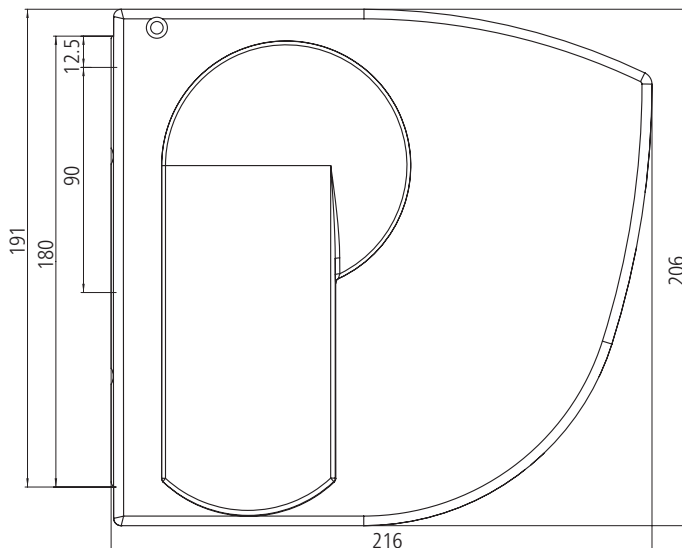

Side view of Topas with roof fitted to a wall

Wall mounting – mounting plates

Update


01



Mounting plate 640 x 280 x 15 mm




Position of the mounting plates using the Topas 500 x 300 cm* as an example.

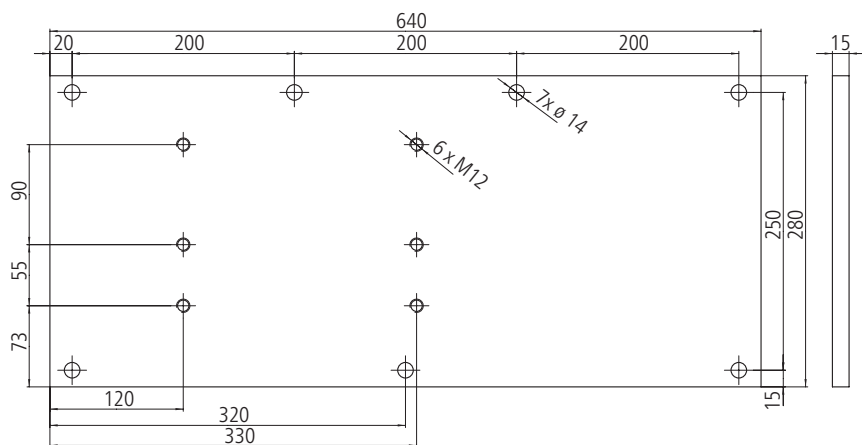

Mounting plate 640 x 370 x 15 mm




Position of the mounting plates using the Topas 500 x 300 cm* as an example.

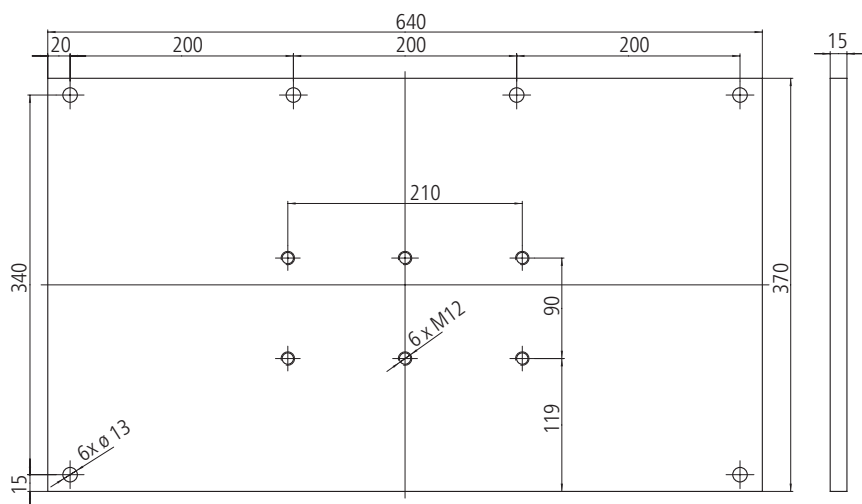


* Depending on the width of the awning, the positioning of the mounting plates may vary.



Mounting plate 240 x 280 x 15 mm




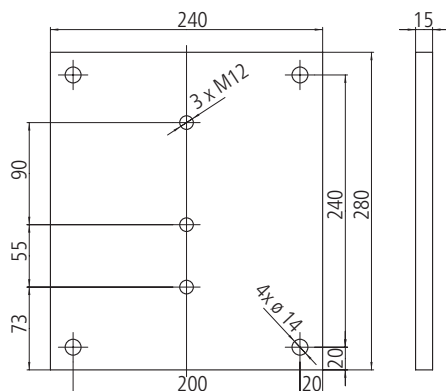


Minimum spacing distances for installation

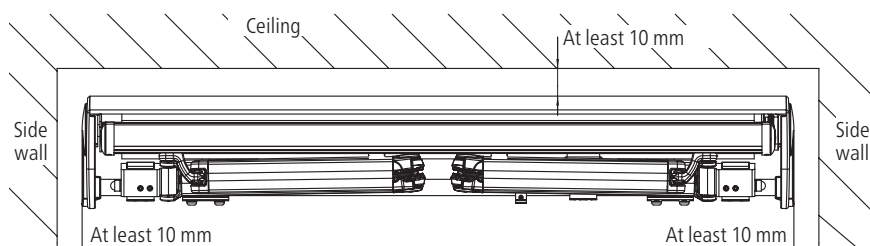






Ceiling mounting

Topas without roof

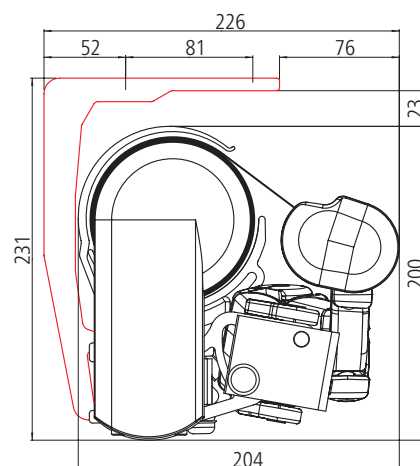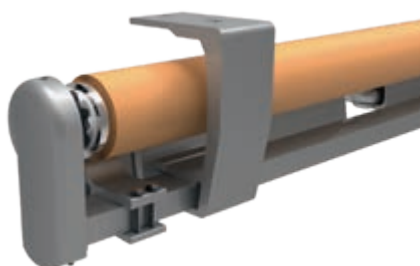

Side view of roofless Topas with sliding support bearing and compact ceiling bracket

Topas with roof



Extraction forces

The extraction force is the force with which the weight of the awning and the wind load pull on each upper fixing. The tables indicate this force in N per upper fixing. It varies depending on the awning size and the wall bracket/mounting plate used.

Selecting the wall bracket and anchoring system:

1. Consult relevant table for extraction force per fixing for selected awning size.
2. Select a wall bracket/mounting plate for which there is fixing material which can resist the indicated extraction force. Remember to take into account the spacing, the area which will be damaged if the fixing breaks out, the type of fixing material used and the mounting base.


See separate bracket overview for other bases.

- 1 standard wall bracket (85 mm) plus 1 standard wall bracket (85 mm) as a central bracket from 401 cm, 1 standard wall bracket (85 mm) per awning arm, Fasteners: 4 in all
- 1 standard wall bracket (85 mm) plus 1 standard wall bracket (85 mm) as a central bracket from 401 cm, 2 standard wall brackets (85 mm) per awning arm, Fasteners: 8 in all
- 1 wall bracket (260 mm) plus 1 standard wall bracket (85 mm) as a central bracket from 401 cm, 2 wall brackets (260 mm) per awning arm, Fasteners: 16 in all
- Mounting plate (280 x 240 mm) incl. 1 standard wall bracket (85 mm), standard wall bracket (85 mm) incl. base plate, Fasteners: 8 in all

Wall mounting on C20/25 concrete with up to 200 mm of facing extraction force in N per upper fixing for wall bracket

Width in cm	Projection in cm					
	150	200	250	300	350	400
250	818	1232	1776	2359	3128	4399
	409	616	888	1180	1564	2200
	205	308	444	590	782	1100
	238	358	516	684	908	1276
300	939	1419	2042	2716	3592	5088
	470	710	1021	1358	1796	2544
	235	355	511	679	898	1272
	272	412	592	788	1042	1476
350	1060	1606	2308	3074	4055	5776
	530	803	1154	1537	2028	2888
	265	402	577	769	1014	1444
	308	466	670	892	1176	1676
400	1181	1792	2573	3432	4518	6464
	591	896	1287	1716	2259	3232
	295	448	643	858	1130	1616
	342	520	746	996	1310	1874
450	1303	1979	2839	3790	4982	7253*
	652	990	1420	1858	2491	3627
	326	495	710	948	1246	1813
	378	574	824	1100	1444	2074
500	1424	2166	3104	4148	5444	7541*
	712	1083	1552	2074	2722	3771
	356	542	776	1037	1361	1885
	412	628	900	1202	1580	2274
550	1545	2352	3370	4463	5889*	8229*
	773	1176	1685	2232	2945	4165
	386	588	843	1119	1479	2132
	448	682	978	1298	1716	2474
600	1666	2539	3635	4822	6335*	8717*
	833	1270	1818	2411	3168	4409
	417	635	909	1206	1584	2204
	484	736	1054	1398	1828	2574
650	1787	2726	3955	5202	6880*	9406*
	894	1363	2028	2601	3440	4753
	447	682	1114	1501	1970	2777
	518	790	1292	1740	2286	3272
700	1272	1941	2816	3721	4817*	6633*
	636	971	1408	1861	2409	3332
	318	485	704	930	1204	1666
	370	562	822	1084	1406	1950


* 2 brackets required per awning arm

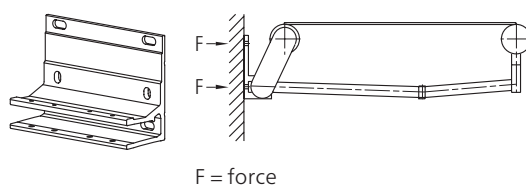

F = force

Extraction forces

- 1 ceiling bracket with standard wall bracket (85 mm),
1 ceiling bracket with standard wall bracket as central bracket from 401 cm,
1 ceiling bracket with standard wall bracket (85 mm) per awning arm,
Fasteners: 4 in all
- 1 ceiling bracket, compact,
1 ceiling bracket, compact as central bracket from 401 cm,
1 ceiling bracket, compact per awning arm,
Fasteners: 4 in all

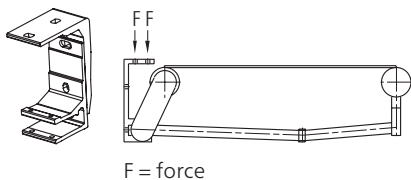

Ceiling installation (on C20/25 concrete)

Extraction force in N per upper fastener in ceiling bracket


Width in cm	Projection in cm					
	150	200	250	300	350	400
250	917	1367	1963	2612	3469	4875
	459	684	982	1306	1735	2438
300	1060	1582	2264	3016	3991	5645
	530	791	1132	1508	1996	2823
350	1204	1796	2565	3419	4512	6414
	602	898	1283	1710	2256	3207
400	1347	2010	2867	3823	5034	7183
	674	1005	1434	1912	2517	3592
450	1490	2225	3168	4226	5556	7953*
	745	1113	1584	2113	2778	3977
500	1634	2439	3469	4630	6929*	8722*
	817	1220	1735	2315	3465	4361
550	1777	2654	3770	5719	7533*	9492*
	889	1327	1885	2860	3767	4746
600	1921	2868	4071	6187	8142*	10261*
	961	1434	2036	3094	4071	5131
650	2064	3083	4937	6654	8751*	11053*
	1032	1542	2469	3327	4376	5527
700	1472	2198	3522	4748	6239	7867
	736	1099	1761	2374	3120	3934

* 2 brackets required per awning arm

Rafter mounting

Shear forces in N per bracket for rafter mounting

- 1 rafter bracket plus
1 standard wall bracket (85 mm),
one of each for left and right,
1 rafter bracket plus 1 standard wall bracket (85 mm) as central bracket from a width of 401 cm
- 1 rafter bracket plus
1 mounting plate for rafters plus
1 standard wall bracket (85 mm),
one of each for right and left,
1 rafter bracket plus 1 mounting plate for rafters plus
1 standard wall bracket (85 mm) as a central bracket from a width of 401 cm

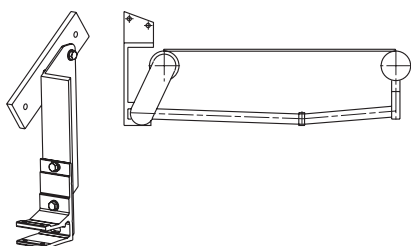

Width in cm	Projection in cm					
	150	200	250	300	350	400
250	1195	1796				
	558	801				
300	1374	2069	2982			
	645	926	1295			
350	1553	2342	3370	4504		
	732	1051	1467	1925		
400	1732	2615	3757	5027	6642	
	819	1176	1638	2152	2805	
450	1911	2888	4145	5550	7322	10493
	907	1302	1810	2378	3094	4377
500	2090	3160	4532	6073	4546	5735
	994	1427	1981	2604	1913	2394
550	2269	3433	4920	7496	4944	6239
	1081	1552	2153	3195	2081	2605
600	2448	3706	5307	8103	5342	6749
	1168	1677	2325	3455	2249	2816
650	2627	3979	6434	8710	5740	7247
	1256	1802	2795	3716	2418	3027
700	2095	3108	4942	6638	8749	11007
	1056	1465	2207	2893	3746	4659