



Cassette awning

markilux 1710 stretch

The classic torque bar awning with a designer look. Large projections at limited widths – the perfect solution for narrow reveals, balconies and patios.



reddot design award
winner 2012



German
Design Award
NOMINEE 2014


markilux.com

markilux
safe timeless beautiful

Product characteristics

Wind resistance class 2



Beaufort 5 → 7.5–10.4 m/s → 28–37 km/h → 17–23 mph

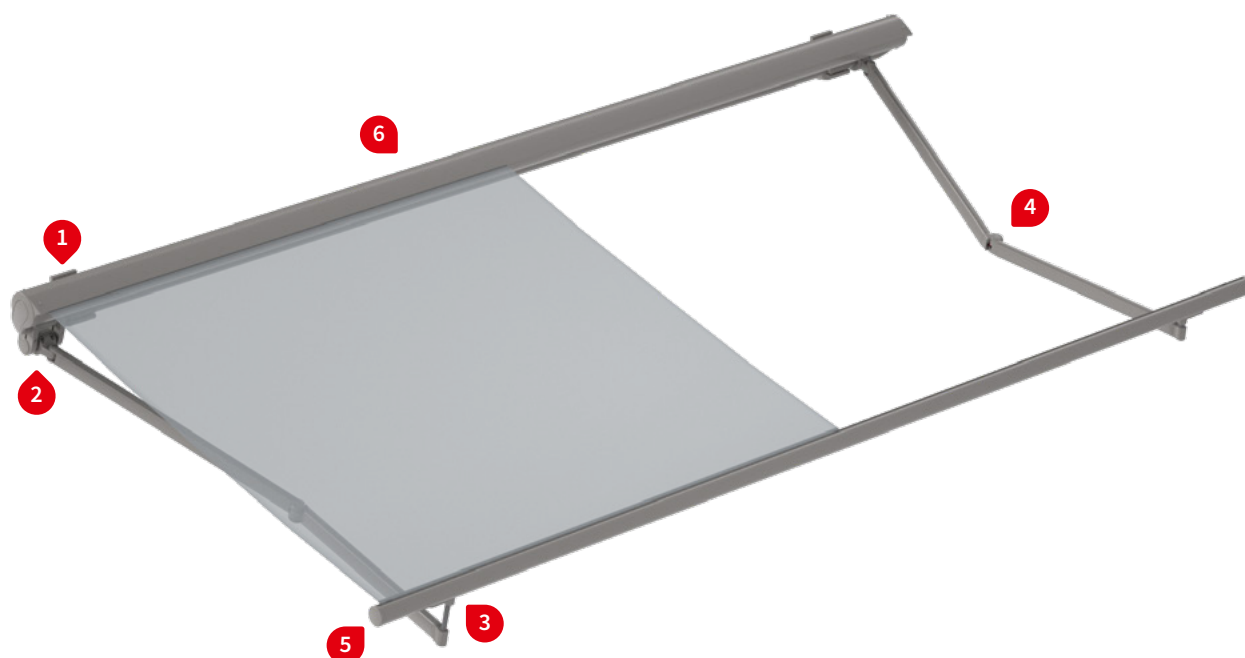


1 face fixture

1 face fixture,
maximum pitch 25°

1 top fixture

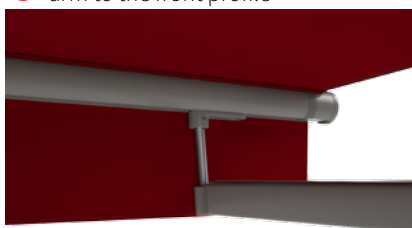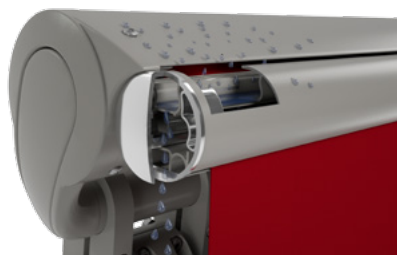2 folding arm suspended from the
torque bar3 connection of the lower folding
arm to the front profile4 bionic tendon made of high-tech
fibres for optimum power transference5 special water drainage method, cover
pocket hidden in the front profile

6 wall sealing profil 1), up to a pitch of 15°

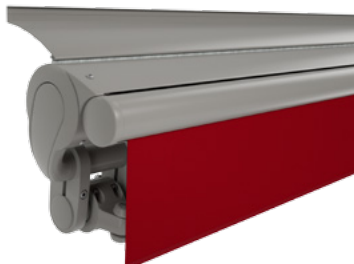

1) optional configuration

Product characteristics

Description

- award-winning, teardrop-shaped cover cassette employing special folding arm technology, shading areas with greater depth than width.

Special features

- awning with an extremely torsion-resistant, round torque bar
- round, fluid transition from the round torque bar to the round cassette
- cover cassette with tiered arms in front, which make greater projections than widths possible
- even when the awning is fully extended, the roller tube is completely protected

Dimensions

- awning in the standard version: depth 252 mm, height 289 mm
- single unit: minimum width 123 cm at the smallest projection of 150 cm minimum width 248 cm at the largest projection of 350 cm

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability ensures near perfect cover performance even at the largest widths
- the roller support bracket is made of die-cast aluminium, powder coated, with integrated hidden cable canal when motor driven

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette in two parts
- circular front profile with integrated gutter
- round steel torque bar Ø 50 mm, galvanised both inside and out, powder coated

Folding arms

- profiles in extruded aluminium, in façade quality, powder coated
- moving parts made of drop-forged aluminium – the arms are therefore extremely fracture resistant
- pivot bolts in stainless steel run in Teflon-coated bronze bushes – practically maintenance free, virtually silent and extremely hard-wearing
- power transference via the innovative Bionic tendon at the elbow joint, made of high tensile, hightech fibres – low in friction, noiseless, insensitive to corrosion and UV resistant, tested by the Fraunhofer institute

Side caps

- the roller support bracket insert sections are made of high-quality plastic, powder coated or in a polished chrome finish
- the front profile end caps are made of high-quality plastic, powder coated or in polished chrome, with drainage holes

Fixture brackets

- face fixture, top fixture, eaves fixture
- extruded aluminium, powder coated
- pitch range 5°–25°, infinitely adjustable
- spacer plates, stand-off brackets and other accessories are available



Frame and end cap colours

markilux frame colours without surcharge

traffic white RAL 9016

metallic aluminium RAL 9006



grey brown, similar to RAL 8019

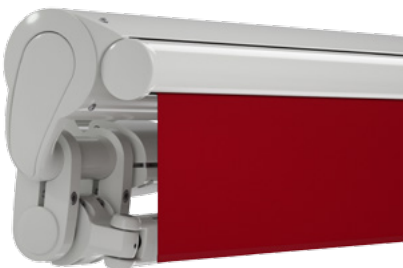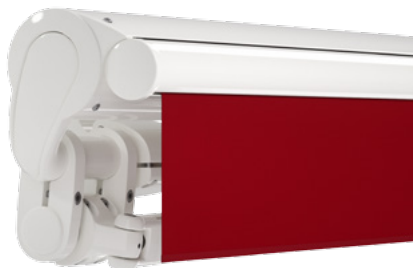


off-white textured finish, 5233 ¹⁾

stone grey metallic, 5215 ¹⁾

anthracite metallic, 5204 ¹⁾

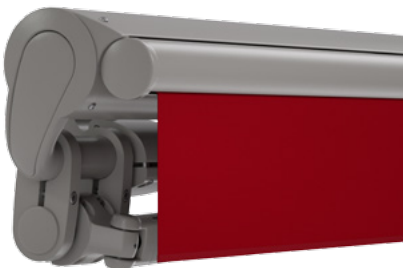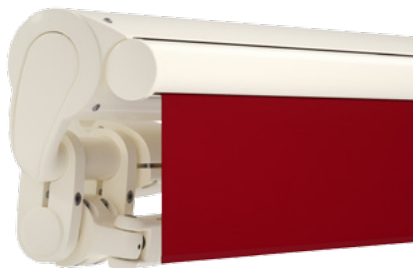



Havana brown textured finish, 5229 ¹⁾

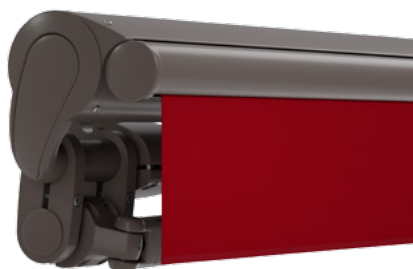

off-white textured finish, 5233 ¹⁾
insert and front profile end cap
in polished chrome

stone grey metallic, 5215 ¹⁾
insert and front profile end cap
in polished chrome

anthracite metallic, 5204 ¹⁾
insert and front profile end cap
in polished chrome

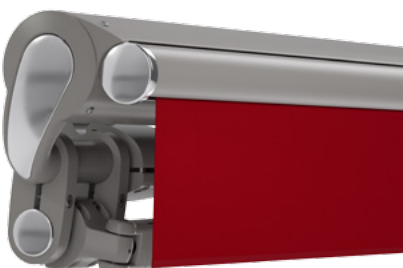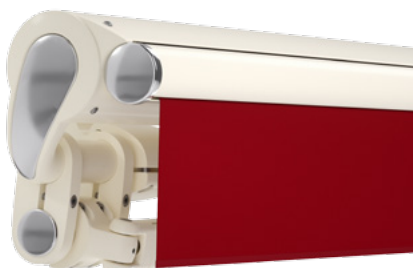

Combination options – possible in any frame colour.

Non-standard powder-coated finish





Bespoke frame colours at a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

¹⁾ textured finish

Colours may differ slightly from those depicted in both hue and finish.

Dimensions and configuration options

Single unit


		Overall awning width							Minimum width			
		150	175	200	225	250	300	350	Motor		Crank handle	
Order dimensions		123 150	151 175	176 200	201 225	226 250	251 300	301 350				
H	150	2)		1)	—	—	—	—	130	123	132	125
	200	2)	2)			1)	—	—	155	148	157	150
	250	—	2)	2)			1)	—	180	173	182	175
	300	—	—	2)	2)			1)	205	198	207	200
	350	—	—	—	2)	2)			230	223	232	225

dimensions in cm


1) = intermediate size on request

2) = observe the minimum widths!

H = projection

 = 2 folding arms,
2 brackets

 = 2 standard arms

 = 2 bespoke arms
(surcharge)

Operation

	standard	optional
crank handle	✓	—
spring-assisted crank handle	—	✓
hard-wired motor	—	✓
silentec motor (optionally with an external io / RTS receiver) ¹⁾	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓
radio-controlled motor RTS, 433 MHz with manual override ¹⁾	—	—

1) for awnings with a maximum of 2 arms

Coupled Awning

not available

Awning cover

	fabric range no.	standard	optional
sunvas	301.. / 309..–315..	✓	—
perla	370 ..	—	✓
sunsilk	324.. / 325.. / 328.. / 369..	✓	—
perla FR	374.. / 375..	—	✓
perfortex	331.. / 332..	—	—
transolair	338..	—	—
vuscreen Alu	317..	—	—
Soltis Perform 92	92-20..	—	—
glass fibre screen	272..	—	—
valance, height 25 cm		✓	—

Shadeplus / drop valance

not available

Optional accessories

wall sealing profile (effective up to a maximum awning pitch of 15°)

infrared heater 2000 W / 2500 W

infrared heater 2500 W with integrated radio-controlled receiver 868 MHz io

LED spotline – light bar 110 × 70 mm with 5 W LED spotlights, width 180 cm / 3 spots or 300 cm / 5 spots

LED spotline io – light bar 110 × 70 mm with 5 W LED spotlights with integrated dimmable radio-controlled receiver, width 180 cm / 3 spots or 300 cm / 5 spots

Halogen spotline – light bar 89 mm × 40 mm with 20 W halogen spotlights, 200 cm / 3 spots or 300 cm / 5 spots

automatic controls (light, wind, rain)

N.B! Important background information can be found in the chapter “Optional Accessories”.

Fixture options

wall bracket 100 mm 70867.

spreader plate A 430 × 160 × 12 mm 75326.

spreader plate B 300 × 400 × 12 mm 75325.

stand-off bracket wide 80–300 mm 77968.

top fixture bracket 90 mm 70868.

eaves fixture bracket 90 mm, 150 mm plate 71612.

eaves fixture bracket 90 mm, 270 mm plate 71659.


flat plate and angled bracket for eaves fixture machine finish, 500 mm plate 716620

spreader plate 260 × 60 × 12 mm for eaves fixture bracket 75383.

angled profile for eaves fixture 100 × 100 × 10 mm, undrilled by the metre (max. 3 m) 79380.

Bracket fixture range

Awning with 2 folding arms

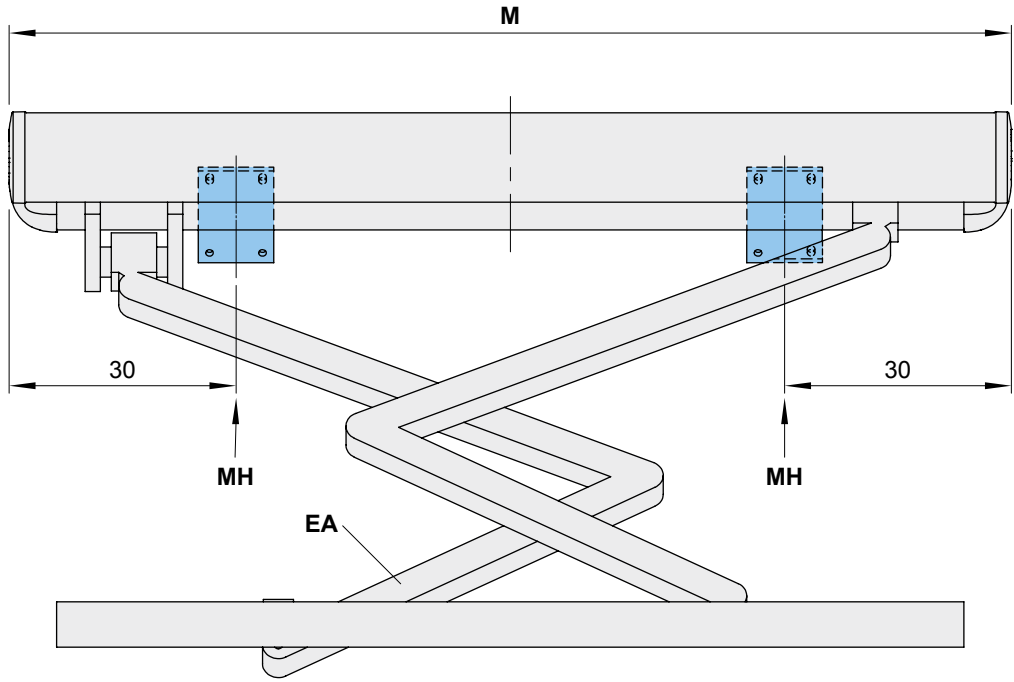

dimensions in cm


		Overall awning width						
		150	175	200	225	250	300	350
Order dimensions		123	151	176	201	226	251	301
		150	175	200	225	250	300	350
		dimensions in cm						
	BHT	No. of brackets No. of fixing points						
W	10	2 6						
BP		A 2 16 B 2 8						
DE 1)	9	2 8						
DA 1)	9	2 8						

dimensions in cm

- 1)
- = for information regarding other fixture options, please refer to the section “Pull-out forces” markiluxpro.com in the online Mediathek at markiluxpro.com
- BHT
- = bracket width
- BP
- = spreader plate A or B, to be positioned behind the folding arm
- DA
- = eaves fixture bracket
- DE
- = top fixture bracket
- EA
- = low folding arm (opposite the drive side)
- M
- = *order dimension* = awning width
- MH
- = bracket centre
- W
- = face fixture bracket


Face fixture

Fixtures, fittings and accessories



face fixture bracket
100 mm

70867.




spacer plate for
face fixture
100 × 150 × 20 mm
N.B!
stack to a max. height of
200 mm

718231




spacer plate for
face fixture
100 × 150 × 12 mm

718241




cover plate
for spacer plate
and stand-off brackets
in the case of external
insulation
230 × 210 × 2 mm

71843.



wall sealing profile
available by the metre


77780.



bolt reduction
assembly
pack 10 pcs

M 16 → M 12 | M 16 → M 10 | M 12 → M 10 | M 10 → M 10


10

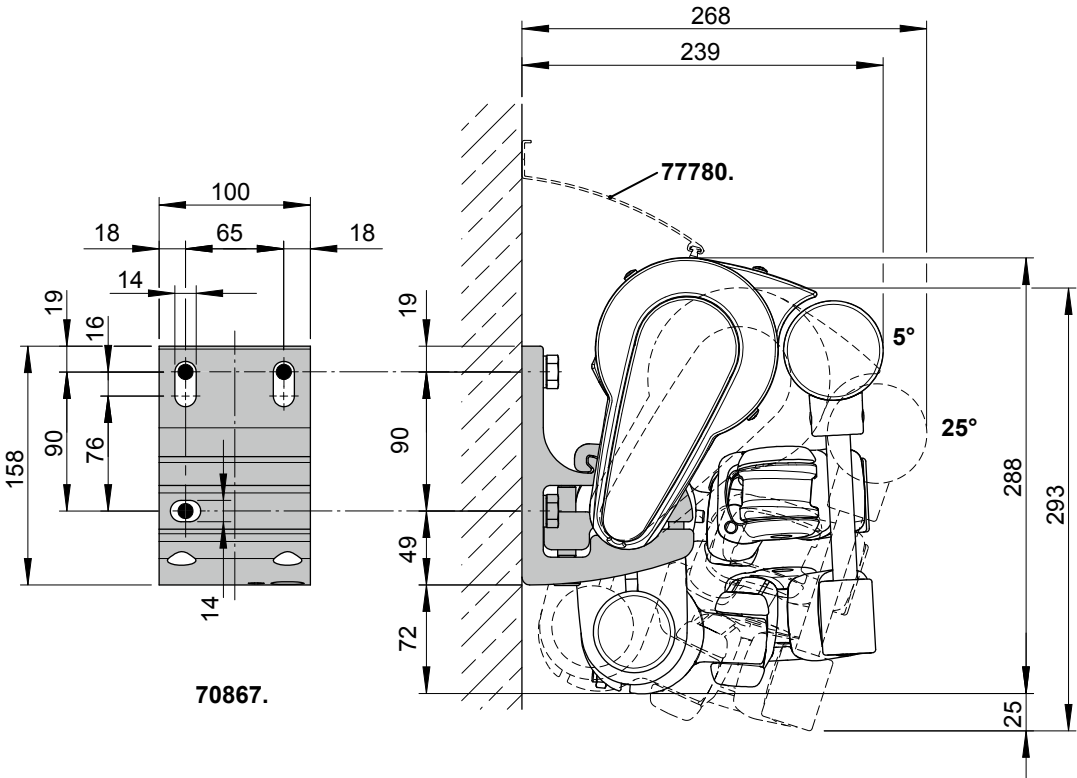

dimensions in mm

Face fixture with spreader plate A


Fixtures, fittings and accessories



face fixture bracket

100 mm


70867.



spreader plate A
face fixture


430 × 160 × 12 mm

75326.



bolt reduction
assembly


pack 10 pcs

$$M_{16} \rightarrow M_{12} \mid M_{16} \rightarrow M_{10} \mid M_{12} \rightarrow M_{10} \mid M_{10} \rightarrow M_{10}$$


wall sealing profile

available by the metre


77780.



stand-off strip for
wall sealing profile

available by the metre


751971

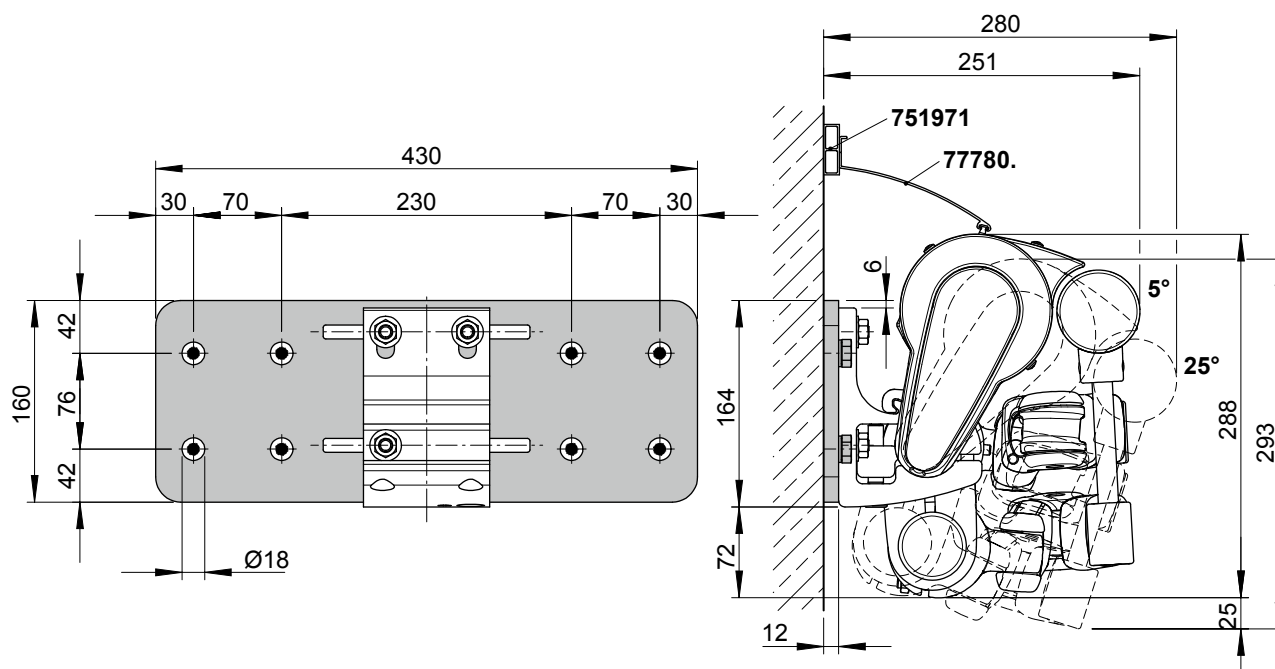

dimensions in mm


Face fixture with spreader plate B

Fixtures, fittings and accessories




face fixture bracket
100 mm

70867.




spreader plate B
face fixture
300 × 400 × 12 mm

75325.




bolt reduction
assembly
pack 10 pcs

M 16 → M 12 | M 16 → M 10 | M 12 → M 10 | M 10 → M 10




wall sealing profile
available by the metre

77780.



stand-off strip for
wall sealing profile
available by the metre


751971

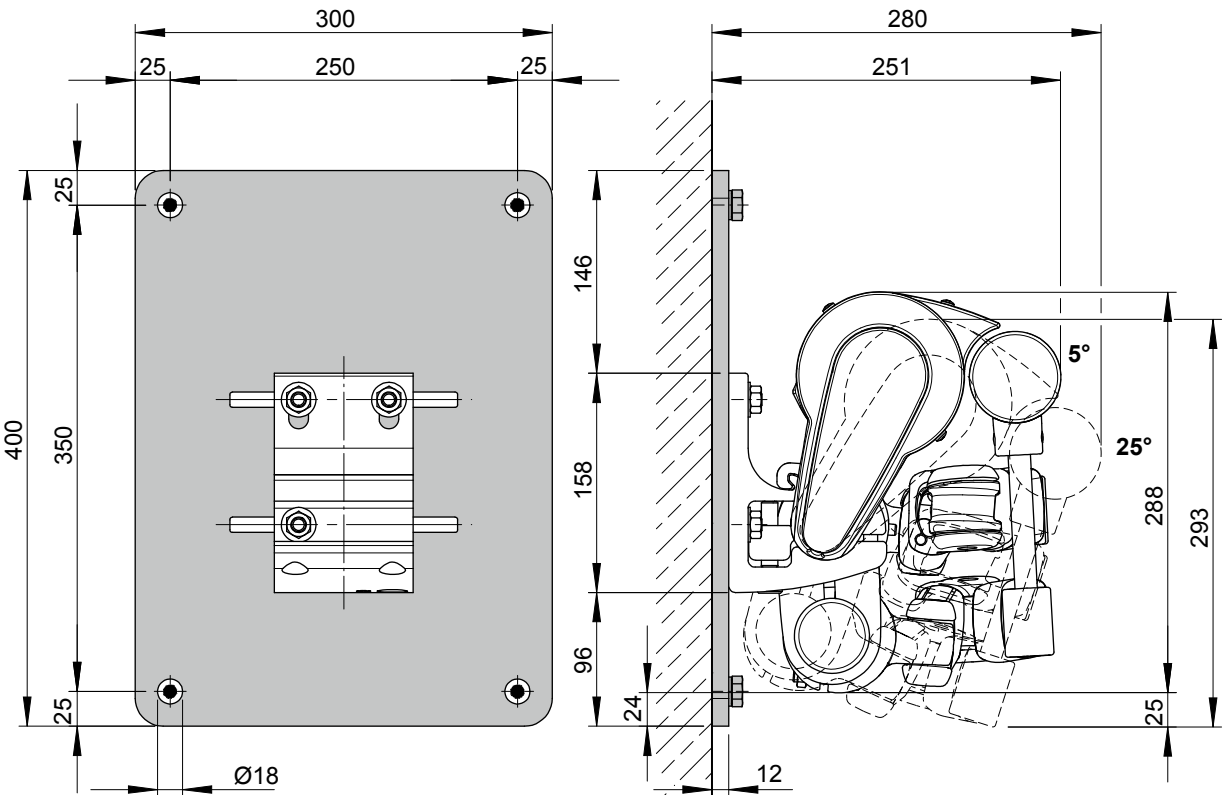

dimensions in mm


Face fixture with stand-off bracket

Fixtures, fittings and accessories




face fixture bracket
100 mm

70867.



stand-off bracket
for face fixture bracket
70867.


77968.



cover plate
for spacer plate
and stand-off brackets
in the case of external
insulation


230 × 210 × 2 mm

71843.




wall sealing profile
available by the metre

77780.



bolt reduction
assembly
pack 10 pcs


M 16 → M 12 | M 16 → M 10 | M 12 → M 10 | M 10 → M 10

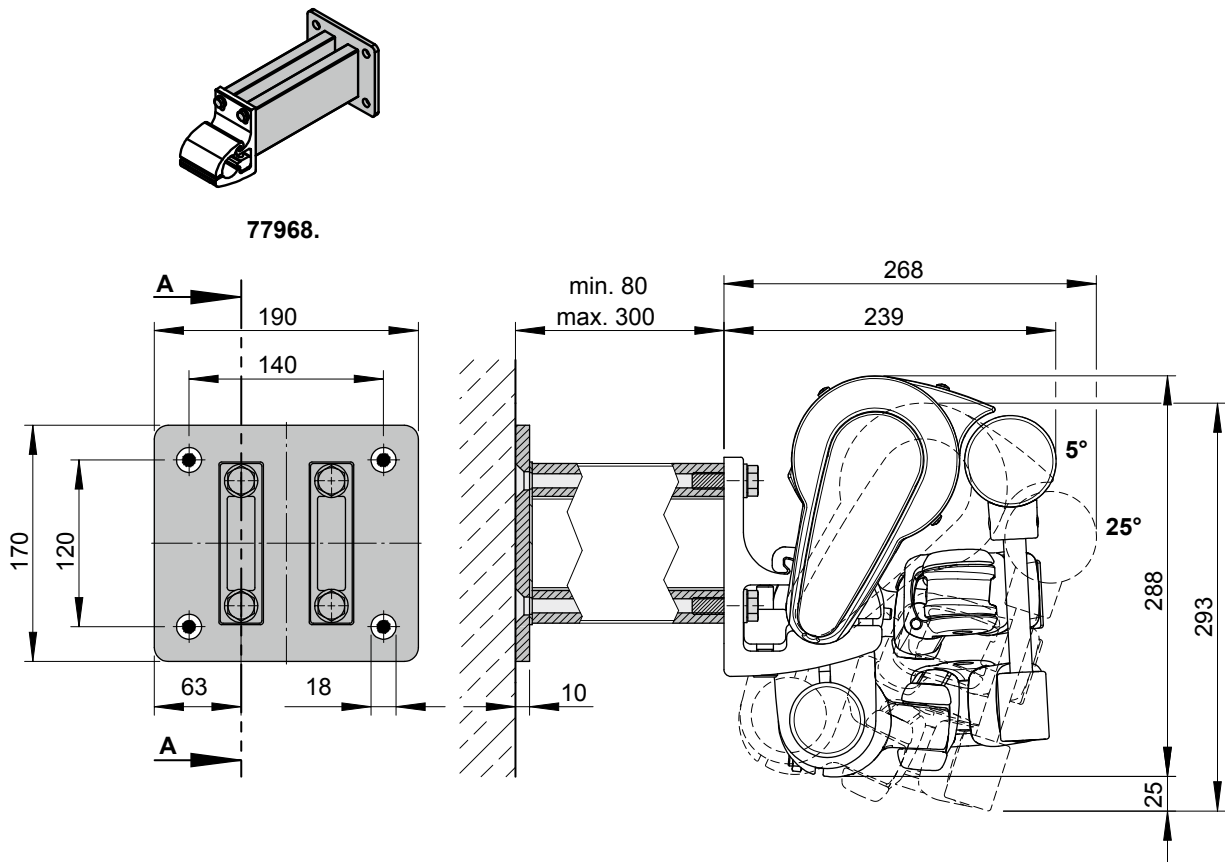

dimensions in mm


Top fixture

Fixtures, fittings and accessories



top fixture bracket
90 mm

70868.




spacer plate for
top fixture
90 × 140 × 20 mm
N.B!
stack to a max. height of
200 mm

716311



spacer plate for
top fixture
90 × 140 × 12 mm







716411

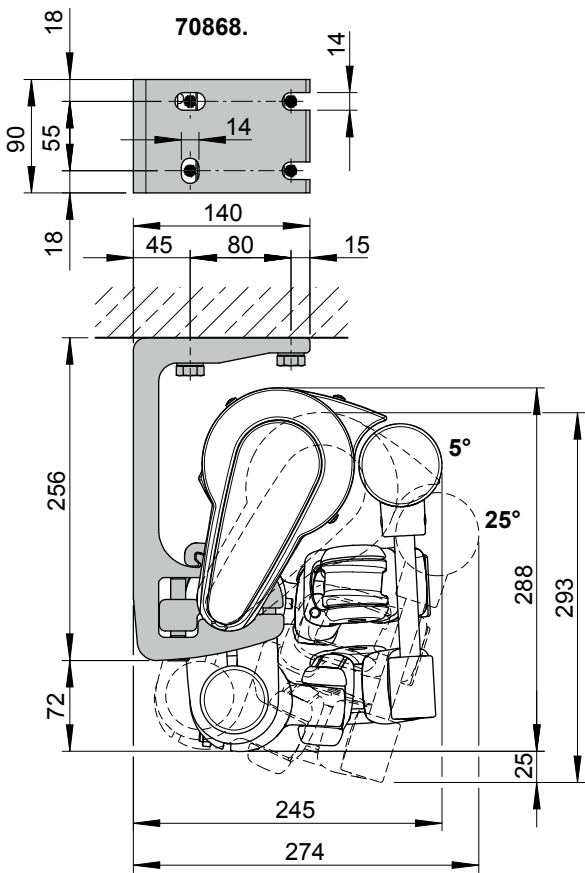


dimensions in mm

Eaves fixture


Fixtures, fittings and accessories

 <p>eaves fixture bracket complete set height of flat plate: 150 mm 90 mm</p> <p>70871.</p>	 <p>top fixture bracket 90 mm</p> <p>70868.</p>	 <p>eaves fixture bracket 150 mm</p> <p>71612.</p>
 <p>eaves fixture bracket 270 mm please refer to "Eaves fixture with spreader / backing plate"</p> <p>71659.</p>	 <p>flat plate and angled bracket for eaves fixture machine finish</p> <p>716620</p>	 <p>angled profile eaves fixture bracket 100 × 100 mm Sold by the metre, undrilled 793800 = machine finish</p> <p>79380.</p>

With eaves fixture bracket, 150 mm plate (71612.)

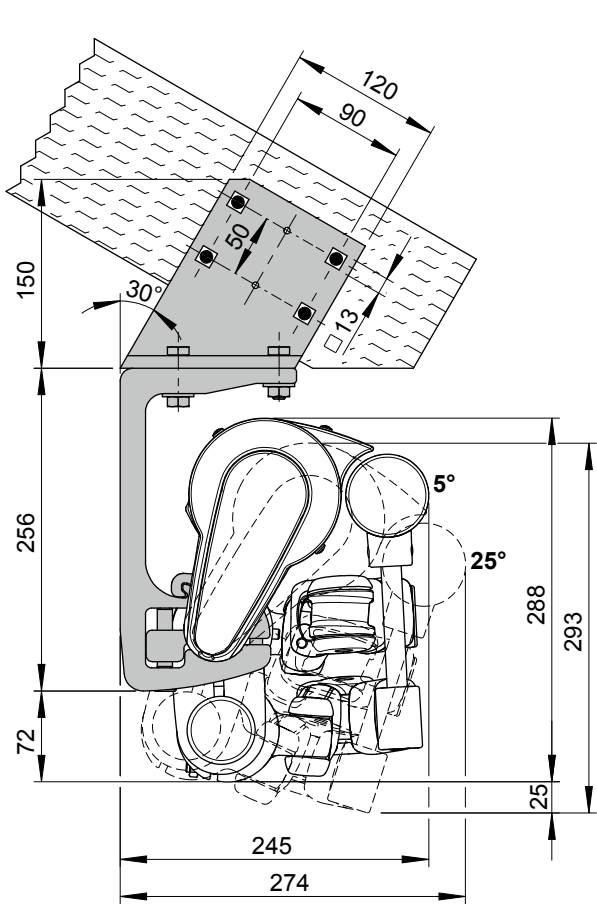


With eaves fixture bracket, 270 mm plate (71659.)

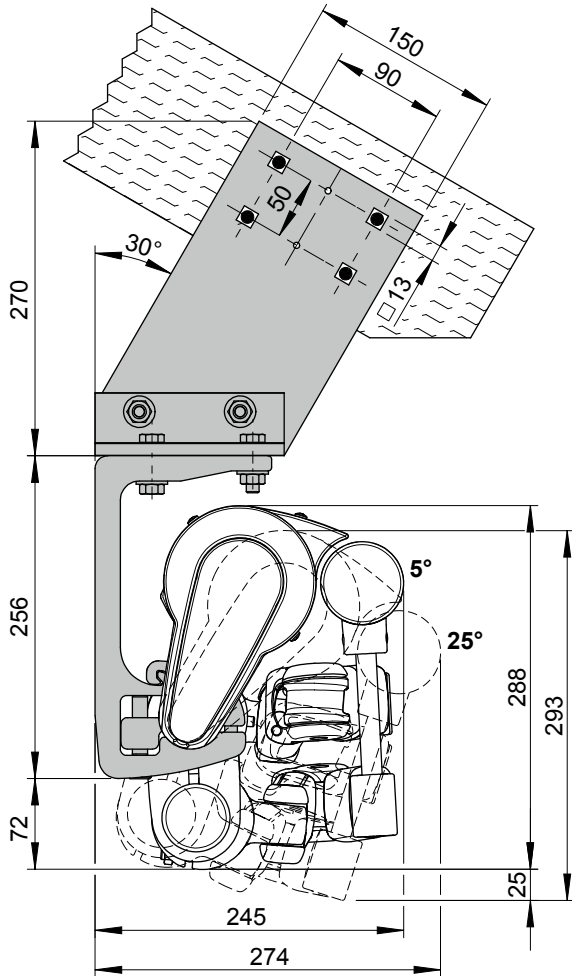

dimensions in mm


Eaves fixture with additional plate

Fixtures, fittings and accessories




eaves fixture bracket
complete set
height of flat
plate: 150 mm
90 mm

70871.




top fixture bracket
90 mm

70868.




eaves fixture bracket
150 mm

71612.



eaves fixture bracket
270 mm
please refer to "Eaves
fixture with spreader /
backing plate"

71659.




supplementary flat plate
eaves fixture
260 × 60 × 12 mm
please refer to "Eaves
fixture with spreader /
backing plate"


75383.

10

With eaves fixture bracket, 150 mm plate (71612.)

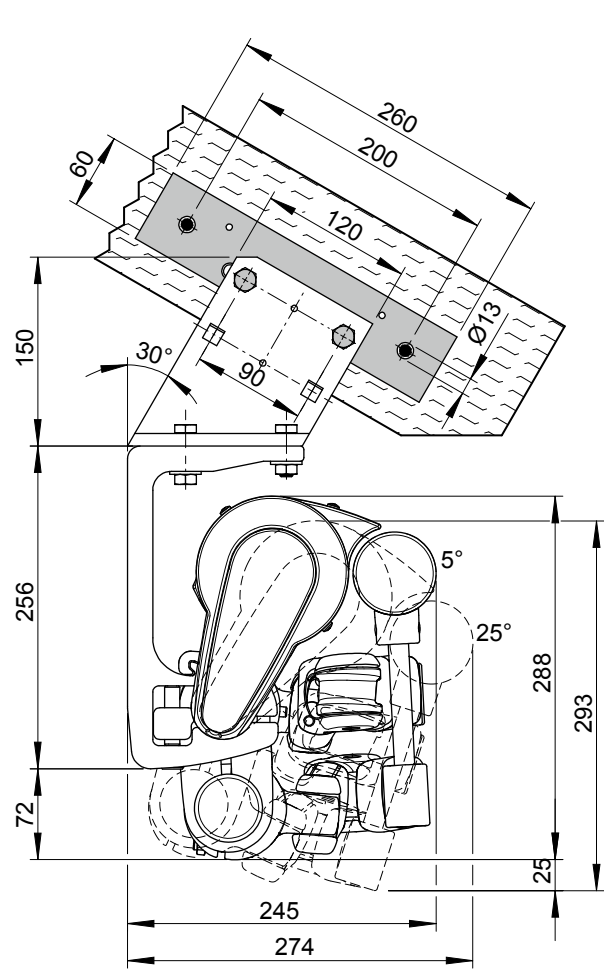


With eaves fixture bracket, 270 mm plate (71659.)

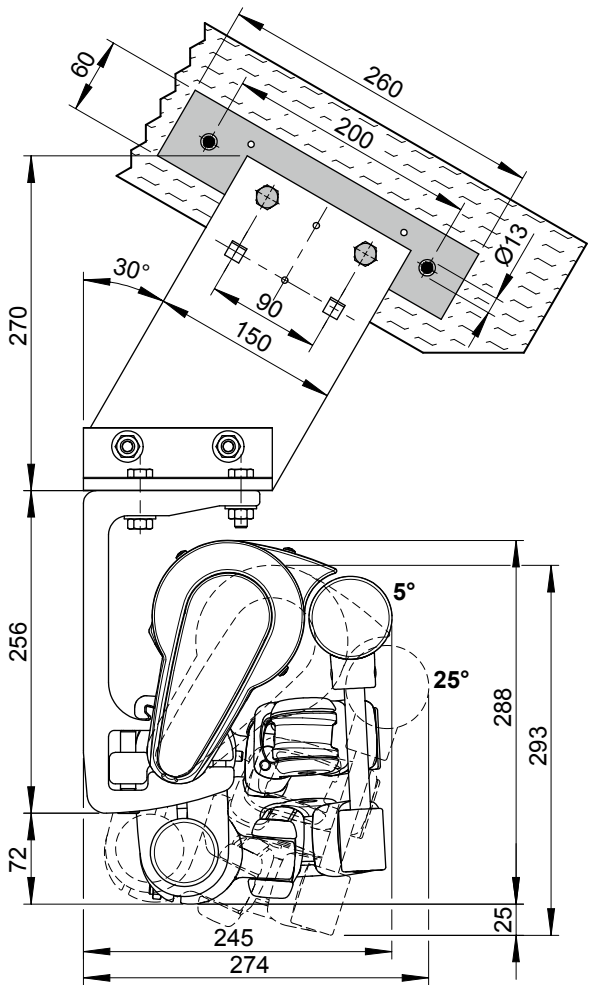

dimensions in mm


Eaves fixture with adjustable bracket

Fixtures, fittings and accessories




top fixture bracket
90 mm

70868.




adjustable
eaves fixture bracket

71198.

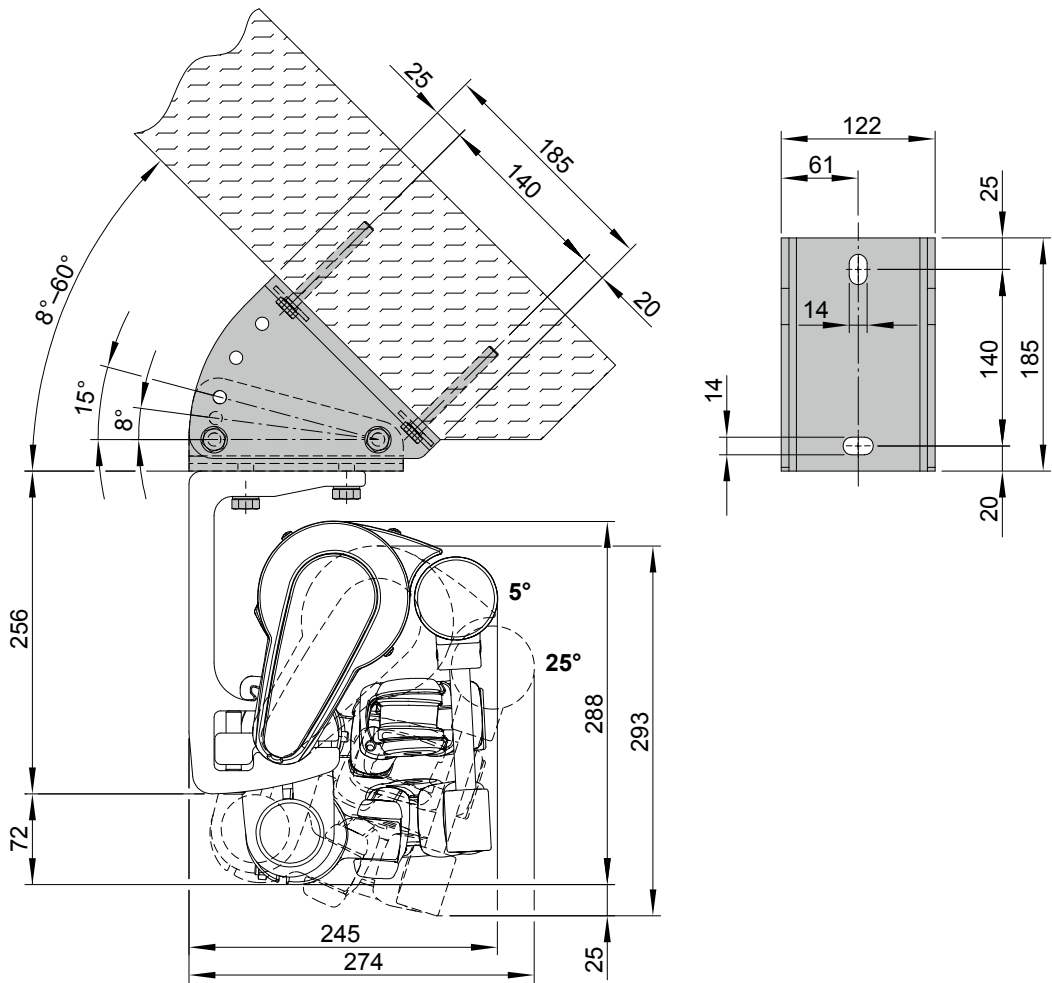


dimensions in mm

Face fixture, manual gearbox operation, dimensions at pitches between 5°–25°

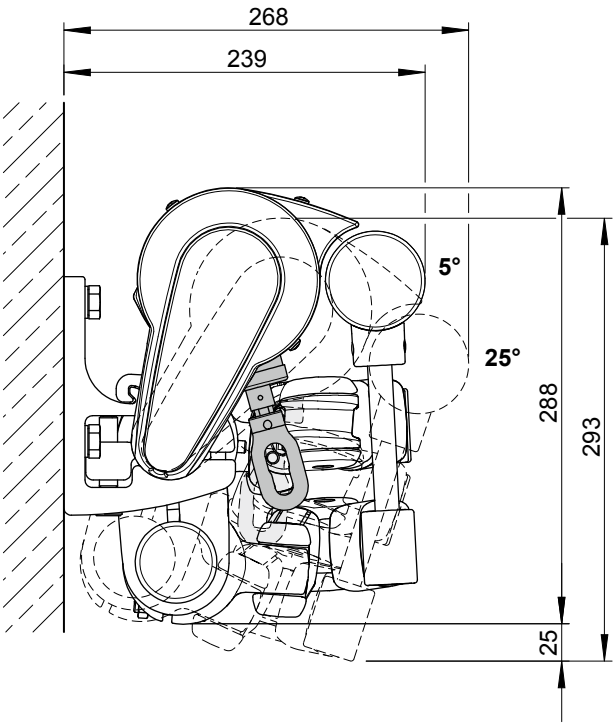



Face fixture with wall sealing profile, max. pitch 15°

pitch (W)	approx. height in mm (X)
5°	136
10°	132
15°	127
20°	—
25°	—

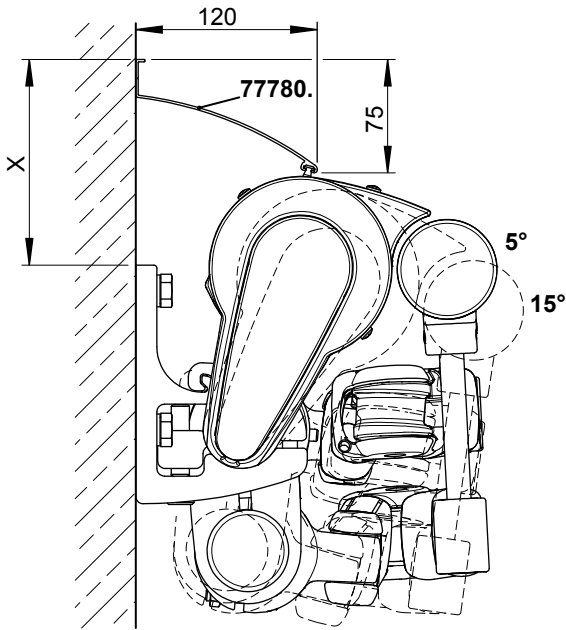

dimensions in mm

Motor cable exit point

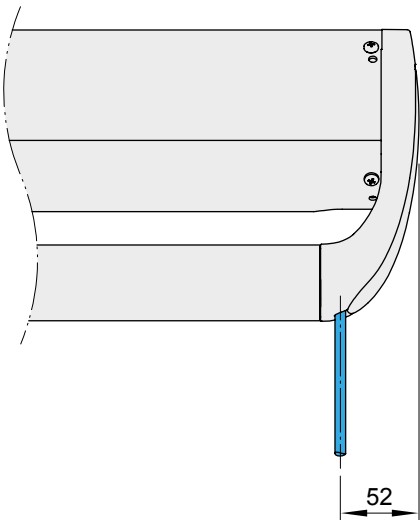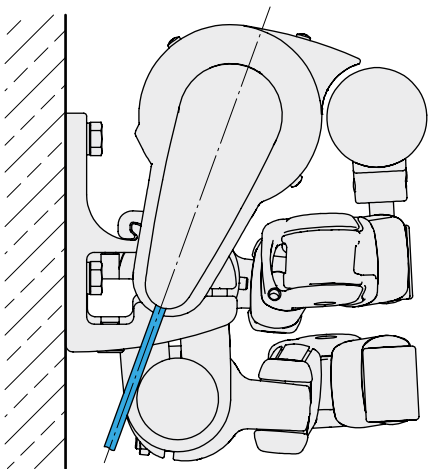

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10**
- 11
- 12
- 13
- 14
- 15
- 16
- 17

dimensions in mm

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10**
- 11
- 12
- 13
- 14
- 15
- 16
- 17